MIL-F-83798/2A
12 January 1977


SUPERSEDING
MIL-F-83798/2
1 AUGUST 1974

MILITARY SPECIFICATION SHEET

# FITTINGS, RUBBER HOSE, LIGHTWEIGHT, MEDIUM PRESSURE, FLARED, SWIVEL NUT, 45 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fittings described herein shall consist of this document and the latest issue of specification MIL-F-83798.

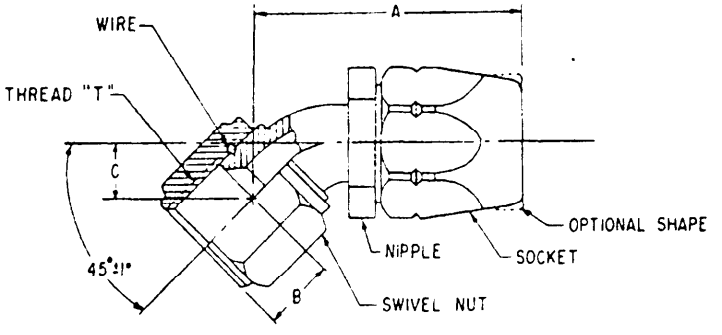


| PART NUMBER | THREAD "T" | A MAX | | B | | C | | WEIGHT MAX | |
|---|---|---|---|---|---|---|---|---|---|
| | | IN | MM | IN ±0.03 | MM ±0.8 | IN ±0.635 | MM ±0.484 | LBS | GMS |
| MS3798/2-3 | 3/8-24UNJF-3B | 1.74 | 44.20 | 0.34 | 8.64 | 0.340 | 8.636 | 0.056 | 25.40 |
| MS3798/2-4 | 7/16-20UNJF-3B | 1.72 | 43.69 | 0.37 | 9.40 | 0.352 | 8.941 | 0.074 | 33.57 |
| MS3798/2-5 | 1/2-20UNJF-3B | 1.84 | 46.74 | 0.38 | 9.65 | 0.415 | 10.541 | 0.093 | 42.18 |
| MS3798/2-6 | 9/16-18UNJF-3B | 2.00 | 50.80 | 0.38 | 9.65 | 0.446 | 11.328 | 0.054 | 24.49 |
| MS3798/2-8 | 3/4-16UNJF-3B | 2.20 | 55.88 | 0.44 | 11.18 | 0.457 | 11.608 | 0.085 | 38.56 |
| MS3798/2-10 | 7/8-14UNJF-3B | 2.42 | 61.47 | 0.50 | 12.70 | 0.537 | 13.640 | 0.121 | 54.88 |
| MS3798/2-12 | 1-1/16-12UNJ-3B | 2.73 | 70.87 | 0.57 | 14.48 | 0.625 | 15.824 | 0.190 | 86.18 |
| MS3798/2-16 | 1-5/16-12UNJ-3B | 3.06 | 77.72 | 0.63 | 16.00 | 0.659 | 16.739 | 0.295 | 133.81 |
| MS3798/2-20 | 1-5/8-12UNJ-3B | 3.45 | 87.63 | 0.64 | 16.20 | 0.768 | 19.507 | 0.526 | 238.59 |
| MS3798/2-24 | 1-7/8-12UNJ-3B | 3.65 | 92.71 | 0.77 | 19.56 | 0.867 | 22.022 | 0.684 | 310.26 |
| MS3798/2-32 | 2-1/2-12UNJ-3B | 4.26 | 108.20 | 0.92 | 23.37 | 1.065 | 27.051 | 1.152 | 522.54 |

NOTES:

1. Material: Socket: Aluminum, Per QQ-A-225/6, either SAE 2024-T6 or SAE 2024-T851; or Per QQ-A-225/8, either SAE 6061-T6 or SAE 6061-T651. Nipple and Nut: Sizes -3, -4 and -5, carbon steel, SAE 1137, SAE 11L37 or SAE 1141 Per QQ-S-637. Size -6 and above, aluminum, Per QQ-A-225/8 or WW-T-700/6, SAE 6061-T6; or Per QQ-A-225/6, SAE 2024-T6 or SAE 2024-T851. Wire (Swivel Nut to Nipple): Sizes -3, -4 and -5, corrosion-resistant steel, class 305, condition A Per QQ-S-763 or composition 304, condition A Per QQ-W-423. Size -6 and above, aluminum, SAE 2024-T4 Per QQ-A-225/6.
2. Swivel nut and seat of nipple shall mate with MS33656.
3. If required, lockwire holes to be drilled in accordance with AS1043 and suffix "L" added to part number. Example: M83798/2-10L.
4. This specification sheet takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on the date of invitation for bid.
6. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Air Force - 99
Army - AV

Review Activities:
Army - AT, ME
NAVY - AS
DSA - CS

User Activities:
Air Force - 11
Army - AV
Navy - AS

Preparing Activity:
Air Force - 99

Agent:
DSA - CS

(Project 4730-0583)



FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:43Z
Check the source to verify that this is the current version before use.