INCH-POUND

MIL-DTL-83798/2B
18 September 2000
SUPERSEDING
MIL-F-83798/2A
12 January 1977

DETAIL SPECIFICATION SHEET

FITTINGS, RUBBER HOSE, LIGHTWEIGHT, MEDIUM PRESSURE, FLARED, SWIVEL NUT, 45 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-83798 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

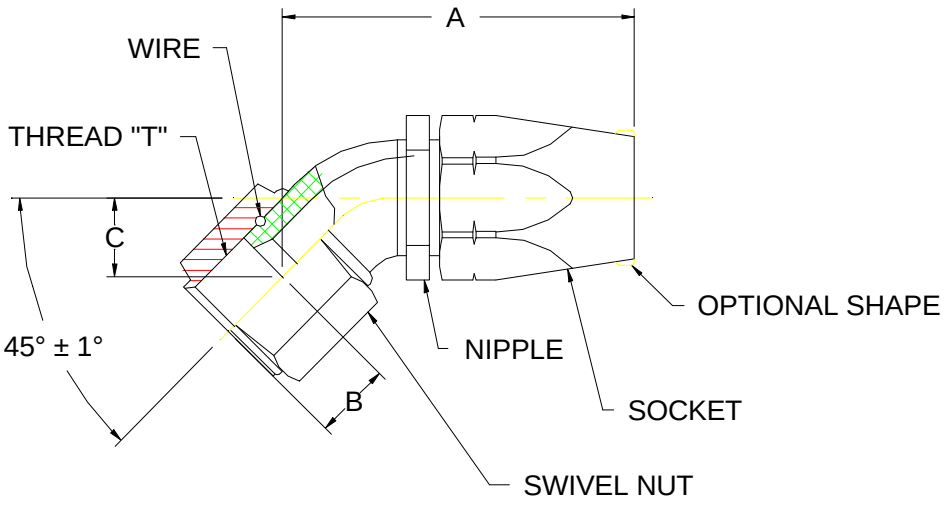

NOTES:

1. See table I for fitting dimensions, weight, and thread size.

FIGURE 1. Fitting, flared, swivel nut, 45 degrees.

AMSC N/A FSC 4730

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:43Z
Check the source to verify that this is the current version before use.

TABLE I. Fitting, dimensions, weight, and thread size.

Dash Number	Thread "T"	A (max)		B		C		Weight (max)	
		in.	mm	in. ±0.03	mm ±0.76	in. ±0.035	mm ±0.889	lbs.	gms.
-3	3/8-24UNJF-3B	1.74	44.20	0.34	8.64	0.340	8.636	0.056	25.40
-4	7/16-20UNJF-3B	1.72	43.69	0.37	9.40	0.352	8.941	0.074	33.57
-5	1/2-20UNJF-3B	1.84	46.74	0.38	9.65	0.415	10.541	0.093	42.18
-6	9/16-18UNJF-3B	2.00	50.80	0.38	9.65	0.446	11.328	0.054	24.49
-8	3/4-16UNJF-3B	2.20	55.88	0.44	11.18	0.457	11.608	0.085	38.56
-10	7/8-14UNJF-3B	2.42	61.47	0.50	12.70	0.537	13.640	0.121	54.88
-12	1-1/16-12UNJ-3B	2.79	70.87	0.57	14.48	0.623	15.824	0.190	86.18
-16	1-5/16-12UNJ-3B	3.06	77.72	0.63	16.00	0.659	16.739	0.295	133.81
-20	1-5/8-12UNJ-3B	3.45	87.63	0.64	16.26	0.768	19.507	0.526	238.59
-24	1-7/8-12UNJ-3B	3.65	92.71	0.77	19.56	0.867	22.022	0.684	310.26
-32	2-1/2-12UNJ-3B	4.26	108.20	0.92	23.37	1.065	27.061	1.152	522.54

REQUIREMENTS:

1. Material: Socket: Aluminum per SAE AMS-QQ-A-225/6 (2024-T6) or SAE AMS4339 (2024-T851) or aluminum per SAE AMS-QQ-A-225/8 (6061-T6) or SAE AMS4117 (6061-T651).

2. Nipple and Nut: Sizes -3, -4, and -5, chrome-molybdenum steel (4130) per SAE AMS6370 or SAE AMS-S-6758; size -6 and above, aluminum per SAE AMS-QQ-A-225/6 (2024-T6) or SAE AMS4339 (2024-T851) or aluminum (6061-T6) per SAE AMS-QQ-A-225/8 or WW-T-700/6.

3. Wire, Swivel Nut to Nipple: Sizes -3, -4, and -5, corrosion-resistant steel per SAE AMS-QQ-S-763 (class 305, condition A) or ASTM A580 (composition 304, condition A); size -6 and above, aluminum per SAE AMS-QQ-A-225/6 (2024-T4).

4. Swivel nut and seat of nipple shall mate with SAE AS4395.

5. If required, lockwire holes to be drilled in accordance with SAE AS1043 and suffix "L" added to part number.

6. This specification sheet takes precedence over documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:43Z
Check the source to verify that this is the current version before use.

7. The Part Identifying Number (PIN) shall be constructed as follows:

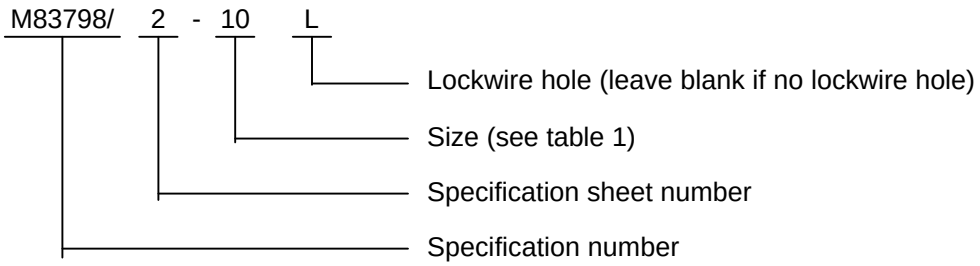

M83798/2-10L indicates: 7/8″ fitting, 37° flare, swivel nut, 45 degrees, with lockwire hole.

Custodians:
Army - AV
Air Force - 99
Navy – AS
DLA - CC

Review activities:
Army - AT
Air Force - 11
Navy - SA

Preparing activity:
DLA - CC

(Project 4730-0736)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:43Z
Check the source to verify that this is the current version before use.