
MIL-F-83798/3A
12 January 1977
SUPERSEDING
MIL-F-83798/3
1 AUGUST 1974

MILITARY SPECIFICATION SHEET

FITTINGS, RUBBER HOSE, LIGHTWEIGHT, MEDIUM PRESSURE, FLARED, SWIVEL NUT, 90 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fittings described herein shall consist of this document and the latest issue of specification MIL-F-83798.

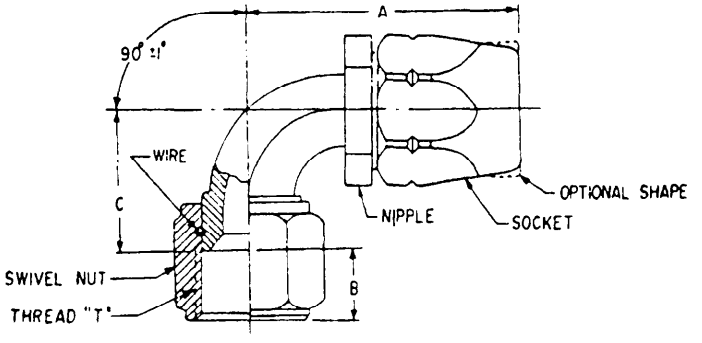

PART NUMBER	THREAD "T"	A MAX		B		C		WEIGHT MAX.	
		IN	MM	IN ±0.03	MM ±0.76	IN ±0.035	MM ±0.889	LBS	GMS
M83798/3-3	3/8-24UNJF-3B	1.58	40.13	0.34	8.64	0.654	16.612	0.057	25.85
M83798/3-4	7/16-20UNJF-3B	1.59	40.39	0.37	9.40	0.718	18.237	0.077	34.93
M83798/3-5	1/2-20UNJF-3B	1.68	42.67	0.38	9.65	0.844	21.438	0.098	44.45
M83798/3-6	9/16-18UNJF-3B	1.85	46.99	0.38	9.65	0.922	23.419	0.058	26.31
M83798/3-8	3/4-16UNJF-3B	2.01	51.05	0.44	11.18	0.938	23.825	0.089	40.37
M83798/3-10	7/8-14UNJF-3B	2.25	57.15	0.50	12.70	1.126	28.600	0.126	57.15
M83798/3-12	1-1/16-12UNJ-3B	2.66	67.56	0.57	14.48	1.376	34.950	0.195	88.45
M83798/3-16	1-5/16-12UNJ-3B	2.97	75.44	0.63	16.00	1.500	38.100	0.313	141.97
M83798/3-20	1-5/8-12UNJ-3B	3.38	85.85	0.64	16.26	1.782	45.263	0.536	243.13
M83798/3-24	1-7/8-12UNJ-3B	3.62	91.95	0.77	19.56	2.032	51.613	0.697	316.15
M83798/3-32	2-1/2-12UNJ-3B	4.22	107.19	0.92	23.37	2.532	64.313	1.216	551.57

NOTES:

1. Material: Aluminum, Per QQ-A-225/6, either SAE 2024-T6 or SAE 2024-T851; or Per QQ-A-225/8, either SAE 6061-T6 or SAE 6061-T651. Nipple and Nut: Sizes -3, -4 and -5, carbon steel, SAE 1137, SAE 11L37 or SAE 1141 Per QQ-S-637 Size -6 and above, aluminum, Per QQ-A-225/8 or WW-T-700/6, SAE 6061-T6; or Per QQ-A-225/6, SAE 2024-T6 or SAE 2024-T851.
   Wire (Swivel Nut to Nipple): Sizes -3, -4 and -5, corrosion-resistant steel, class 305, condition A Per QQ-S-763 or composition 304, condition A Per QQ-W-423. Size -6 and above, aluminum, SAE 2024-T4 Per QQ-A-225/6.
2. Swivel nut and seat of nipple shall mate with MS33656.
3. If required, lockwire holes to be drilled in accordance with AS1043 and suffix "L" added to part number. Example: M83798/3-10L.
4. *This specification sheet takes precedence over documents referenced herein.*
5. Referenced documents shall be of the issue in effect on the date of invitation for bid.
6. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians:
Air Force - 99
Army - AV

Review Activities:
Army - AT, ME
Navy - AS
DSA - CS

User Activities:
Air Force - 11
Army - AV
Navy - AS

Preparing Activity:
Air Force - 99

Agent:
DSA - CS

(Project 4730-0584)

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:43Z
Check the source to verify that this is the current version before use.