MIL-F-83798/5A
12 January 1977


SUPERSEDING
MIL-F-83798/5
1 AUGUST 1974

MILITARY SPECIFICATION SHEET

FITTINGS, RUBBER HOSE, LIGHTWEIGHT, MEDIUM PRESSURE, FLARELESS, SWIVEL NUT, 45 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fittings described herein shall consist of this document and the latest issue of specification MIL-F-83798

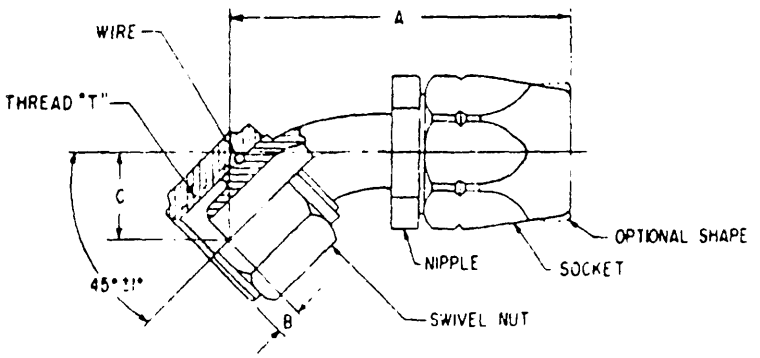

PART NUMBER	THREAD "T"	A MAX		B		C		WEIGHT MAX	
		IN	MM	IN ±.03	MM ±0.76	IN ±0.032	MM ±0.813	LBS	GMS
M83798/5-3	3/8 24UNJF 3B	1.71	43.43	0.14	3.56	0.385	9.78	0.045	20.41
M83798/5-4	7/16 20UNJF 3B	1.82	46.23	0.22	5.59	0.440	11.430	0.073	33.11
M83798/5-5	1/2 20UNJF 3B	1.90	48.26	0.22	5.59	0.525	13.335	0.095	43.09
M83798/5-6	9/16 18UNJF 3B	2.13	54.10	0.20	5.08	0.578	14.681	0.055	24.95
M83798/5-8	3/4 16UNJF 3B	2.36	59.94	0.21	5.33	0.610	15.494	0.086	39.92
M83798/5-10	7/8 14UNJF 3B	2.61	66.29	0.24	6.10	0.725	18.415	0.125	56.70
M83798/5-12	1 1/16 12UNJ 3B	2.97	75.44	0.32	8.13	0.800	20.320	0.197	89.36
M83798/5-16	1 5/16 12UNJ 3B	3.25	82.55	0.33	8.38	0.854	21.692	0.302	136.98
M83798/5-20	1 5/8 12UNJ 3B	3.65	92.71	0.37	9.40	0.962	24.435	0.531	240.86
M83798/5-24	1 7/8 12UNJ 3B	3.98	101.09	0.34	8.64	1.155	29.337	0.693	314.34
M83798/5-32	2 1/2 12UNJ 3B	4.45	113.03	0.37	9.40	1.410	35.814	1.225	555.65

NOTES:

1. Material: Socket: Aluminum, Per QQ-A-225/6, either SAE 2024-T6 or SAE 2024-T851, or Per QQ-A-225/8, either SAE 6061-T6 or SAE 6061-T651. Nipple and Nut: Sizes -3, -4 and -5, carbon steel, SAE 1137, SAE 1137 or SAE 1141 Per QQ-S-637. Size -6 and above, aluminum, Per QQ-A-225/8 or WW-T-700/6, SAE 6061-T6, or Per QQ-A-225/6, SAE 2024-T6 or SAE 2024-T851.
   Wire (Swivel Nut to Nipple): Sizes -3, -4 and -5, corrosion-resistant steel, class 305, condition A Per QQ-S-763 or composition 304, condition A Per QQ-W-423. Size -6 and above, aluminum, SAE 2024-T4 Per QQ-A-225/6.
2. Swivel nut and seat of nipple shall mate with MS33514.
3. If required, lockwire holes to be drilled in accordance with AS1043 and suffix "L" added to part number. Example: M83798/5-10L
4. This specification sheet takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on the date of invitation for bid.
6. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians
Air Force - 99
Army - AV

Review Activities
Army - AT, ME
Navy - AS
DSA - CS

User Activities
Air Force - 11
Army - AV
Navy - AS

Preparing Activity
Air Force - 99

Agent
DSA - CS

(Project 4730-0586)

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:44Z
Check the source to verify that this is the current version before use.