INCH-POUND

MIL-DTL-83798/5C
27 April 2002
SUPERSEDING
MIL-F-83798/5A
12 January 1977
MIL-DTL-83798/5B
18 September 2000

DETAIL SPECIFICATION SHEET

FITTINGS, RUBBER HOSE, LIGHTWEIGHT, MEDIUM PRESSURE, FLARELESS, SWIVEL NUT, 45 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-83798 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

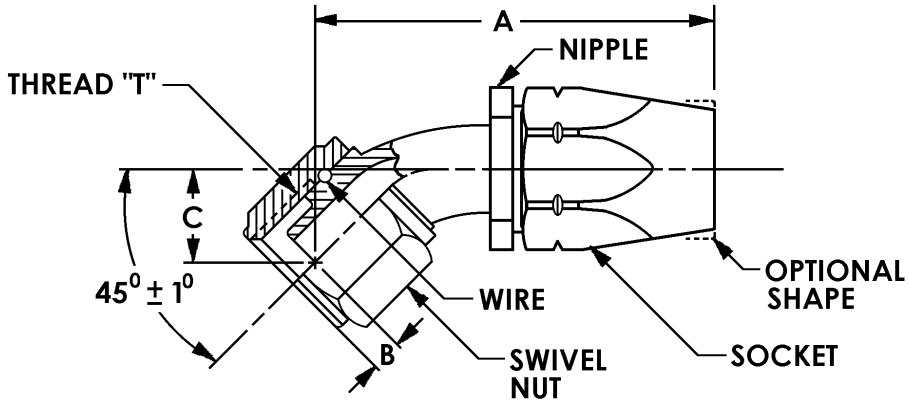

NOTES:

1. See table I for fitting dimensions, weight, and thread size.

FIGURE 1. Fitting, flareless, swivel nut, 45 degrees.

Distribution Statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:43Z
Check the source to verify that this is the current version before use.

TABLE I. Fitting, dimensions, weight, and thread size.

Dash Number	Thread "T"	A (max)		B		C		Weight (max)	
		in.	mm	in. ±0.03	mm ±0.76	in. ±0.035	mm ±0.883	lbs.	gms.
-3	3/8-24UNJF-3B	1.71	43.43	0.14	3.66	0.480	12.192	0.050	22.68
-4	7/16-20UNJF-3B	1.82	46.23	0.22	5.59	0.450	11.430	0.074	33.57
-5	1/2-20UNJF-3B	1.90	48.26	0.22	5.59	0.525	13.335	0.095	43.09
-6	9/16-18UNJF-3B	2.13	54.10	0.20	5.08	0.578	14.681	0.055	24.95
-8	3/4-16UNJF-3B	2.36	59.94	0.21	5.33	0.610	15.494	0.088	39.92
-10	7/8-14UNJF-3B	2.61	66.29	0.24	6.10	0.725	18.415	0.125	56.70
-12	1-1/16-12UNJ-3B	2.97	75.44	0.32	8.13	0.800	20.320	0.197	89.36
-16	1-5/16-12UNJ-3B	3.25	82.55	0.33	8.38	0.854	21.692	0.302	136.98
-20	1-5/8-12UNJ-3B	3.65	92.71	0.37	9.40	0.962	24.435	0.531	240.86
-24	1-7/8-12UNJ-3B	3.98	101.09	0.34	8.64	1.155	29.337	0.693	314.34
-32	2-1/2-12UNJ-3B	4.45	113.03	0.37	9.40	1.410	35.814	1.225	555.65

REQUIREMENTS:

1. Material: Socket: Aluminum per SAE AMS-QQ-A-225/6 (2024-T6) or SAE AMS4339 (2024-T851) or aluminum per SAE AMS-QQ-A-225/8 (6061-T6) or SAE AMS4117 (6061-T651).

2. Nipple and Nut: Sizes -3, -4, and -5, chrome-molybdenum steel (4130) per SAE AMS-6370 or SAE AMS-S-6758; size -6 and above, aluminum per SAE AMS-QQ-A-225/6 (2024-T6) or SAE AMS4339 (2024-T851) or aluminum (6061-T6) per SAE AMS-QQ-A-225/8 or WW-T-700/6.

3. Wire, Swivel Nut to Nipple: Sizes -3, -4, and -5, corrosion-resistant steel per SAE AMS-QQ-S-763 (class 305, condition A) or ASTM A580 (composition 304, condition A); size -6 and above, aluminum per SAE AMS-QQ-A-225/6 (2024-T4).

4. Swivel nut and seat of nipple shall mate with SAE AS33514.

5. If required, lockwire holes to be drilled in accordance with SAE AS1043 and suffix "L" added to part number.

6. This specification sheet takes precedence over documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:43Z
Check the source to verify that this is the current version before use.

7. The Part Identifying Number (PIN) shall be constructed as follows:

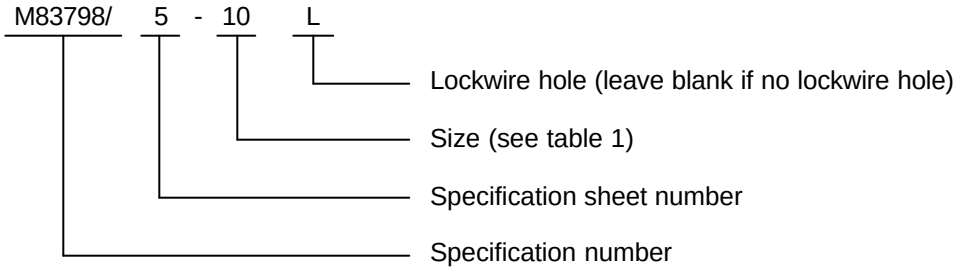

M83798/5-10L indicates: 7/8″ fitting, flareless, swivel nut, 45 degrees, with lockwire hole.

Custodians:
Army - AV
Air Force - 99
Navy - AS
DLA - CC

Review activities:
Army – AT
Air Force - 11
Navy - SA

Preparing activity:
DLA - CC

(Project 4730-2273)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:43Z
Check the source to verify that this is the current version before use.