
MIL-F-83798/6A
12 January 1977
SUPERSEDING
MIL-F-83798/6
1 AUGUST 1974

MILITARY SPECIFICATION SHEET

FITTINGS, RUBBER HOSE, LIGHTWEIGHT, MEDIUM PRESSURE, FLARELESS, SWIVEL NUT, 90 DEGREES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the fittings described herein shall consist of this document and the latest issue of specification MIL-F-83798.

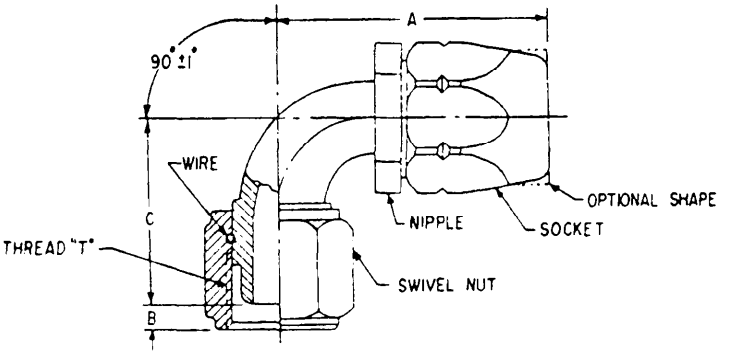

PART NUMBER	THREAD "T"	A MAX		B		C		WEIGHT MAX	
		IN	MM	IN ±.093	MM ±0.76	IN ±0.035	MM ±0.889	LBS	GMS
M83798/6-3	3/8-24UNJF-3B	1.58	40.13	0.14	3.56	0.867	22.022	0.050	22.68
M83798/6-4	7/16-20UNJF-3B	1.60	40.64	0.22	5.59	0.860	21.844	0.077	34.93
M83798/6-5	1/2-20UNJF-3B	1.68	42.67	0.22	5.59	1.000	25.400	0.100	45.36
M83798/6-6	9/16-18UNJF-3B	1.85	46.99	0.20	5.08	1.112	28.245	0.060	27.22
M83798/6-8	3/4-16UNJF-3B	2.01	51.05	0.21	5.33	1.156	29.362	0.092	41.73
M83798/6-10	7/8-14UNJF-3B	2.25	57.15	0.24	6.10	1.392	35.357	0.130	58.97
M83798/6-12	1-1/16-12UNJ-3B	2.66	67.56	0.32	8.13	1.626	41.300	0.202	91.63
M83798/6-16	1-5/16-12UNJ-3B	2.97	75.44	0.33	8.38	1.776	45.110	0.320	145.15
M83798/6-20	1-5/8-12UNJ-3B	3.38	85.85	0.37	9.40	2.056	52.222	0.556	252.20
M83798/6-24	1-7/8-12UNJ-3B	3.77	95.76	0.34	8.64	2.440	61.976	0.711	322.50
M83798/6-32	2-1/2-12UNJ-3B	4.06	103.12	0.37	9.40	3.020	76.708	1.296	587.86

NOTES:

1. Material: Aluminum, Per QQ-A-225/6, either SAE 2024-T6 or SAE 2024-T851; or Per QQ-A-225/8, either SAE 6061 - T6 or SAE 6061 - T651 *Nipple and Nut:* Sizes -3, -4 and -5, carbon steel, SAE 1137, SAE 11L37 or SAE 1141 Per QQ-S-637. Size -6 and above, aluminum, Per QQ-A-225/8 or WW-T-700/6, SAE 6061 - T6; or Per QQ-A-225/6, SAE 2024-T6 or SAE 2024-T851. Wire (Swivel Nut to Nipple): Sizes -3, -4 and -5, corrosion-resistant steel, class 305, condition A Per QQ-S-763 or composition 304, condition A Per QQ-W-423. Size -6 and above, aluminum, SAE 2024-T4 Per QQ-A-225/6.
2. Swivel nut and seat of nipple shall mate with MS33514.
3. If required, lockwire holes to be drilled in accordance with AS1043 and suffix "L" added to part number. Example: M83798/6-10L.
4. This specification sheet takes precedence over documents referenced herein.
5. Referenced documents shall be of the issue in effect on the date of invitation for bid.
6. Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodians
Air Force - 99
Army - AV

Review Activities
Army - AT, ME
Navy - AS
DSA - CS

User Activities
Air Force - 11
Army - AV
Navy - AS

Preparing Activity:
Air Force - 99

Agent:
DSA - CS

(Project 4730-0587)

FSC 4730

Source: https://assist.dla.mil -- Downloaded: 202610-23T09:44Z
Check the source to verify that this is the current version before use.