
INCH-POUND
MIL-PRF-32271/2A
03 JUNE 2025
SUPERSEDING
MIL-PRF-32271/2
30 OCTOBER 2008

PERFORMANCE SPECIFICATION SHEET

BATTERY, NON-RECHARGEABLE, LITHIUM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product herein shall consist of this specification and MIL-PRF-32271.

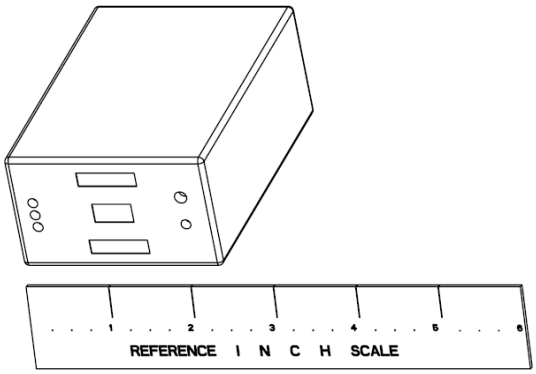

See NOTES for nominal dimensions; see applicable drawing for dimensional requirements.

FIGURE 1. General view, M32271/2 battery shape

For clarity, MIL-PRF-32271 tables are labeled with capital Roman numerals (e.g. IX) and MIL-PRF-32271/2A tables are labeled with lower case Roman numerals (e.g. ix).

REQUIREMENTS (see 1.2 for Type, Class, and Features descriptions):

Type	I	
Class	2	
Features	C	E
PIN	M32271/2-12C	M32271/2-12E

Distribution Statement A. Approved for public release: distribution is unlimited.
Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:35Z
Check the source to verify that this is the current version before use.

Specification requirements: The following requirements of MIL-PRF-32271, identified therein as "when specified," are applicable as indicated below:

TABLE i. *"When specified" requirements*

Requirement	Requirement Paragraph	Verification Paragraph	Applicability by PIN Suffix (M32271/2-)	
			12C	12E
Parallel discharges	*Tables II, III, IV, IX, X, XI, & XII*		*No*	*No*
Additional material requirements	*3.3.5*	*4.6.1.11*	*No*	*No*
Parallel cell arrangements[1]	3.4		Yes	Yes
Connectors	3.4.5	4.6.1.7	Yes	Yes
Battery charger connection	*3.4.5.1*	*4.6.1.7.1*	*No*	*No*
Connection integrity	*3.4.5.2*			
Static	*3.4.5.2*	*4.6.1.7.2*	*No*	*No*
Dynamic	*3.4.5.2*	*4.6.1.7.3*	*No*	*No*
Terminal integrity	3.4.6			
Socket Strength	*3.4.6.1*	*4.6.1.8.1*	*No*	*No*
Terminal Strength	3.4.6.2	4.6.1.8.2	Yes	Yes
Complete discharge device	3.4.7	4.6.1.9	Yes	Yes
State of charge device	3.4.8	4.6.1.10	*No*	Yes
State of charge data output	3.4.8e	4.6.1.10	*No*	Yes
Additional design and construction requirements	*3.4.11*	*4.6.1.12*	*No*	*No*
Cell charging	3.5.3	4.6.2.3	Yes	Yes
Nail penetration	3.5.4	4.6.2.4	Yes	Yes
Parallel string charge protection[2]	3.5.6	4.6.2.6	Yes	Yes
Cell series string short circuit	*3.5.7*	*4.6.2.7*	*No*	*No*
Battery charge protection	3.5.12	4.6.2.12	Yes	Yes
Over-current protection	3.5.14.1	4.6.2.14	Yes	Yes
Over-temperature protection	3.5.15	4.6.2.15	Yes	Yes
Projectile	3.5.16	4.6.2.17	Yes	Yes
Additional safety requirements	3.5.18	4.6.2.18	*No*	*No*
Capacity LR	*3.6*	*4.6.4.1.5*	*No*	*No*
Capacity LRT	*3.6*	*4.6.4.1.9*	*No*	*No*
Capacity IDC	*3.6*	*4.6.4.1.10*	*No*	*No*
Surface temperature	3.6h	4.6.4.1	Yes	Yes
Immersion	3.7.8	4.6.5.8	Yes	Yes
Watertight integrity	*3.7.9*			
Shallow	*3.7.9*	*4.6.5.9*	*No*	*No*
Deep	*3.7.9*	*4.6.5.10*	*No*	*No*
Electromagnetic interference	*3.7.10*	*4.6.5.11*	*No*	*No*
Electrostatic discharge	*3.7.11*	*4.6.5.12*	*No*	*No*
Additional environmental requirements	*3.7.12*	*4.6.5.13*	*No*	*No*

[1] Parallel cell arrangements are permitted but are not required.
[2] Only required if parallel cell arrangements are used.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:35Z
Check the source to verify that this is the current version before use.

TABLE i. *"When specified" requirements* – Continued

Requirement	Requirement Paragraph	Verification Paragraph	Applicability by PIN Suffix (M32271/2-)	
			12C	12E
DO NOT CHARGE! marking	3.8.1.2b		Yes	Yes
Complete discharge device marking/label	3.8.4		Yes	Yes
State of charge marking	3.8.5		*No*	Yes
Simplified battery label	3.8.7		Yes	Yes
Additional markings	*3.8.8*		*No*	*No*

Dimensions, marking and configuration, Type I

Battery - Drawing A3315879
Battery Connector (3.4.5 & 4.6.1.7) – Drawing A3315879
Mating Connector (3.4.5 & 4.6.1.7) – Drawing A3315879
Battery Charger Connector (3.4.5.1 & 4.6.1.7.1) – Not Applicable
Simplified Battery Label (3.8.7) – The energy shall be calculated using the I test data

Battery voltages (3.4.4 & 4.6.1.5), Type I:

Battery open-circuit voltage (3.4.4.1 & 4.6.1.5.1):

Maximum – 6.6 volts
Minimum – 6.0 volts

Battery closed circuit voltage (3.4.4.2 & 4.6.1.5.2):

For capacity, initial voltage delay, and closed circuit voltage test:
Minimum – 4.0 volts

Cell closed circuit voltage test (3.4.4.3 & 4.6.1.3):

Minimum - 2.0 volts per cell

Maximum weight (3.1 & 4.6.1.6):

Type I - 0.86 lbs. (390 g)

Capacity test requirements (3.6 & 4.6.4), Type I:

Test	Initial voltage delay Time (MAX)	to Volts	Minimum Capacity		Cut-off Volts
				Storage Period	
			1-Week	4-Week	
I	1 second	4.0	4.8 hours		4.0
L	1 second	4.0	4.0 hours		4.0
H	1 second	4.0	4.0 hours		4.0
IT	1 second	4.0	4.4 hours	4.3 hours	4.0
LT	1 second	4.0	3.7 hours	3.6 hours	4.0
HT	1 second	4.0	3.7 hours	3.6 hours	4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:35Z
Check the source to verify that this is the current version before use.

Abuse test pulse discharge capacity requirement (3.5.13 & 4.6.2.13l):

Type I – 9.4 ampere- hours

METHODS OF EXAMINATION AND TEST:

Cell closed-circuit voltage test: When cells are tested as specified in 4.6.1.3, load each cell to be used in a single series cell string design with 2 amperes constant current, 1 ohm constant resistance, or 4 watts constant power. In the event that parallel cell arrangements are used, use a load that produces a current equivalent to 2 amperes divided by the number of parallel cell strings to be used, as a minimum.

Battery closed-circuit voltage test: When tested as specified in 4.6.1.5.2, load each battery with 2 ohms constant resistance, 2 amperes constant current, or 8 watts constant power.

Abuse test, pre-discharge: When tested as specified in 4.6.2.13a, discharge Type I batteries with a load of 7 watts for 2.1 hours.

Abuse test, pulse discharge: When tested as specified in 4.6.2.13l, discharge with a load of 3.0 amperes for 1 minute followed by 2.1 amperes for 4 minutes, cycled continuously to 4.0 volts.

Battery over-current protection: When tested as specified in 4.6.2.14, load batteries with either 4 amperes or 20 watts.

Immersion: When tested as specified in 4.6.5.8, a load of 5.0 watts shall be applied during the storage and immersion time periods specified.

Capacity tests (4.6.4):

Test	Discharge Rate		Duty Cycle
	2 min.	Then	
I	9.0W	6.5W	Continuous discharge to cut-off volts, followed by 2.0 amperes To zero volts, then 2.0 amperes forced discharge for 5 minutes.
L	8.0W	5.0W	Continuous discharge to cut-off voltage
H	12.0W	9.0W	Continuous discharge to cut-off voltage
IT	9.0W	6.5W	Continuous discharge to cut-off voltage
LT	8.0W	5.0W	Continuous discharge to cut-off voltage
HT	12.0W	9.0W	Continuous discharge to cut-off voltage

Discharge Cycle: For each test, the first discharge rate shall be applied for 2 minutes; the load shall then switch to the second discharge rate, which shall be applied to cut-off voltage.

NOTES:

(This section contains information of a general nature which may be helpful, but is not mandatory)

Intended use: This specification covers non-rechargeable lithium batteries of the non-reserve type composed of electrochemical cells using lithium metal in the anode. They are intended for use in military communications and electronics equipment.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:35Z
Check the source to verify that this is the current version before use.

Nominal ratings[3]: The following are the nominal ratings for the battery described by this specification sheet. They are provided for information purposes.

Battery PIN:	**M32271/2-12C or -12E (Li/MnO_2)**
Overall Dimensions:	3.75 in H x 2.55 in W x 1.50 in D
MAX Weight:	0.86 lb (390 g)
Voltage Range:	4.0-6.6 Volts
Nominal Capacity (Ampere-hours):	10 Amp-hours
Nominal Energy (Watt-hours):	42 Watt-hours
MAX Rated Power Output:	15 Watts
MAX Continuous Load Rating:	2.0 Amps
MAX Pulse Rating:	3.0 Amps
Instantaneous Trip Rating:	4.0 Amps
Operating Temperature Range:	-4 to 130ºF (-20 to 55ºC)
Storage Temperature Range:	-40 to 160ºF (-40 to 71ºC)
MAX Abusive Temperature (non-operating):	195ºF (91ºC)

Other data:

Military Type Designations. The military type designations that relate to the PINs covered by this specification sheet are as follows: The BA-5347()/U designation has been used for the Type I PIN; and the BA-7847()/U designation was used once for prototypes of the Type III PIN. Please note that the Type II BA-5847/U designation has been replaced by the BA-5347()/U.

Both battery types covered by this specification sheet are subject to the transportation requirements of 49 CFR 173.185. They have solid cathodes and more than 2.0 grams of lithium content. See applicable Safety Data Sheet (SDS) for the maximum lithium weight per cell and battery. It should be noted that all non-rechargeable lithium batteries are restricted from shipment as cargo aboard passenger aircraft within, entering, or leaving the US.

Both battery types covered by this specification sheet include a complete discharge device in order to render the battery non-reactive after use. If the battery is damaged, or if the device does not operate as indicated by an amber or yellow light, the battery is considered reactive waste. Both battery types may be recycled after use. Universal waste rules, where applicable, apply only when recycling is the chosen disposal method.

The US Army CECOM Life Cycle Management Command (LCMC) publishes guidelines for the design of battery compartments for devices using the Type I battery covered by this specification sheet: Technical Bulletin 43-6135. Please contact the CECOM LCMC Directorate for Safety at usarmy.APG.cecom.mbx.amsel-sf-sec-cecom-lcmc--ds@army.mil for further information.

[3] Capacity and energy delivered by a battery are significantly affected by usage conditions, such as temperature and loads applied. If you have any questions about use of this battery in a particular device or circumstance, please visit the following web site (contact info is posted): https://battery.army.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:35Z
Check the source to verify that this is the current version before use.

Navy safety tests of NAVSEA S9310-AQ-SAF-010 are required for this battery during first article testing. The test data provided from the testing will be used to evaluate applications for specific using devices and Navy platforms. Devices using a battery described by this specification sheet will require US Navy Safety Approval prior to use by Department of Navy users unless such approval has already been granted. Please consult with NAVSEA Instruction 9310.1 for further information.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Custodians:
Army – CR
Navy – SH
Air Force – 99
DLA – GS

Review activities:
Navy – AS
Air Force – 71

Preparing activity:
Army – CR
(Project Number 6135-2025-003)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil or https://quicksearch.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T05:35Z
Check the source to verify that this is the current version before use.