JAN–I–8
AMENDMENT—2

21 JULY 1954

SUPERSEDING
AMENDMENT—1
31 July 1947

JOINT ARMY-NAVY SPECIFICATION

INSULATORS, STEATITE, RADIO

This amendment forms a part of Joint Army-Navy Specification JAN–I–8, 29 April 1944, and has been approved by the Department of Defense for use of the Departments of the Army, the Navy, and the Air Force.

Page 1, Section A: Delete, including footnote, and substitute:

"A. APPLICABLE SPECIFICATIONS AND OTHER PUBLICATIONS

"A–1. *Specifications.*—The following specifications, of the issue in effect on date of invitation for bids, form a part of this specification:

FEDERAL SPECIFICATIONS

NN–B–591—Boxes, Fiberboard, Wood-Cleated (for Domestic Shipment).
NN–B–621—Boxes, Wood, Nailed and Lock-Corner.
NN–B–631—Boxes; Wood, Wirebound (for Domestic Shipment).
LLL–B–631—Boxes; Fiber Corrugated (for Domestic Shipment).
LLL–B–636—Boxes, Fiber, Solid (for Domestic Shipment).
PPP–B–601—Boxes, Wood, Cleated-Plywood.

MILITARY SPECIFICATIONS

MIL–C–5—Capacitors, Fixed, Mica-Dielectric.
JAN–I–10—Insulating Materials, Ceramic Radio, Class L.
JAN–P–103—Packaging and Packing for Overseas Shipment—Boxes; Wood Cleated; Solid Fiberboard.
JAN–P–106—Packaging and Packing for Overseas Shipment—Boxes; Wood, Nailed.
MIL–B–107—Boxes, Wood, Wirebound (Overseas Type).
JAN–P–108—Packaging and Packing for Overseas Shipment—Boxes, Fiberboard (V-Board and W-Board), Exterior and Interior.

Source: https://assist.dla.mil -- Dow
Check the source to verify that this is

MIL–P–116—Preservation, Methods of.
MIL–B–10377—Box, Wood, Cleated, Veneer, Paper Overlaid.
MIL–L–10547—Liners, Case, Waterproof.

"**A–2.** *Other publications.*—The following publications, of the issue in effect on date of invitation for bids, form a part of this specification:

MILITARY STANDARD

MIL–STD–129—Marking of Shipments

NATIONAL BUREAU OF STANDARDS PUBLICATION

Handbook H28—Screw-Thread Standards for Federal Services

CONSOLIDATED CLASSIFICATION COMMITTEE PUBLICATION

Consolidated Freight Classification Rules."

Page 1, paragraph B–1, line 2: Delete "13" and substitute "14".

Page 5, paragraph E–5b (4), second sentence: Delete and substitute "Where the diameter is greater than 1 inch, ±(1 percent of the diameter involved ±0.010 inch) will be permitted."

Page 7: Following paragraph E–5b (7), add new paragraph:

"**E–5b (7) a.** *Alinement.*—Unless otherwise specified, holes shall be perpendicular to the axis or ends of the insulator as applicable, and shall not vary by more than 2° from this perpendicular."

Page 7, paragraph E–5c: Delete and substitute:

"**E–5c.** *Tapped holes.*—When checked as described in paragraph F–5b, tapped holes shall be within the limits shown in Table III and may not be countersunk more than the depth of one thread."

Page 7: Following paragraph E–5c, add new paragraph:

"**E–5d.** *Screw threads.*—Insulators up to 1.500 inches in length shall have a minimum of six usable threads. Insulators 1.500 inches or over shall have a minimum of nine usable threads."

Page 8, paragraph F–4, third sentence: Delete and substitute "All tests except visual inspection shall be made only when specified on the applicable figure or in the contract or order. (See par. H–2.)"

Page 9, Table II: Add "D–2" to first line of "Test requirements."

Page 10, paragraph F–5, line 2: Delete "(see pars. D–3, E–5, and E–11)" and substitute "(see pars D–2, D–3, E–1, E–3, E–4, E–5, and E–11)."

Page 10, paragraph F–5c, line 3: Delete "(Handbook H28)" and substitute "(Handbook H28—Table 16 and table 24, respectively)."

Source: https://assist.dla.mil -- Do
Check the source to verify that this i

Page 11, paragraph F–9: At beginning of paragraph, insert "Metal parts of."

Pages 11 to 13, inclusive, Section G: Delete and substitute:

"G. PACKAGING, PACKING, AND MARKING FOR SHIPMENT

"G–1. *Preservation and packaging (see par. H–2).*

"G–1a. *For domestic shipment (immediate use without storage).*—Insulators shall be afforded preservation and packaging in accordance with the manufacturer's replacement-parts practice.

"G–1b. *For domestic shipment (involving storage) or for overseas shipment.*—Insulators shall be cushioned and unit-packaged in accordance with method III of Specification MIL–P–116. The quantity to be included in a unit package shall be as specified. (See par. H–2.)

"G–2. *Packing (see par. H–2).*

"G–2a. *For domestic shipment (immediate use without storage).*—Insulators packaged as specified in paragraph G–1a shall be packed in containers of the type, size, and kind commonly used for the purpose, in a manner that will insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Consolidated Freight Classification Rules, or regulations of other carriers as applicable to the mode of transportation.

"G–2b. *For domestic shipment and storage.*—Insulators packaged as specified in paragraph G–1b shall be packed in wood-cleated fiberboard, nailed wood, wirebound wood, corrugated or solid fiberboard, cleated plywood, or cleated wood boxes conforming to Specifications NN–B–591, NN–B–621, NN–B–631, LLL–B–631, LLL–B–636, PPP–B–601, and MIL–B–10377, respectively. Closures shall be made in accordance with the applicable box specification. Fiberboard boxes shall conform to the special requirements of the applicable box specification. Fiberboard having a minimum dry bursting strength (Mullen test) of less than 275 pounds shall not be used. The gross weight of wood boxes shall not exceed 200 pounds; fiberboard boxes shall not exceed the weight limitations of the applicable box specification.

"G–2c. *For overseas shipment.*—Insulators packaged as specified in paragraph G–1b shall be packed in wood-cleated fiberboard, nailed wood, wirebound wood, corrugated or solid fiberboard, cleated wood, or cleated plywood boxes conforming to Specifications JAN–P–103, JAN–P–106, MIL–B–107, JAN–P–108, MIL–B–10377, and PPP–B–601, respectively. Shipping containers,

Source: https://assist.dla.mil -- Dow
Check the source to verify that this is

other than those conforming to Specification JAN–P–108, shall have case liners conforming to Specification MIL–L–10547 and appendix thereto. Box closures shall be as specified in the appendix of the applicable box specification. The gross weight shall not exceed 65 pounds for corrugated or solid fiberboard boxes and 150 pounds for all other boxes specified above.

"**G–3.** *Marking.*—In addition to any special marking required by the contract or order, unit packages and exterior shipping containers shall be marked in accordance with Standard MIL–STD–129. (See par. H–2.)"

Page 13, paragraph H–2, item (f): Delete and substitute:

"(f) Whether preservation, packaging, packing, and marking are for domestic shipment for immediate use, for domestic shipment involving storage, or for overseas shipment. (See sec. G.)"

Page 13, paragraph H–2: Following item (f), add:

"(g) Production-sampling tests required. (See par. F–4.)"

Page 13: Following paragraph H–2, add new paragraph:

"**H–2a.** *Indirect shipments.*—The packaging, packing, and marking requirements specified in Section G apply only to direct purchases by or direct shipment to the Government and are not intended to apply to contracts or orders between the manufacturer and prime contractor."

Page 14, paragraph H–6(a), lines 2 and 3: Delete "Joint Army-Navy Specifications JAN–I–10 and JAN–C–5" and substitute "Specifications JAN–I–10 and MIL–C–5".

Pages 14 and 16, paragraphs H–8 to H–10, inclusive: Delete and substitute:

"**H–8.** Copies of Handbook H28 may be obtained upon application, accompanied by money order, coupon, or cash, to the Superintendent of Documents, Government Printing Office, Washington 25, D. C.

"**H–9.** Copies of Consolidated Freight Classification Rules may be obtained upon application to the Consolidated Classification Committee, 202 Chicago Union Station, Chicago 6, Ill.

"**H–10.** Copies of Federal and Military specifications and Military standards required for Air Force purchases may be obtained upon application to the Commander, Wright Air Development Center, Wright-Patterson Air Force Base, Ohio. Both the title and identifying number or symbol should be stipulated when requesting copies.

"**H–11.** Copies of Federal and Military specifications and Military standards required for Army purchases may be obtained as


Source: https://assist.dla.mil -- Do
Check the source to verify that this i

indicated in the Department of the Army Index of Specifications and Standards'. Copies of the index may be obtained from the Superintendent of Documents, Government Printing Office, Washington 25, D. C. Services within the Department of the Army will obtain copies of the specifications and standards through established departmental channels. Both the title and identifying number or symbol should be stipulated when requesting copies.

"**H–12.** Copies of Federal and Military specifications and Military standards required for Navy purchases may be obtained upon application to the Bureau of Supplies and Accounts, Navy Department, Washington 25, D. C., except that Naval activities should make application to the Commanding Officer, Naval Supply Depot, Scotia 2, N. Y. Both the title and identifying number or symbol should be stipulated when requesting copies."

Source: https://assist.dla.mil -- Dow
Check the source to verify that this is

Page 17: After figure 6, add the following new figure 6a :

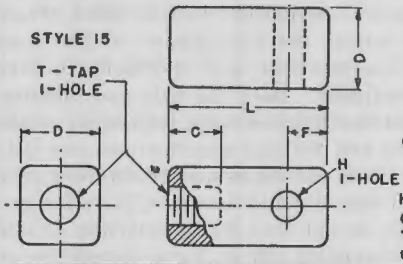

TYPE DESIGNATION TO BE IN THE FOLLOWING FORM:

NS 3 W 15 07

Component (D-3a) Grade (D-3b) Finish (D-3c) Style (D-3d) Part (D-3e)

Heavy lines indicate glaze when specified.
Countersink all tapped holes.
Tolerances on all dimensions shall be as specified herein, unless otherwise indicated.

Type designation†	Dimensions (inches)						Minimum usuable thread	Body of insulators of grades.		
								L-3	L-4	L-5§
	C	D	F	H	L	T		Available in finishes of-		
NS--1506	1/4	3/8	3/16	.150	.750	6/32	6	W	W	W
NS--1507	3/8	3/8	3/16	.170	.937	6/32	6	W		
NS--1508	3/8	3/8	3/16	.150	1.000	6/32	6	W	W	W
NS--1509	3/8	3/8	3/16	.187	1.187	6/32	6	W	W	W
NS--1510	3/8	3/8	1/4	.185	1.250	6/32	6			W
NS--1512	3/8	3/8	3/16	.150	1.500	6/32	9	W	W	
NS--1514	3/8	3/8	3/16	.150	1.750	6/32	9	W	W	W
NS--1516	3/8	3/8	3/16	.150	2.000	6/32	9	W	W	W
NS--1520	3/8	3/8	3/16	.150	2.500	6/32	9	W	W	W
NS--1524	3/8	3/8	3/16	.150	3.000	6/32	9	W	W	W
NS--1606	1/4	3/8	3/16	.169	.750	8/32	6	W	W	W
NS--1607	3/8	3/8	3/16	.150	.875	8/32	6	W	W	
NS--1608	3/8	3/8	3/16	.169	1.000	8/32	6	W	W	W
NS--1609	3/8	3/8	3/16	.187	1.187	8/32	6			W
NS--1610	7/16	3/8	3/16	.170	1.250	8/32	6	U	U	U
NS--1612	3/8	3/8	3/16	.169	1.500	8/32	9	W	W	W
NS--1613	3/8	3/8	3/16	.187	1.687	8/32	9	U	U	U
NS--1614	3/8	3/8	3/16	.169	1.750	8/32	9	W	W	W
NS--1616	3/8	3/8	3/16	.169	2.000	8/32	9	W	W	W
NS--1618	3/8	3/8	3/16	.150	2.250	8/32	9	W		
NS--1620	3/8	3/8	3/16	.169	2.500	8/32	9	W	W	W
NS--1624	3/8	3/8	3/16	.169	3.000	8/32	9	W	W	W
NS--1625	3/8	3/8	1/4	.150	3.125	8/32	9	W	W	W
NS--1650	3/8	1/2	1/4	.250	6.250	8/32	9	W	W	W
NS--1737	5/8	1/2	5/16	.250	4.625	10/24	9	W		
NS--1814	9/16	5/8	3/8	.312	1.750	1/4-20	9	W	W	W

† Complete type designation will include additional symbols as shown in sketch.

§ Finish and grade of material will be indicated by the symbols inserted for the hyphens (-). The basic style is given in the sketch. Insulators of the same basic design but with larger cross-sectional areas are indicated by the larger (succeeding) style numbers given in the tabulation. In the case of glazed insulators, the grade of combined body (basic ceramic body plus additional glaze) shall not be less than that of the unglazed body alone.

Figure 6a. Steatite radio insulators—square pillar insulators.

Source: https://assist.dla.mil -- Do
Check the source to verify that this i


Page 21, figure 8: Under "Dimension (inches)" change "L±1/64" to "L±1/32".

Page 24, figure 11: Change "L" dimension of "NS–5212" from "3½" to "2½".

Page 27, figure 13: Change "H" dimension of "NS–7680" from "17/64" to "13/64" and "J" dimension from "7/16" to "17/64".

Page 27, figure 13, second footnote, line 2: Delete "(JAN–C–5)" and substitute "(MIL–C–5)".

Page 27: After figure 13, add the following new figure 14 and patent notice:

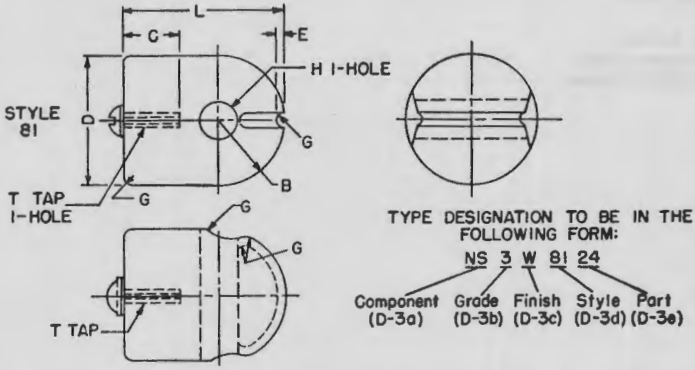

Tolerances on all dimensions shall be as specified herein, unless otherwise indicated

Glaze all over except base. Lockwasher, shakeproof, cadmium plated brass, or equal. Screw, cadmium plated brass.

Type † Designation	Dimensions (inches)								Minimum usable threads	Body of insulators of grades		
										L-3	L-4	L-5 §
	B	C	D	E	G	H	L	T		Available in finishes of-		
NS--8112	5/8	1/2	1.25	1/16	1/16	.375	1.50	10-24	6	U,B,W	U,B,W	U,B,W
NS--8124	5/8	5/8	1.25	1/16	1/16	.375	3.00	10-24	9	U,B,W	U,B,W	U,B,W

† Complete type designation will include additional symbols as shown in sketch.

§ Finish and grade of material will be indicated by the symbols inserted for the hyphens (--). The basic style is given in the sketch. Insulators of the same basic design but with larger cross-sectional areas are indicated by the larger (succeeding) style numbers given in the tabulation.

Figure 14. Steatite radio insulators.

Source: https://assist.dla.mil -- Dow
Check the source to verify that this is

"Notice.—When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto."

Custodians:
Army—Signal Corps
Navy—Bureau of Ships
Air Force

Other interest:
Army—CMOQ
Navy—*ACG*OrS.

Source: https://assist.dla.mil -- Do
Check the source to verify that this i