MIL-C-5/10G
5 August 1966
SUPERSEDING
MIL-C-5/10F
14 March 1962


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC,

STYLE CM60

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-5.

INCHES	MM
.003	.08
.010	.25
.02	.51
.03	.76
.25	6.35
.75	19.05
1.250	31.75
1.31	33.27
1.75	44.45

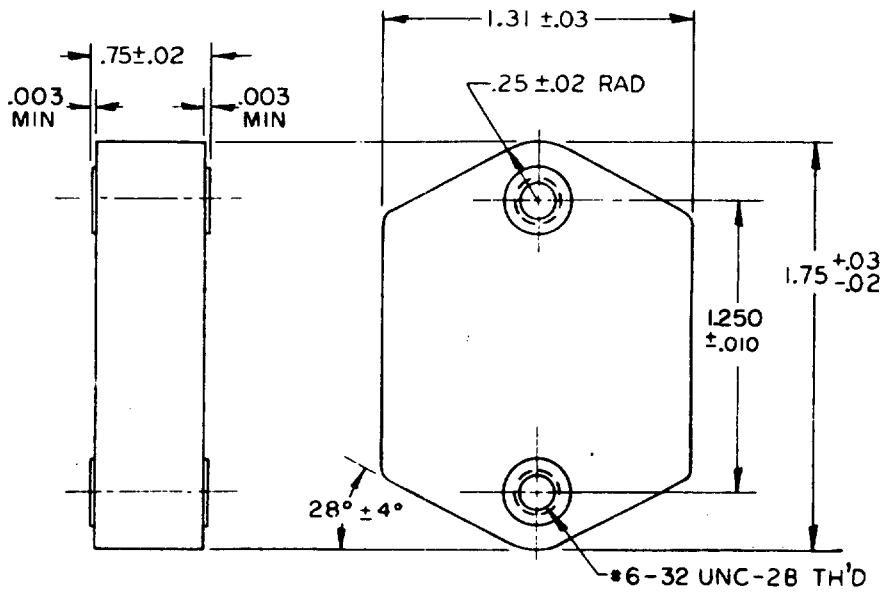

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch ≙ 25.4 mm.
3. Approximate weight 1.65 ounce.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:50Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure.

Capacitance value: See table I.

Capacitance tolerance: See table I.

DC rated voltage: See table I.

Operating temperature range: See table I.

Symbol	Temperature range
N	-55°C to +85°C
O	-55°C to +125°C
P	-55°C to +150°C

Vibration grade: 3 (10 to 2, 000 cps).

Characteristic:

Symbol	Temperature coefficient P/M/°C	Capacitance drift
B	Not specified	Not specified
C	-200 to +200	±(0.5 percent + 0.1 pf)
D	-100 tc +100	±(0.3 percent + 0.1 pf)
E	-20 to +100	±(0.1 percent + 0.1 pf)
F	0 to +70	±(0.05 percent + 0.1 pf)

Dielectric withstanding voltage:
Method 301 of MIL-STD-202:
200 percent of dc working voltage for not less than 1 second nor more than 5 seconds.

Barometric pressure:
Method 105 of MIL-STD-202:
Condition B (50, 000 ft).
Test potential - 150 percent of rated dc voltage for not less than 1 second nor more than 5 seconds.

Insulation resistance:
Method 302 of MIL-STD-202, condition A.
At 25°C - 10, 000 megohms, minimum.
At 85°C - 4, 000 megohms, minimum.
At 125°C - 1, 500 megohms, minimum.
At 150°C - 750 megohms, minimum.

Dissipation factor, maximum: See MIL-C-5.

Capacitance:
Method 305 of MIL-STD-202.

Vibration:
Method 204 of MIL-STD-202, condition D (20G).

Temperature cycling:
Method 102 of MIL-STD-202, condition D.

Immersion:
Method 104 of MIL-STD-202, condition B.
Dielectric withstanding voltage - Meet initial requirement.
Insulation resistance - 30 percent of initial requirement.
Dissipation factor - Not greater than 150 percent of initial value.
Capacitance change - Shall not exceed ±4 percent of nominal value or 1 pf, whichever is greater, for characteristics B and C; ±2 percent of nominal value or 1 pf, whichever is greater, for characteristics D, E, and F.

Shock (medium impact):
Method 205 of MIL-STD-202, condition C (50G).

Moisture resistance:
Method 106 of MIL-STD-202:
Dielectric withstanding voltage - Meet initial requirement.
Insulation resistance - At least 30 percent of initial requirement.
Dissipation factor - Not greater than 150 percent of initial value.
Capacitance change - Shall not exceed ±4 percent of nominal value or 1 pf, whichever is greater, for characteristics B and C; ±2 percent of nominal value or 1 pf, whichever is greater, for characteristics D, E, and F.

Temperature coefficient and capacitance drift:
Not specified.

Low temperature storage and life:
48 hours at $-55\ ^{+0}_{-2}$ °C, immediately followed by qualification or performance test, as applicable.
Qualification test - 2, 000 hours at the applicable high test temperature with 150 percent of dc working voltage applied.
Dielectric withstanding voltage - Initial requirements.
Insulation resistance - Initial requirements.
Dissipation factor - Not greater than 150 percent of initial value.
Capacitance change - Shall not exceed ±5 percent of nominal value or 1 pf, whichever is greater, for characteristics B and C; ±2 percent of nominal value or 1 pf, whichever is greater, for characteristics D, E, and F.
Performance check - Conditions and requirements in accordance with qualification test except test duration shall be 250 hours.
Continuation test - Units that have been subjected to the 250 hour test shall be continued for an additional 1, 750 hours and meet the requirements for the qualification test.

Qualification inspection:
Qualification inspection (Group C) is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:50Z
Check the source to verify that this is the current version before use.

TABLE I. Style CM60.

Type designation 1/	Capacitance value	DC voltage rating	Operating temperature range	Characteristics available at capacitance tolerance ±2% (G)	±5% (J)
CM60-K101--3	100	2500	N, O, P	EF	EF
CM60-K111--3	110	2500	N, O, P	EF	EF
CM60-K121--3	120	2500	N, O, P	EF	EF
CM60-K131--3	130	2500	N, O, P	EF	EF
CM60-K151--3	150	2500	N, O, P	EF	EF
CM60-K161--3	160	2500	N, O, P	EF	EF
CM60-K181--3	180	2500	N, O, P	EF	EF
CM60-K201--3	200	2500	N, O, P	EF	EF
CM60-K221--3	220	2500	N, O, P	EF	EF
CM60FK241--3	240	2500	N, O, P	EF	EF
CM60FK271--3	270	2500	N, O, P	EF	EF
CM60FK301--3	300	2500	N, O, P	EF	EF
CM60FK331--3	330	2500	N, O, P	F	F
CM60FK361--3	360	2500	N, O, P	F	F
CM60FK391--3	390	2500	N, O, P	F	F
CM60FK431--3	430	2500	N, O, P	F	F
CM60FK471--3	470	2500	N, O, P	F	F
CM60FK511--3	510	2500	N, O, P	F	F
CM60FK561--3	560	2500	N, O, P	F	F
CM60FK621--3	620	2500	N, O, P	F	F
CM60FK681--3	680	2500	N, O, P	F	F
CM60FK751--3	750	2500	N, O, P	F	F
CM60FK821--3	820	2500	N, O, P	F	F
CM60FK911--3	910	2500	N, O, P	F	F
CM60FK102--3	1000	2500	N, O, P	F	F
CM60FK112--3	1100	2500	N, O, P	F	F
CM60FK122--3	1200	2500	N, O, P	F	F
CM60FK132--3	1300	2500	N, O, P	F	F
CM60FK152--3	1500	2500	N, O, P	F	F
CM60FK162--3	1600	2500	N, O, P	F	F
CM60FK182--3	1800	2500	N, O, P	F	F
CM60FK202--3	2000	2500	N, O, P	F	F
CM60FK222--3	2200	2500	N, O, P	F	F
CM60FK242--3	2400	2500	N, O, P	F	F
CM60FK272--3	2700	2500	N, O, P	F	F
CM60FK302--3	3000	2500	N, O, P	F	F
CM60FK332--3	3300	2500	N, O, P	F	F
CM60FK362--3	3600	2500	N, O, P	F	F
CM60FK392--3	3900	2500	N, O, P	F	F
CM60FK432--3	4300	2500	N, O, P	F	F
CM60-K472--3	4700	2500	N, O, P	BDF	BDF
CM60-K512--3	5100	2500	N, O, P	BDF	BDF
CM60-K562--3	5600	2500	N, O, P	BDF	BDF
CM60-K622--3	6200	2500	N, O, P	BDF	BDF
CM60-K682--3	6800	2500	N, O, P	BDF	BDF
CM60-K752--3	7500	2500	N, O, P	BDF	BDF
CM60-K822--3	8200	2500	N, O, P	BDF	BDF
CM60-K912--3	9100	2500	N, O, P	BDF	BDF
CM60-K103--3	10000	2500	N, O, P	BDF	BDF
CM60-K113--3	11000	2500	N, O, P	BDF	BDF
CM60-K123--3	12000	2500	N, O, P	BDF	BDF
CM60-K133--3	13000	2500	N, O, P	BDF	BDF
CM60-K153--3	15000	2500	N, O, P	BDF	BDF
CM60-K163--3	16000	2500	N, O, P	BDF	BDF

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:50Z
Check the source to verify that this is the current version before use.

TABLE I. Style CM60. - Continued

Type designation 1/	Capacitance value	DC voltage rating	Operating temperature range	Characteristics available at capacitance tolerance ±2% (G)	±5% (J)
CM60-G183--3	18000	1200	N, O, P	BDF	BDF
CM60-G203--3	20000	1200	N, O, P	BDF	BDF
CM60-G223--3	22000	1200	N, O, P	BDF	BDF
CM60-G243--3	24000	1200	N, O, P	CE	CE
CM60-G273--3	27000	1200	N, O, P	CE	CE
CM60-G303--3	30000	1200	N, O, P	CE	CE
CM60-G333--3	33000	1200	N, O, P	CE	CE
CM60-E363--3	36000	600	N, O, P	CE	CE
CM60-E393--3	39000	600	N, O, P	CE	CE
CM60-E433--3	43000	600	N, O, P	CE	CE
CM60-E473--3	47000	600	N, O, P	CE	CE

1/ Complete type designation will include additional symbols to indicate characteristic, capacitance tolerance and temperature range.

Custodians:
Army - EL
Navy - SH
Air Force - 11

Review activities:
Army - EL
Navy - SH
Air Force - 11, 17, 85

User activities:
Army -
Navy -
Air Force - 14, 19

Preparing activity:
Air Force - 11

(Project 5910-0750)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:50Z
Check the source to verify that this is the current version before use.