
MIL-C-5/12F
11 September 1972
SUPERSEDING
MIL-C-5/12E
20 September 1966


MILITARY SPECIFICATION SHEET
CAPACITORS, FIXED, MICA DIELECTRIC, STYLES CM70, CM71, AND CM73 1/

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this document and the latest issue of Specification MIL-C-5.

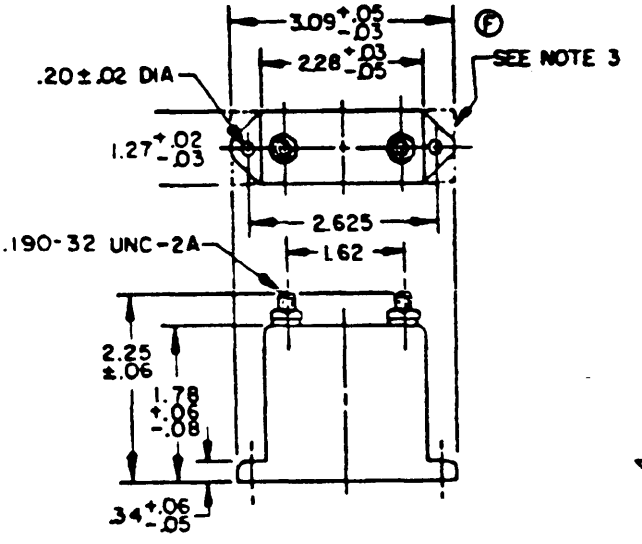

STYLE CM70

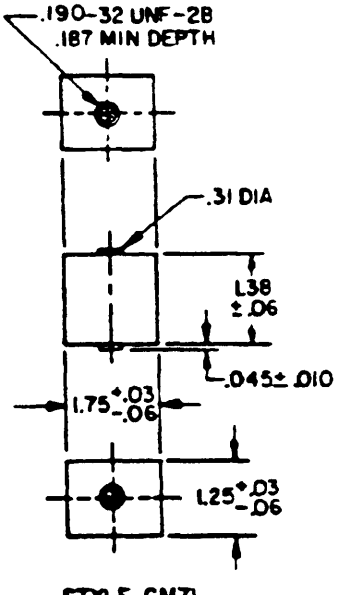


STYLE CM71


1/ CM72 deleted.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:51Z
Check the source to verify that this is the current version before use.

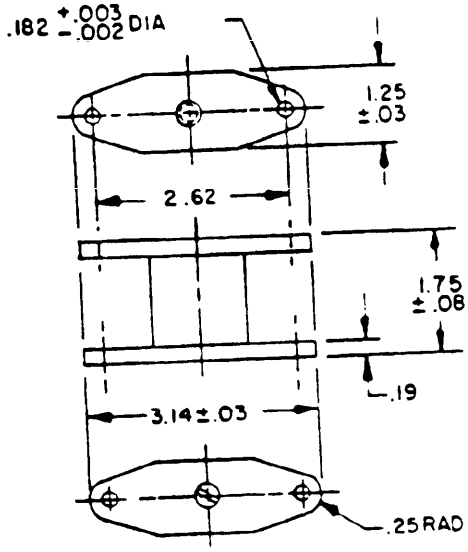

STYLE CM73

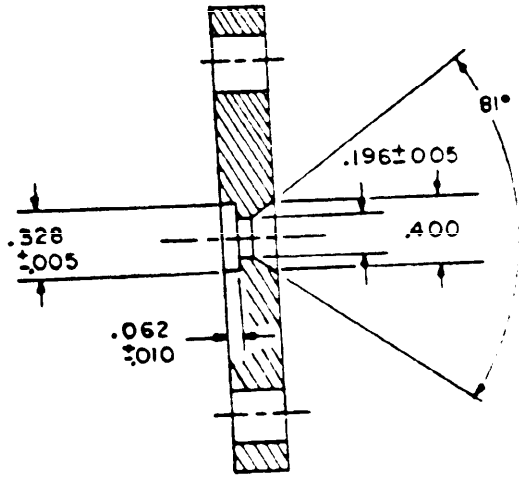

INCHES	MM
.002	.05
.003	.08
.005	.13
.010	.25
.02	.51
.03	.76
.045	1.14
.05	1.27
.06	1.52
.062	1.57
.08	2.03
.182	4.62
.187	4.75
.19	4.83
.190	4.83
.196	4.98
.20	5.08
.25	6.35
.31	7.87
.328	8.33
.34	8.64
.400	10.16
1.25	31.75
1.27	32.26
1.312	33.32
1.38	35.05
1.56	39.62
1.62	41.15
1.75	44.45
1.78	45.21
2.25	57.15
2.28	57.91
2.62	66.55
2.625	66.68
3.09	78.49
3.14	79.76

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Dotted shape of mounting feet optional.
4. Unless otherwise specified, tolerances are ±.005 (.13 mm) for three place decimals and .02(.51 mm) for two place decimals.
5. Brackets (flanges) shall be removable.
6. Hardware to be plated against corrosion.
7. Approximate weight CM70 is .41 lbs. (186.11 g).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure.

Material: Bracket (flange) aluminum per QQ-A-250/4 (T3-temper).

Construction: CM70 - Molded case.
CM71 and CM73 - Cast epoxy case.

Capacitance value: See table I.

Capacitance tolerance: ±2% (symbol G) and ±5% (symbol J).

Peak working voltage: See table I.

Operating temperature range:

Symbol	Temperature range
M	-55 to +70° C
O	-55 to +125° C

Vibration grade: Grade 1 (10-55 Hz).

Characteristic: See table I.

Symbol	Temperature coefficient P, M, °C	Capacitance drift
B	Not rated	Not rated
C	-200 to +200	±(0.5 percent +0.1 pF)
D	-100 to +100	±(0.3 percent +0.1 pF)
E	-20 to +100	±(0.1 percent +0.1 pF)
F	0 to +70	±(0.05 percent +0.1 pF)

Dielectric withstanding voltage:
Method 301 of MIL-STD-202:
AC sine-wave potential rms equal to peak working voltage at 100 cycles or less for not less than 5 seconds.

Barometric pressure:
Method 105 of MIL-STD-202, condition B (50,000 ft).
Test potential: Capacitors rated above 2,000 volts - 80 percent of rated peak voltage.
Capacitors rated 2,000 volts or less - 150 percent of rated peak voltage.

Insulation resistance:
Method 302 of MIL-STD-202, condition A.
At 25° C:
7,500 megohms minimum for style CM70.
10,000 megohms minimum for styles CM71 and CM73.
At 70° C (CM70):
0 to 5,000 pF --- 2,000 megohms minimum.
Greater than 5,000 pF --- 10 megohm microfarads.
At 125° C (CM71 and CM73):
0 to 5,000 pF --- 3,000 megohms minimum.
Greater than 5,000 pF --- 15 megohm microfarads.

Dissipation factor, maximum - See MIL-C-5.

Capacitance:
Method 305 of MIL-STD-202.

Current rating: Passage of rated current shall not cause the temperature of the capacitor body's external surface to rise above the ambient temperature by more than 15° C for style CM70 and not more than 40° C for styles CM71 and CM73.

Vibration:
Method 201 of MIL-STD-202.

Temperature cycling:
Method 102 of MIL-STD-202, condition D, except the high temperature shall be as follows: Symbol M - +70° C
Symbol O - +125° C

Immersion cycling:
Method 104 of MIL-STD-202, condition B,
Dielectric withstanding voltage - Meet initial requirement.
Insulation resistance - 3,000 megohms minimum.
Dissipation factor - Not greater than 150 percent of initial value.
Capacitance change - Shall not exceed ±4 percent of nominal value or 1 pF, whichever is greater.

Shock (specified pulse): Method 213 of MIL-STD-202, condition I (100G(pk)).

Moisture resistance:
Method 106 of MIL-STD-202:
Insulation resistance - At least 30 percent of initial requirement.
Dissipation factor - Not greater than 150 percent of initial value.
Capacitance change - Shall not exceed ±5 percent of nominal value or 1 pF, whichever is greater, for characteristic B: ±2 percent of nominal value or 1 pF, whichever is greater for characteristics C, D, E and F.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

Temperature coefficient and capacitance drift:
Within the limits specified for the applicable characteristic

Low temperature storage and life:
48 hours at -55 $^{+0°}_{-2}$ C immediately followed by qualification or performance test, as applicable.
Qualification test - 1,000 hours at the applicable high test temperature with rated current at 1 MHz.
Dielectric withstanding voltage - Initial requirement.
Insulation resistance - Initial requirement.
Dissipation factor - Not greater than 150 percent of initial requirement.
Capacitance change - Shall not exceed ±5 percent of nominal value or 1 pF, whichever is greater, for characteristic B; ±2 percent of nominal value of 1 pF, whichever is greater, for characteristics C, D, E, and F.

Performance check - 250 hours at conditions specified for qualification test.
Dielectric withstanding voltage - Initial requirement.
Insulation resistance - Initial requirement.
Dissipation factor - Not greater than 150 percent of initial requirement.
Capacitance change - Shall not exceed ±5 percent of nominal value or 1 pF, whichever is greater, for characteristic B; ±2 percent of nominal value or 1 pF, whichever is greater, for characteristics C, D, E and F.

Continuation test - Units that have been subjected to the 250 hour test shall be continued for an additional 750 hours and meet the requirements for the qualification test. (This test not applicable to styles CM71 and CM73.)

Qualification inspection:
Qualification inspection (Group D) is required.

Source: https://assist.dla.mil -- Downloaded: 2026l0-15T15:51Z
Check the source to verify that this is the currentversion before use.

TABLE I. Styles CM70, CM71, and CM73.

Type designation 1/	Capacitance value (pF)	Peak working voltage (volts)	Rated current at frequencies (rms amps)				Characteristic
			3.0 mHz	1.0 mHz	0.3 mHz	0.1 mHz	
CM70-N470-M1	47	5,000	1.5	0.62	0.20	0.082	B, D, F
CM70-N510-M1	51	5,000	1.6	0.68	0.22	0.062	
CM70-N560-M1	56	5,000	1.8	0.75	0.27	0.068	
CM70-N620-M1	62	5,000	1.8	0.82	0.30	0.075	
CM70-N680-M1	68	5,000	2.0	0.91	0.33	0.075	
CM70-N750-M1	75	5,000	2.0	1.0	0.36	0.082	
CM70-N820-M1	82	5,000	2.2	1.1	0.39	0.091	
CM70-N910-M1	91	5,000	2.4	1.2	0.43	0.10	
CM70-N101-M1	100	5,000	2.4	1.2	0.47	0.10	
CM70-N111-M1	110	5,000	2.7	1.3	0.51	0.15	
CM70-N121-M1	120	5,000	2.7	1.5	0.56	0.18	
CM70-N131-M1	130	5,000	3.0	1.6	0.62	0.22	
CM70-N151-M1	150	5,000	3.3	1.8	0.68	0.24	
CM70-N161-M1	160	5,000	3.3	1.8	0.75	0.27	
CM70-N181-M1	180	5,000	3.3	2.0	0.82	0.30	
CM70-N201-M1	200	5,000	3.6	2.0	0.82	0.33	
CM70-N221-M1	220	5,000	3.6	2.2	0.91	0.39	
CM70-N241-M1	240	5,000	3.6	2.4	1.0	0.43	
CM70-N271-M1	270	5,000	3.9	2.4	1.1	0.47	
CM70-N301-M1	300	5,000	3.9	2.7	1.1	0.51	
CM70-N331-M1	330	5,000	4.3	2.7	1.2	0.51	
CM70-N361-M1	360	5,000	4.3	2.7	1.3	0.56	
CM70-N391-M1	390	5,000	4.3	2.7	1.3	0.62	
CM70-N431-M1	430	5,000	4.7	3.0	1.5	0.68	
CM70-N471-M1	470	5,000	4.7	3.3	1.5	0.68	
CM70-N511-M1	510	5,000	4.7	3.3	1.6	0.75	
CM70-N561-M1	560	5,000	5.1	3.6	1.8	0.82	
CM70-N621-M1	620	5,000	5.1	3.6	1.8	0.82	
CM70-N681-M1	680	5,000	5.1	3.6	2.0	0.91	
CM70-N751-M1	750	5,000	5.6	3.9	2.2	0.91	
CM70-N821-M1	820	5,000	5.6	3.9	2.4	1.0	
CM70-N911-M1	910	5,000	5.6	4.3	2.4	1.1	
CM70-N102-M1	1,000	5,000	6.2	4.3	2.4	1.2	
CM70-N112-M1	1,100	5,000	6.2	4.7	2.7	1.2	
CM70-N122-M1	1,200	5,000	6.2	4.7	2.7	1.3	
CM70-N132-M1	1,300	5,000	6.8	5.1	3.0	1.3	
CM70-N152-M1	1,500	5,000	6.8	5.1	3.3	1.5	
CM70-N162-M1	1,600	5,000	6.8	5.6	3.6	1.5	
CM70-N182-M1	1,800	5,000	7.5	5.6	3.6	1.6	
CM70-N202-M1	2,000	5,000	7.5	6.2	3.6	1.8	
CM70-N222-M1	2,200	5,000	7.5	6.2	3.9	2.0	
CM70-N242-M1	2,400	5,000	8.2	6.2	4.3	2.0	
CM70-L272-M1	2,700	3,000	8.2	6.8	4.3	2.2	
CM70-L302-M1	3,000	3,000	8.2	6.8	4.7	2.2	
CM70-L332-M1	3,300	3,000	8.2	6.8	4.7	2.4	
CM70-L362-M1	3,600	3,000	8.2	7.5	5.1	2.4	
CM70-L392-M1	3,900	3,000	9.1	7.5	5.6	2.7	
CM70-L432-M1	4,300	3,000	9.1	7.5	5.6	2.7	
CM70-L472-M1	4,700	3,000	9.1	8.2	6.2	3.0	B, D, F

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CM70, CM71, and CM73. - Continued

Type designation 1/2/	Capacitance value (pF)	Peak working voltage (volts)	Rated current at frequencies (rms amps)				Characteristic
			3.0 mHz	1.0 mHz	0.3 mHz	0.1 mHz	
CM70-L512-M1	5,100	3,000	9.1	8.2	6.2	3.0	B, D, F
CM70-L562-M1	5,600	3,000	9.1	9.1	6.2	3.3	
CM70-L622-M1	6,200	3,000	10	9.1	6.8	3.6	
CM70-L682-M1	6,800	3,000	10	9.1	6.8	3.6	
CM70-L752-M1	7,500	3,000	10	9.1	6.8	3.9	
CM70-J822-M1	8,200	2,000	10	10	7.5	3.9	
CM70-J912-M1	9,100	2,000	11	10	8.2	4.3	
CM70-J103-M1	10,000	2,000	11	11	8.2	4.3	
CM70-J113-M1	11,000	2,000	11	11	8.2	4.7	
CM70-J123-M1	12,000	2,000	11	11	9.1	4.7	
CM70-J133-M1	13,000	2,000	12	12	9.1	5.1	
CM70-J153-M1	15,000	2,000	12	12	10	5.1	
CM70-J163-M1	16,000	2,000	12	12	10	5.6	
CM70-J183-M1	18,000	2,000	12	13	10	5.6	
CM70-J203-M1	20,000	2,000	13	13	11	6.2	
CM70-J223-M1	22,000	2,000	13	13	11	6.2	
CM70-H243-M1	24,000	1,500	13	15	12	6.8	
CM70-H273-M1	27,000	1,500	13	15	12	6.8	
CM70-H303-M1	30,000	1,500	13	12	12	6.8	
CM70-H333-M1	33,000	1,500	13	15	13	7.5	
CM70-H363-M1	36,000	1,500	13	16	13	7.5	
CM70-H393-M1	39,000	1,500	15	16	13	7.5	B, D, F
CM70-H433-M1	43,000	1,500	15	16	13	7.5	C, E
CM70-H473-M1	47,000	1,500	15	16	15	7.5	
CM70-H513-M1	51,000	1,500	15	16	15	8.2	
CM70-F563-M1	56,000	1,000	15	18	15	8.2	
CM70-F623-M1	62,000	1,000	15	18	15	8.2	
CM70-F683-M1	68,000	1,000	15	18	15	8.2	
CM70-F753-M1	75,000	1,000	15	18	15	8.2	
CM70-F823-M1	82,000	1,000	15	18	15	8.2	
CM70-D913-M1	91,000	500	15	18	15	8.2	C, E
CM70-D104-M1	100,000	500	15	18	15	8.2	D, E
CM7--N470-O1	47	5,000	1.5	.62	.20	.062	
CM7--N510-O1	51	5,000	1.6	.68	.22	.062	
CM7--N560-O1	56	5,000	1.8	.75	.27	.068	
CM7--N620-O1	62	5,000	1.8	.82	.30	.075	
CM7--N680-O1	68	5,000	2.0	.91	.33	.075	
CM7--N750-O1	75	5,000	2.0	1.0	.36	.082	
CM7--N820-O1	82	5,000	2.2	1.1	.39	.091	
CM7--N910-O1	91	5,000	2.4	1.2	.43	.10	
CM7--N101-O1	100	5,000	2.4	1.2	.47	.10	
CM7--N111-O1	110	5,000	2.7	1.3	.51	.15	
CM7--N121-O1	120	5,000	2.7	1.5	.56	.18	
CM7--N131-O1	130	5,000	3.0	1.6	.62	.22	
CM7--N151-O1	150	5,000	3.3	1.8	.68	.24	
CM7--N161-O1	160	5,000	3.3	1.8	.75	.27	
CM7--N181-O1	180	5,000	3.3	2.0	.82	.30	
CM7--N201-O1	200	5,000	3.6	2.0	.82	.33	
CM7--N221-O1	220	5,000	3.6	2.2	.91	.39	D, E

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CM70, CM71, and CM73. - Continued

Type designation 1/ 2/	Capacitance value (pF)	Peak working voltage (volts)	Rated current at frequencies (rms amps)				Characteristic
			3.0 mHz	1.0 mHz	0.3 mHz	0.1 mHz	
CM7--N241-O1	240	5,000	3.6	2.4	1.0	.43	D, E
CM7--N251-O1	250	5,000	3.6	2.4	1.0	.43	
CM7--N271-O1	270	5,000	3.9	2.4	1.1	.47	
CM7--N301-O1	300	5,000	3.9	2.7	1.1	.51	
CM7--N331-O1	330	5,000	4.3	2.7	1.2	.51	
CM7--N361-O1	360	5,000	4.3	2.7	1.3	.56	
CM7--N391-O1	390	5,000	4.3	2.7	1.3	.62	
CM7--N431-O1	430	5,000	4.7	3.0	1.5	.68	
CM7--N471-O1	470	5,000	4.7	3.3	1.5	.68	
CM7--N501-O1	500	5,000	4.7	3.3	1.6	.75	
CM7--N511-O1	510	5,000	4.7	3.3	1.6	.75	
CM7--N561-O1	560	5,000	5.1	3.6	1.8	.82	
CM7--N601-O1	600	5,000	5.1	3.6	1.8	.82	
CM7--N621-O1	620	5,000	5.1	3.6	1.8	.82	
CM7--N661-O1	680	5,000	5.1	3.6	2.0	.91	
CM7--N751-O1	750	5,000	5.6	3.9	2.2	.91	
CM7--N821-O1	820	5,000	5.6	3.9	2.4	1.0	
CM7--N911-O1	910	5,000	5.6	4.3	2.4	1.1	
CM7--N102-O1	1,000	5,000	6.2	4.3	2.4	1.2	
CM7--N112-O1	1,100	5,000	6.2	4.7	2.7	1.2	
CM7--N122-O1	1,200	5,000	6.2	4.7	2.7	1.3	
CM7--N132-O1	1,300	5,000	6.8	5.1	3.0	1.3	
CM7--N152-O1	1,500	5,000	6.8	5.1	3.3	1.5	
CM7--N162-O1	1,600	5,000	6.8	5.6	3.6	1.5	
CM7--N182-O1	1,800	5,000	7.5	5.6	3.6	1.6	
CM7--N202-O1	2,000	5,000	7.5	6.2	3.6	1.8	
CM7--N222-O1	2,200	5,000	7.5	6.2	3.9	2.0	
CM7--N242-O1	2,400	5,000	8.2	6.2	4.3	2.0	
CM7--L272-O1	2,700	3,000	8.2	6.8	4.3	2.2	
CM7--L302-O1	3,000	3,000	8.2	6.8	4.7	2.2	
CM7--L332-O1	3,300	3,000	8.2	6.8	4.7	2.4	
CM7--L362-O1	3,600	3,000	8.2	7.5	5.1	2.4	
CM7--L392-O1	3,900	3,000	9.1	7.5	5.6	2.7	
CM7--L432-O1	4,300	3,000	9.1	7.5	5.6	2.7	
CM7--L472-O1	4,700	3,000	9.1	8.2	6.2	3.0	
CM7--L502-O1	5,000	3,000	9.1	8.2	6.2	3.0	
CM7--L512-O1	5,100	3,000	9.1	8.2	6.2	3.0	
CM7--L562-O1	5,600	3,000	9.1	9.1	6.2	3.3	
CM7--L602-O1	6,000	3,000	10.0	9.1	6.8	3.6	
CM7--L622-O1	6,200	3,000	10.0	9.1	6.8	3.6	
CM7--L662-O1	6,800	3,000	10.0	9.1	6.8	3.6	
CM7--L752-O1	7,500	3,000	10.0	9.1	6.8	3.9	
CM7--J822-O1	8,200	2,000	10.0	10.0	7.5	3.9	
CM7--J912-O1	9,100	2,000	11.0	10.0	8.2	4.3	
CM7--J103-O1	10,000	2,000	11.0	11.0	8.2	4.3	
CM7--J113-O1	11,000	2,000	11.0	11.0	8.2	4.7	
CM7--J123-O1	12,000	2,000	11.0	11.0	9.1	4.7	
CM7--J133-O1	13,000	2,000	12.0	12.0	9.1	5.1	
CM7--J153-O1	15,000	2,000	12.0	12.0	10.0	5.1	
CM7--J163-O1	16,000	2,000	12.0	12.0	10.0	5.6	
CM7--J183-O1	18,000	2,000	12.0	13.0	10.0	5.6	
CM7--J203-O1	20,000	2,000	13.0	13.0	11.0	6.2	D, E

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. Styles CM70, CM71, and CM73. - Continued

Type designation 1/2/	Capacitance value (pF)	Peak working voltage (volts)	Rated current at frequencies				Characteristic
			3.0 mHz	1.0 mHz	0.3 mHz	0.1 mHz	
CM7--J223-O1	22,000	2,000	13.0	13.0	11.0	6.2	D, E
CM7--H243-O1	24,000	1,500	13.0	15.0	12.0	6.8	
CM7--H273-O1	27,000	1,500	13.0	15.0	12.0	6.8	
CM7--H303-O1	30,000	1,500	13.0	15.0	12.0	6.8	
CM7--H333-O1	33,000	1,500	13.0	15.0	13.0	7.5	
CM7--H363-O1	36,000	1,500	13.0	16.0	13.0	7.5	
CM7--H393-O1	39,000	1,500	15.0	16.0	13.0	7.5	
CM7--H433-O1	43,000	1,500	15.0	16.0	13.0	7.5	
CM7--H473-O1	47,000	1,500	15.0	16.0	13.0	7.5	
CM7--H503-O1	50,000	1,500	15.0	16.0	15.0	7.5	
CM7--H513-O1	51,000	1,500	15.0	16.0	15.0	7.5	
CM7--F563-O1	56,000	1,000	15.0	16.0	15.0	8.2	
CM7--F623-O1	62,000	1,000	15.0	18.0	15.0	8.2	
CM7--F683-O1	68,000	1,000	15.0	18.0	15.0	8.2	
CM7--F753-O1	75,000	1,000	15.0	18.0	15.0	8.2	
CM7--D823-O1	82,000	500	15.0	18.0	15.0	8.2	
CM7--D913-O1	91,000	500	15.0	18.0	15.0	8.2	
CM7--D104-O1	100,000	500	15.0	18.0	15.0	8.2	
CM7--D204-O1	200,000	500	15.0	18.0	15.0	8.2	
CM7--D254-O1	250,000	500	15.0	18.0	15.0	8.2	D, E

1/ For style CM70, the complete type designation will include additional letter symbols to indicate characteristic and capacitance tolerance.
2/ For styles CM71 and CM73, the complete type designation will include additional symbols to indicate style, characteristic, and capacitance tolerance.

Custodians:
Army - EL
Navy - EC
Air Force - 80

Review activities:
Army - EL
Navy - AS, OS, EC, SH
Air Force - 11, 17, 80
DSA - ES

User activities:
Army -
Navy - MC, CG
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5910-1047-1)

☆ U. S. GOVERNMENT PRINTING OFFICE: 1972 -714-538 1793

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:51Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D. C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICIAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-014-1800

Source: https://assist.dla.mil -- Downloaded: 202610-15T15:51Z
Check the source to verify that this is the current version before use.