
MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC,

STYLE CM14

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the capacitors described herein shall consist of this specification and the latest issue of MIL-C-5.

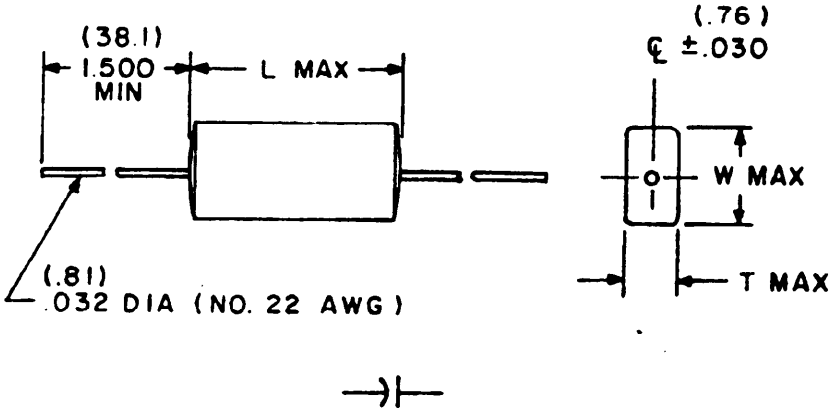

CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches. (See table I.)
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Millimeters are in parentheses.

FIGURE 1. Capacitor configuration.

FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. Type designations, electrical characteristics and dimensions.

Style CM14												
Type designation 1/	Capacitance value µF	DC rated voltage (volts)	Capacitance tolerances available	Dimensions 2/ (see figure 1)								
				L			W			T		
CM14HH103-03	0.010	1500	J,K	1.50	(38.1)		0.50	(12.7)		0.105	(2.7)	
CM14HH123-03	0.012	1500	J,K	1.50	(38.1)		0.50	(12.7)		0.130	(3.3)	
CM14HH153-03	0.015	1500	J,K	1.50	(38.1)		0.50	(12.7)		0.145	(3.7)	
CM14HH183-03	0.018	1500	J,K	1.50	(38.1)		0.75	(19.05)		0.140	(3.6)	
CM14HH223-03	0.022	1500	J,K	1.50	(38.1)		0.75	(19.05)		0.170	(3.8)	
CM14HH273-03	0.027	1500	J,K	1.50	(38.1)		0.75	(19.05)		0.170	(4.3)	
CM14HH333-03	0.033	1500	J,K	1.50	(38.1)		0.75	(19.05)		0.190	(4.8)	
CM14HH393-03	0.039	1500	J,K	1.50	(38.1)		0.75	(19.05)		0.205	(5.2)	
CM14HH473-03	0.047	1500	J,K	2.625	(66.7)		0.75	(19.05)		0.140	(3.6)	
CM14HH563-03	0.056	1500	J,K	2.625	(66.7)		0.75	(19.05)		0.155	(3.4)	
CM14HH683-03	0.068	1500	J,K	2.625	(66.7)		0.75	(19.05)		0.185	(4.7)	
CM14HH823-03	0.082	1500	J,K	2.625	(66.7)		0.75	(19.05)		0.210	(5.3)	
CM14HH104-03	0.10	1500	J,K	2.625	(66.7)		0.75	(19.05)		0.220	(5.6)	
CM14HH124-03	0.12	1500	J,K	2.625	(66.7)		1.25	(32.0)		0.165	(4.2)	
CM14HH154-03	0.15	1500	J,K	2.625	(66.7)		1.25	(32.0)		0.195	(5.0)	
CM14HH184-03	0.18	1500	J,K	2.625	(66.7)		1.25	(32.0)		0.215	(5.6)	
CM14HH224-03	0.22	1500	J,K	2.625	(66.7)		1.25	(32.0)		0.260	(6.6)	
CM14HH274-03	0.27	1500	J,K	2.625	(66.7)		1.25	(32.0)		0.310	(7.9)	
CM14HH334-03	0.33	1500	J,K	3.825	(97.1)		2.00	(50.8)		0.170	(4.4)	
CM14HH394-03	0.39	1500	J,K	3.825	(97.1)		2.00	(50.8)		0.195	(5.0)	
CM14HH474-03	0.47	1500	J,K	3.825	(97.1)		2.00	(50.8)		0.210	(5.3)	
CM14HH564-03	0.56	1500	J,K	3.825	(97.1)		2.00	(50.8)		0.245	(6.2)	
CM14HH684-03	0.68	1500	J,K	3.825	(97.1)		2.00	(50.8)		0.290	(7.4)	
CM14HH824-03	0.82	1500	J,K	5.125	(130.1)		2.00	(50.8)		0.260	(6.6)	
CM14HH105-03	1.00	1500	J,K	5.125	(130.1)		2.00	(50.8)		0.310	(7.9)	
CM14HJ103-03	0.010	2000	J,K	1.50	(38.1)		0.75	(19.05)		0.125	(3.2)	
CM14HJ123-03	0.012	2000	J,K	1.50	(38.1)		0.75	(19.05)		0.135	(3.5)	
CM14HJ153-03	0.015	2000	J,K	1.50	(38.1)		0.75	(19.05)		0.145	(3.7)	
CM14HJ183-03	0.018	2000	J,K	1.50	(38.1)		0.75	(19.05)		0.175	(4.5)	
CM14HJ223-03	0.022	2000	J,K	1.50	(38.1)		0.75	(19.05)		0.185	(4.7)	
CM14HJ273-03	0.027	2000	J,K	1.50	(38.1)		0.75	(19.05)		0.225	(5.8)	
CM14HJ333-03	0.033	2000	J,K	2.625	(66.7)		0.75	(19.05)		0.135	(3.5)	
CM14HJ393-03	0.039	2000	J,K	2.625	(66.7)		0.75	(19.05)		0.165	(4.2)	
CM14HJ473-03	0.047	2000	J,K	2.625	(66.7)		0.75	(19.05)		0.185	(4.7)	
CM14HJ563-03	0.056	2000	J,K	2.625	(66.7)		0.75	(19.05)		0.205	(5.2)	
CM14HJ683-03	0.068	2000	J,K	2.625	(66.7)		0.75	(19.05)		0.225	(5.8)	
CM14HJ823-03	0.082	2000	J,K	2.625	(66.7)		1.25	(32.0)		0.175	(4.5)	
CM14HJ104-03	0.10	2000	J,K	2.625	(66.7)		1.25	(32.0)		0.195	(5.0)	
CM14HJ124-03	0.12	2000	J,K	2.625	(66.7)		1.25	(32.0)		0.215	(5.6)	
CM14HJ154-03	0.15	2000	J,K	2.625	(66.7)		1.25	(32.0)		0.285	(7.2)	
CM14HJ184-03	0.18	2000	J,K	2.625	(66.7)		1.25	(32.0)		0.355	(9.0)	
CM14HJ224-03	0.22	2000	J,K	3.825	(97.1)		2.00	(50.8)		0.155	(3.4)	
CM14HJ274-03	0.27	2000	J,K	3.825	(97.1)		2.00	(50.8)		0.185	(4.7)	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. Type designations, electrical characteristics and dimensions - Continued.

Style CM14										
Type designation 1/	Capacitance value µF	DC rated voltage (volts)	Capacitance tolerances available	Dimensions 2/ (see figure 1)						
				L		W		T		
CM14HJ334-03	0.33	2000	J,K	3.825	(97.1)	2.00	(50.8)	0.215	(5.6)
CM14HJ394-03	0.39	2000	J,K	3.825	(97.1)	2.00	(50.8)	0.245	(6.2)
CM14HJ474-03	0.47	2000	J,K	3.825	(97.1)	2.00	(50.8)	0.305	(7.7)
CM14HJ564-03	0.56	2000	J,K	5.125	(130.1)	2.00	(50.8)	0.255	(6.5)
CM14HJ684-03	0.68	2000	J,K	5.125	(130.1)	2.00	(50.8)	0.315	(8.0)
CM14HJ824-03	0.82	2000	J,K	5.125	(130.1)	2.00	(50.8)	0.385	(9.8)
CM14HJ105-03	1.00	2000	J,K	5.125	(130.1)	2.00	(50.8)	0.495	(12.6)
CM14HL103-03	0.010	3000	J,K	1.50	(38.1)	0.75	(19.05)	0.255	(6.5)
CM14HL123-03	0.012	3000	J,K	1.50	(38.1)	0.75	(19.05)	0.285	(7.2)
CM14HL153-03	0.015	3000	J,K	2.625	(66.7)	0.75	(19.05)	0.155	(3.4)
CM14HL183-03	0.018	3000	J,K	2.625	(66.7)	0.75	(19.05)	0.175	(4.5)
CM14HL223-03	0.022	3000	J,K	2.625	(66.7)	0.75	(19.05)	0.195	(4.9)
CM14HL273-03	0.027	3000	J,K	2.625	(66.7)	0.75	(19.05)	0.255	(6.4)
CM14HL333-03	0.033	3000	J,K	2.625	(66.7)	1.25	(32.0)	0.195	(4.9)
CM14HL393-03	0.039	3000	J,K	2.625	(66.7)	1.25	(32.0)	0.205	(5.2)
CM14HL473-03	0.047	3000	J,K	2.625	(66.7)	1.25	(32.0)	0.235	(5.9)
CM14HL563-03	0.056	3000	J,K	2.625	(66.7)	1.25	(32.0)	0.247	(6.3)
CM14HL683-03	0.068	3000	J,K	2.625	(66.7)	1.25	(32.0)	0.285	(7.3)
CM14HL823-03	0.082	3000	J,K	3.875	(98.4)	2.00	(50.8)	0.155	(3.4)
CM14HL104-03	0.10	3000	J,K	3.875	(98.4)	2.00	(50.8)	0.175	(4.5)
CM14HL124-03	0.12	3000	J,K	3.875	(98.4)	2.00	(50.8)	0.205	(5.2)
CM14HL154-03	0.15	3000	J,K	3.875	(98.4)	2.00	(50.8)	0.245	(6.3)
CM14HL184-03	0.18	3000	J,K	3.875	(98.4)	2.00	(50.8)	0.295	(5.0)
CM14HL224-03	0.22	3000	J,K	3.875	(98.4)	2.00	(50.8)	0.305	(7.8)
CM14HL274-03	0.27	3000	J,K	5.125	(130.1)	2.00	(50.8)	0.275	(7.0)
CM14HL334-03	0.33	3000	J,K	5.125	(130.1)	2.00	(50.8)	0.325	(8.3)
CM14HL394-03	0.39	3000	J,K	5.125	(130.1)	2.00	(50.8)	0.395	(10.0)
CM14HL474-03	0.47	3000	J,K	5.125	(130.1)	3.50	(88.9)	0.245	(6.3)
CM14HL564-03	0.56	3000	J,K	5.125	(130.1)	3.50	(88.9)	0.285	(7.3)
CM14HL684-03	0.68	3000	J,K	5.125	(130.1)	3.50	(88.9)	0.335	(8.6)
CM14HL824-03	0.82	3000	J,K	5.125	(130.1)	3.50	(88.9)	0.395	(11.0)
CM14HL105-03	1.00	3000	J,K	5.125	(130.1)	3.50	(88.9)	0.495	(12.6)
CM14HM562-03	0.0056	4000	J,K	2.625	(66.7)	0.75	(19.05)	0.125	(3.2)
CM14HM682-03	0.0068	4000	J,K	2.625	(66.7)	0.75	(19.05)	0.135	(3.5)
CM14HM822-03	0.0082	4000	J,K	2.625	(66.7)	0.75	(19.05)	0.155	(3.5)
CM14HM103-03	0.010	4000	J,K	2.625	(66.7)	0.75	(19.05)	0.175	(4.5)
CM14HM123-03	0.012	4000	J,K	2.625	(66.7)	0.75	(19.05)	0.205	(5.2)
CM14HM153-03	0.015	4000	J,K	2.625	(66.7)	0.75	(19.05)	0.255	(6.5)
CM14HM183-03	0.018	4000	J,K	2.625	(66.7)	1.25	(32.0)	0.175	(4.5)
CM14HM223-03	0.022	4000	J,K	2.625	(66.7)	1.25	(32.0)	0.185	(4.7)

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 202640-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. Type designations, electrical characteristics and dimensions - Continued.

Style CM14										
Type designation 1/	Capacitance value µF	DC rated voltage (volts)	Capacitance tolerances available	Dimensions 2/ (see figure 1)						
				L		W		T		
CM14HM273-03	0.027	4000	J,K	2.625	(66.7)	1.25	(32.0)	0.225	(5.8)	
CM14HM333-03	0.033	4000	J,K	2.625	(66.7)	1.25	(32.0)	0.275	(7.0)	
CM14HM393-03	0.039	4000	J,K	2.625	(66.7)	1.25	(32.0)	0.335	(8.5)	
CM14HM473-03	0.047	4000	J,K	3.875	(98.4)	2.00	(50.8)	0.165	(4.2)	
CM14HM563-03	0.056	4000	J,K	3.875	(98.4)	2.00	(50.8)	0.175	(4.5)	
CM14HM683-03	0.068	4000	J,K	3.875	(98.4)	2.00	(50.8)	0.205	(5.2)	
CM14HM823-03	0.082	4000	J,K	3.875	(98.4)	2.00	(50.8)	0.235	(6.0)	
CM14HM104-03	0.10	4000	J,K	3.875	(98.4)	2.00	(50.8)	0.275	(7.0)	
CM14HM124-03	0.12	4000	J,K	5.125	(130.1)	2.00	(50.8)	0.255	(6.5)	
CM14HM154-03	0.15	4000	J,K	5.125	(130.1)	2.00	(50.8)	0.305	(7.8)	
CM14HM184-03	0,18	4000	J,K	5.125	(130.1)	2.00	(50.8)	0.345	(6.8)	
CM14HM224-03	0.22	4000	J,K	5.125	(130.1)	3.50	(88.9)	0.235	(6.0)	
CM14HM274-03	0.27	4000	J,K	5.125	(130.1)	3.50	(88.9)	0.295	(7.5)	
CM14HM334-03	0.33	4000	J,K	5.125	(130.1)	3.50	(88.9)	0.345	(6.8)	
CM14HM394-03	0.39	4000	J,K	5.125	(130.1)	3.50	(88.9)	0.395	(10.0)	
CM14HM474-03	0.47	4000	J,K	5.125	(130.1)	3.50	(88.9)	0.475	(12.1)	
CM14HM564-03	0.56	4000	J,K	5.125	(130.1)	3.50	(88.9)	0.555	(14.1)	
CM14HN332-03	0.0033	5000	J,K	2.625	(66.7)	0.75	(19.05)	0.175	(4.5)	
CM14HN392-03	0.0039	5000	J,K	2.625	(66.7)	0.75	(19.05)	0.195	(5.0)	
CM14HN472-03	0.0047	5000	J,K	2.625	(66.7)	0.75	(19.05)	0.215	(5.5)	
CM14HN562-03	0.0056	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.175	(4.5)	
CM14HN682-03	0.0068	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.180	(4.6)	
CM14HN822-03	0.0082	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.190	(4.8)	
CM14HN103-03	0.010	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.210	(5.3)	
CM14HN123-03	0.012	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.240	(6.1)	
CM14HN153-03	0.015	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.260	(6.7)	
CM14HN183-03	0.018	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.290	(7.4)	
CM14HN223-03	0.022	5000	J,K	2.625	(66.7)	1.25	(32.0)	0.345	(8.8)	
CM14HN273-03	0.027	5000	J,K	3.875	(98.4)	2.00	(50.8)	0.200	(5.0)	
CM14HN333-03	0.033	5000	J,K	3.875	(98.4)	2.00	(50.8)	0.215	(5.5)	
CM14HN393-03	0.039	5000	J,K	3.875	(98.4)	2.00	(50.8)	0.240	(6.0)	
CM14HN473-03	0.047	5000	J,K	3.875	(98.4)	2.00	(50.8)	0.260	(6.6)	
CM14HN563-03	0.056	5000	J,K	3.875	(98.4)	2.00	(50.8)	0.290	(7.4)	
CM14HN683-03	0.068	5000	J,K	3.875	(98.4)	2.00	(50.8)	0.270	(6.9)	
CM14HN823-03	0.082	5000	J,K	5.125	(130.1)	2.00	(50.8)	0.300	(7.6)	
CM14HN104-03	0.10	5000	J,K	5.125	(130.1)	2.00	(50.8)	0.340	(6.7)	
CM14HN124-03	0.12	5000	J,K	5.125	(130.1)	2.00	(50.8)	0.400	(10.2)	
CM14HN154-03	0.15	5000	J,K	5.125	(130.1)	3.50	(88.9)	0.290	(7.4)	
CM14HN184-03	0.18	5000	J,K	5.125	(130.1)	3.50	(88.9)	0.340	(8.7)	
CM14HN224-03	0.22	5000	J,K	5.125	(130.1)	3.50	(88.9)	0.370	(9.4)	
CM14HN274-03	0.27	5000	J,K	5.125	(130.1)	3.50	(88.9)	0.500	(12.7)	
CM14HN334-03	0.33	5000	J,K	5.125	(130.1)	3.50	(88.9)	0.600	(15.24)	

See footnotes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. Type designations, electrical characteristics and dimensions - Continued.

Style CM14										
Type designation 1/	Capacitance value µF	DC rated voltage (volts)	Capacitance tolerances available	Dimensions 2/ (see figure 1)						
				L		W		T		
CM14HP222-03	0.0022	6000	J,K	2.625	(66.7)	0.75	(19.05)	0.195	(5.0)
CM14HP272-03	0.0027	6000	J,K	2.625	(66.7)	0.75	(19.05)	0.205	(5.2)
CM14HP332-03	0.0033	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.175	(4.5)
CM14HP392-03	0.0039	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.185	(4.7)
CM14HP472-03	0.0047	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.195	(5.0)
CM14HP562-03	0.0056	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.215	(5.5)
CM14HP682-03	0.0068	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.220	(5.6)
CM14HP822-03	0.0082	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.260	(6.6)
CM14HP103-03	0.010	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.280	(7.2)
CM14HP123-03	0.012	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.315	(8.0)
CM14HP153-03	0.015	6000	J,K	2.625	(66.7)	1.25	(32.0)	0.365	(9.3)
CM14HP183-03	0.018	6000	J,K	3.875	(98.4)	2.00	(50.8)	0.205	(5.2)
CM14HP223-03	0.022	6000	J,K	3.875	(98.4)	2.00	(50.8)	0.225	(5.7)
CM14HP273-03	0.027	6000	J,K	3.875	(98.4)	2.00	(50.8)	0.285	(7.3)
CM14HP333-03	0.033	6000	J,K	3.875	(98.4)	2.00	(50.8)	0.305	(7.8)
CM14HP393-03	0.039	6000	J,K	3.875	(98.4)	2.00	(50.8)	0.325	(8.3)
CM14HP473-03	0.047	6000	J,K	5.125	(130.1)	2.00	(50.8)	0.285	(7.2)
CM14HP563-03	0.056	6000	J,K	5.125	(130.1)	2.00	(50.8)	0.315	(8.0)
CM14HP683-03	0.068	6000	J,K	5.125	(130.1)	2.00	(50.8)	0.350	(8.9)
CM14HP823-03	0.082	6000	J,K	5.125	(130.1)	2.00	(50.8)	0.410	(10.4)
CM14HP104-03	0.10	6000	J,K	5.125	(130.1)	3.50	(88.9)	0.280	(7.1)
CM14HP124-03	0.12	6000	J,K	5.125	(130.1)	3.50	(88.9)	0.320	(8.1)
CM14HP154-03	0.15	6000	J,K	5.125	(130.1)	3.50	(88.9)	0.360	(9.1)
CM14HP184-03	0.18	6000	J,K	5.125	(130.1)	3.50	(88.9)	0.420	(10.7)
CM14HP224-03	0.22	6000	J,K	5.125	(130.1)	3.50	(88.9)	0.520	(13.2)

1/ Complete type designation will include additional symbols to indicate the tolerance.

2/ Dimensions are in inches (metrics in parentheses).

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Case: Cast epoxy.

Dielectric: Reconstituted mica.

Capacitance value: See table I.

Capacitance tolerance: J (±5%), K (±10%).

DC rated voltage: See table I.

Operating temperature range: O (-55°C to +125°C).

Vibration grade: Grade 3 (10 to 2,000 Hz).

Characteristic: H (PPM/°C -500 to +500; capacitance values available .0022 thru 1 µF).

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage: Method 301 of MIL-STD-202. Capacitors shall withstand a dc potential of 175% of the rated voltage applied between the terminals for one minute without breakdown. The test voltage shall be applied and discharged through a resistor of at least one ohm per volt.

Barometric pressure: Method 105, MIL-STD-202, test condition D, 100,000 feet. Test potential 100 percent of rated dc voltage.

Insulation resistance: Method 302, MIL-STD-202, test condition A.

At 25°C: .0018 to .01 µF, 100,000 megohms; .01 µF and greater, 1,000 megohm-microfarads.

At 125°C: .0018 to .01 µF, 1000 megohms minimum; .01 µF and greater, 300 megohm-microfarads.

Dissipation factor: The maximum dissipation factor of these capacitors shall be 0.5% when measured at a frequency of 1,000 Hz at +25°C, or else referred to measurements made at that frequency and temperature.

Capacitance: Method 305 of MIL-STD-202. Measurements shall be made at a frequency of 1,000 Hz at +25°C, or else referred to measurements made at that frequency and temperature.

Vibration: Method 204, MIL-STD-202, test condition D..

Temperature cycling: Method 107, MIL-STD-202, test condition A, except the high temperature shall be symbol 0, +125°C.

Immersion cycling: Method 104, MIL-STD-202, test condition B.

Dielectric withstanding voltage shall meet initial requirement.

Insulation resistance shall be at least 30 percent of initial requirement.

Dissipation factor shall be not greater than 150 percent of initial requirement.

Capacitance change shall not exceed ±1 percent of nominal value or 1 µF, whichever is greater.

Shock (specified pulse): Method 213, MIL-STD-202, test condition I, 100 G.

Solderability: Method 208, MIL-STD-202.

Terminal strength:

Pull test: Capacitor held by one terminal and a 5 pound load gradually applied to other terminal and maintained for at least 5 seconds.

Twist test: Five alternate 360° rotations.

Moisture resistance: Method 106 of MIL-STD-202.

Dielectric withstanding voltage shall meet initial requirement.

Insulation resistance shall be at least 30 percent of initial requirement.

Dissipation factor shall be not greater than 150 percent of initial requirement.

Capacitance change shall not exceed ±1 percent of nominal value of 1 µF, whichever is greater.

Temperature coefficient and capacitance drift: Shall be within the limits specified for the applicable characteristic.

Source: https://assist.dla.mil -- Downloaded: 2026l0-15T15:52Z
Check the source to verify that this is the currentversion before use.

Low temperature storage and life: 48 hours at -55 +0, -2°C immediately followed by qualification or performance test, as applicable.

Qualification test: 2,000 hours at applicable high test temperature with 150 percent of rated dc voltage applied.

Dielectric withstanding voltage shall meet initial requirement.

Insulation resistance shall meet initial requirement.

Dissipation factor shall be not greater than 150 percent of initial requirement.

Capacitance change shall not exceed ±1 percent of nominal value or 1 µF, whichever is greater.

Performance check shall be conditions an requirements in accordance with qualification test except that test duration shall be 250 hours.

Contamination test: Units that have been subjected to the 250 hour test shall be continued for an additional 1,750 hours and meet the requirements for the qualification test.

Qualification inspection:

Qualification inspection (group D) is required.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Navy - AS, OS
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME
Navy - MC, CG
Air Force - 19

Preparing activity:
Air Force - 85

(Project 5910-1434-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.