INCH-POUND

MIL-C-5/18E
18 June 2001
SUPERSEDING
MIL-C-5/18D
21 December 1970


MILITARY SPECIFICATION SHEET

CAPACITORS, FIXED, MICA DIELECTRIC, STYLES CM04, CM05 CM06, CM07, CM08, CM09, CM10, CM11, CM12, AND CM13


INACTIVE FOR NEW DESIGN AFTER
21 DECEMBER 1970. USE MIL-PRF-39001/5.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the capacitors described herein shall consist of this specification and MIL-C-5.

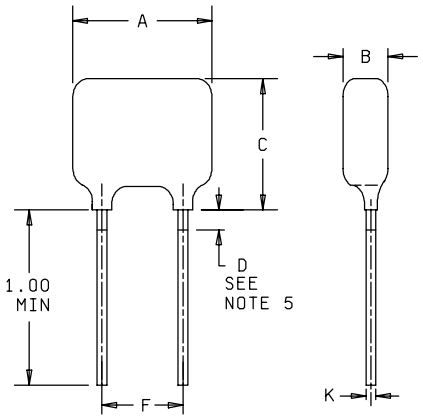

STRAIGHT LEAD
Styles CM04, CM05,
CM06, CM07, & CM08

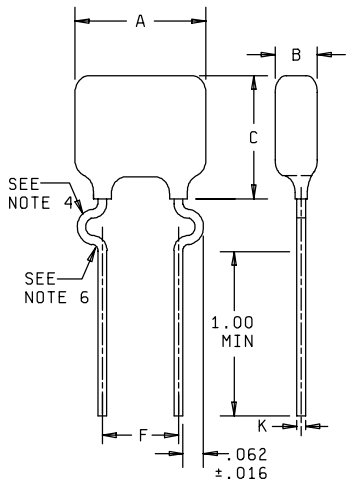

CRIMPED LEAD
Styles CM09, CM10
CM11, CM12, & CM13

NOTES:
1. Dimensions are in inches (see table I).
2. Millimeters are in parentheses (see table I).
3. Metric equivalents are given for general information only.
4. Magnitude of nicks, pinches or die marks appearing on the leads shall not exceed 1/5 of the wire diameter.
5. The “D” dimension may not be solderable as it may be covered by a clear epoxy or resinous coating.
6. No resinous phenolic or clear epoxy coating on leads below crimp.

Inches	mm
.016	.41
.062	1.57
1.00	25.40

FIGURE 1. Styles, straight lead and crimped lead.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Capacitance range (pF)	A		B		C, max		D, max Straight lead styles only	F Spacing ± .031 (.79)	K, Dia. ±.002 (.05)	
	Min	Max	Min	Max	Straight lead styles	Crimp lead styles			Straight lead styles	Crimp lead styles
Styles CM04 and CM09										
1 to 24, incl	.275 (6.99)	.360 (9.14)	.080 (2.03)	.190 (4.83)	.330 (8.38)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
27	.275 (6.99)	.370 (9.40)	.080 (2.03)	.190 (4.83)	.330 (8.38)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
30 to 68, incl	.275 (6.99)	.370 (9.40)	.080 (2.03)	.190 (4.83)	.340 (8.64)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
75	.275 (6.99)	.370 (9.40)	.090 (2.29)	.200 (5.08)	.340 (8.64)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
82	.275 (6.99)	.370 (9.40)	.090 (2.29)	.200 (5.08)	.350 (8.89)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
91 to 100, incl	.275 (6.99)	.370 (9.40)	.090 (2.29)	.200 (5.08)	.350 (8.89)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
110 to 120, incl	.275 (6.99)	.380 (9.65)	.090 (2.29)	.200 (5.08)	.350 (8.89)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
130	.275 (6.99)	.380 (9.65)	.090 (2.29)	.200 (5.08)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
150 to 160, incl	.275 (6.99)	.380 (9.65)	.100 (2.54)	.210 (5.33)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
180	.275 (6.99)	.390 (9.91)	.100 (2.54)	.210 (5.33)	.370 (9.40)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
200 to 390, incl	.275 (6.99)	.390 (9.91)	.110 (2.79)	.220 (5.59)	.380 (9.65)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (.36)	.020 (.51)
Styles CM05 and CM10										
1 to 62, incl	.390 (9.91)	.450 (11.43)	.080 (2.03)	.170 (4.32)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
68 to 82, incl	.390 (9.91)	.450 (11.43)	.080 (2.03)	.180 (4.57)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
91 to 100, incl	.390 (9.91)	.460 (11.68)	.080 (2.03)	.180 (4.57)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
110 to 130, incl	.390 (9.91)	.460 (11.68)	.080 (2.03)	.180 (4.57)	.370 (9.40)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
150 to 180, incl	.390 (9.91)	.460 (11.68)	.090 (2.29)	.190 (4.83)	.370 (9.40)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
200	.390 (9.91)	.460 (11.68)	.090 (2.29)	.190 (4.83)	.380 (9.65)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
220 to 240, incl	.390 (9.91)	.460 (11.68)	.100 (2.54)	.200 (5.08)	.380 (9.65)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
270 to 330, incl	.390 (9.91)	.470 (11.94)	.100 (2.54)	.210 (5.33)	.390 (9.91)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
360 to 390, incl	.390 (9.91)	.470 (11.94)	.110 (2.79)	.220 (5.59)	.400 (10.16)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (.64)	.032 (.81)
Styles CM06 and CM11										
430 to 470, incl	.550 (13.97)	.640 (16.26)	.080 (2.03)	.200 (5.08)	.510 (12.95)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
510 to 620, incl	.560 (14.22)	.650 (16.51)	.080 (2.03)	.200 (5.08)	.510 (12.95)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
680 to 910, incl	.560 (14.22)	.650 (16.51)	.080 (2.03)	.210 (5.33)	.510 (12.95)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
1000 to 1100, incl	.560 (14.22)	.650 (16.51)	.080 (2.03)	.220 (5.59)	.520 (13.21)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
1200 to 1300, incl	.570 (14.48)	.660 (16.78)	.090 (2.29)	.220 (5.59)	.520 (13.21)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
1500	.570 (14.48)	.660 (16.78)	.090 (2.29)	.230 (5.84)	.520 (13.21)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
1600	.570 (14.48)	.660 (16.78)	.100 (2.54)	.230 (5.84)	.530 (13.46)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
1800 to 2000, incl	.580 (14.73)	.670 (17.02)	.100 (2.54)	.240 (6.10)	.530 (13.46)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
2200	.580 (14.73)	.670 (17.02)	.110 (2.79)	.250 (6.35)	.530 (13.46)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
2400	.580 (14.73)	.670 (17.02)	.110 (2.79)	.260 (6.60)	.540 (13.72)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
2700	.590 (14.99)	.680 (17.27)	.120 (3.05)	.270 (6.86)	.540 (13.72)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
3000	.590 (14.99)	.680 (17.27)	.130 (3.30)	.280 (7.11)	.550 (13.97)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
3300	.590 (14.99)	.680 (17.27)	.140 (3.56)	.290 (7.37)	.550 (13.97)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
3600	.590 (14.99)	.680 (17.27)	.150 (3.81)	.300 (7.62)	.560 (14.22)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
3900	.590 (14.99)	.690 (17.53)	.150 (3.81)	.310 (7.87)	.560 (14.22)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
4300	.590 (14.99)	.690 (17.53)	.150 (3.81)	.330 (8.38)	.570 (14.48)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)
4700	.590 (14.99)	.700 (17.78)	.160 (4.06)	.350 (8.89)	.580 (14.73)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (.81)	.032 (.81)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions - Continued.

Capacitance range (pF)	A		B		C, max		D, max Straight lead styles only	F Spacing ± .031 (.79)	K, Dia. ±.002 (.05)	
	Min	Max	Min	Max	Straight lead styles	Crimp lead styles			Straight lead styles	Crimp lead styles
Styles CM07 and CM12										
5100	.680 (17.27)	.780 (19.81)	.150 (3.81)	.280 (7.11)	.860 (21.84)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
5600 to 6200, incl	.680 (17.27)	.780 (19.81)	.150 (3.81)	.290 (7.37)	.870 (22.10)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
6800	.680 (17.27)	.780 (19.81)	.150 (3.81)	.300 (7.62)	.870 (22.10)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
7500	.690 (17.53)	.790 (20.07)	.150 (3.81)	.310 (7.87)	.880 (22.35)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
8200	.690 (17.53)	.790 (20.07)	.150 (3.81)	.320 (8.13)	.880 (22.35)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
9100	.690 (17.53)	.790 (20.07)	.150 (3.81)	.330 (8.38)	.880 (22.35)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
10,000	.700 (17.78)	.800 (20.32)	.200 (5.08)	.340 (8.64)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
11,000	.700 (17.78)	.800 (20.32)	.200 (5.08)	.350 (8.89)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
12,000	.700 (17.78)	.800 (20.32)	.200 (5.08)	.360 (9.14)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
13,000	.710 (18.03)	.810 (20.57)	.200 (5.08)	.370 (9.40)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
15,000	.710 (18.03)	.810 (20.57)	.250 (6.35)	.390 (9.91)	.900 (22.86)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
16,000	.720 (18.29)	.820 (20.83)	.250 (6.35)	.410 (10.41)	.900 (22.86)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
18,000	.720 (18.29)	.820 (20.83)	.250 (6.35)	.430 (10.92)	.910 (23.11)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
20,000	.730 (18.54)	.830 (21.08)	.250 (6.35)	.450 (11.43)	.920 (23.37)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
Styles CM08 and CM13										
22,000	1.300 (33.02)	1.420 (36.07)	.180 (4.57)	.310 (7.87)	.880 (22.35)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
24,000	1.310 (33.27)	1.430 (36.32)	.180 (4.57)	.320 (8.13)	.880 (22.35)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
27,000	1.320 (33.53)	1.430 (36.32)	.180 (4.57)	.330 (8.38)	.880 (22.35)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
30,000	1.330 (33.78)	1.440 (36.58)	.180 (4.57)	.350 (8.89)	.890 (22.61)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
33,000	1.330 (33.78)	1.440 (36.58)	.180 (4.57)	.360 (9.14)	.890 (22.61)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
36,000	1.340 (34.04)	1.450 (36.83)	.180 (4.57)	.380 (9.65)	.900 (22.86)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
39,000	1.340 (34.04)	1.450 (36.83)	.220 (5.59)	.400 (10.16)	.900 (22.86)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
43,000	1.350 (34.29)	1.460 (37.08)	.225 (5.72)	.420 (10.67)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
47,000	1.360 (34.54)	1.470 (37.34)	.250 (6.35)	.450 (11.43)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
51,000	1.370 (34.80)	1.480 (37.59)	.250 (6.35)	.470 (11.94)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
56,000	1.350 (34.29)	1.460 (37.08)	.225 (5.72)	.420 (10.67)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
62,000	1.360 (34.54)	1.470 (37.34)	.250 (6.35)	.450 (11.43)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
68,000	1.370 (34.80)	1.480 (37.59)	.260 (6.60)	.470 (11.94)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
75,000	1.360 (34.54)	1.470 (37.34)	.240 (6.10)	.440 (11.18)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
82,000	1.370 (34.80)	1.480 (37.59)	.310 (7.87)	.460 (11.68)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
91,000	1.390 (35.31)	1.500 (38.10)	.340 (8.64)	.500 (12.70)	.940 (23.88)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Case: Dipped.

Capacitance value: See table II.

Capacitance tolerance: See table II.

Symbol	Capacitance tolerance
D	±.5 pF
F	±1%
G	±2%
J	±5%

DC rated voltage: See table II.

Operating temperature range: See table II.

Symbol	Temperature range
O	-55°C to +125°C
P	-55°C to +150°C

Vibration grade: Grade 3 (10 to 2,000 Hz).

Characteristic: See table II.

Symbol	Temperature coefficient (ppm/°C)	Capacitance drift	Capacitance values
C	-200 to +200	±(0.5 percent + 0.1 pF)	1 pF thru 18 pF
E	-20 to +100	±(0.1 percent + 0.1 pF)	20 pF thru 82 pF
F	0 to +70	±(0.05 percent + 0.1 pF)	91 pF and greater

Dielectric withstanding voltage: Method 301 of MIL-STD-202; 200 percent of rated dc voltage for not less than 1 second nor more than 5 seconds.

* Barometric pressure, qualification only: MIL-STD-202, Method 105, test condition D; 100,000 feet. Test potential, 100 percent of rated dc voltage for 500 volt styles CM04 and CM09; 150 percent for lesser voltage ratings and all other styles.

Insulation resistance: MIL-STD-202, Method 302, test condition A.

Capacitance rating	Minimum insulation resistance
	At 25°C
0 to 10,000 pF	100,000 megohms
10,000 pF and greater	1,000 megohm-microfarads 1/
	At 125°C
0 to 3,300 pF	10,000 megohms minimum
3,300 pF and greater	33 megohm-microfarads 1/
	At 150°C
0 to 1,500 pF	5,000 megohms
1,500 pF and greater	7.5 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Dissipation factor: See MIL-C-5.

Capacitance: Method 305 of MIL-STD-202.

Vibration: Method 204, test condition D, MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

Thermal shock: Method 107 of MIL-STD-202, condition A, except the high temperature shall be as follows:

Symbol O: +125°C.

Symbol P: +150°C.

Immersion: Method 104, test condition B, MIL-STD-202.

Dielectric withstanding voltage: Meet initial requirement.

Insulation resistance: At least 30 percent of initial requirement.

Dissipation factor: Not greater than 150 percent of initial requirement.

Capacitance change: Shall not exceed ±1 percent of nominal value of 1 pF, whichever is greater.

Shock (specified pulse): Method 213, test condition I (100G), MIL-STD-202.

Solderability: Method 208, MIL-STD-202.

Terminal strength:

Pull test: Capacitor held by one terminal and a 5 pound load gradually applied to other terminal and maintained for at least 5 seconds.

Twist test (straight wire leads only): 5 alternate 360° rotations.

Bend test (crimped wire leads only): 90° two directions from vertical.

Moisture resistance: Method 106 of MIL-STD-202:

Dielectric withstanding voltage: Initial requirement.

Insulation resistance: At least 30 percent of initial requirement.

Dissipation factor: Not greater than 150 percent of initial requirement.

Capacitance change: Shall not exceed ±1 percent of nominal value of 1 pF, whichever is greater.

Temperature coefficient and capacitance drift: Within the limits specified for the applicable characteristic.

Low temperature storage and life: 48 hours at -55 +0°C, -2°C immediately followed by qualification or performance test, as applicable.

Qualification test: 2,000 hours at applicable high test temperature with 150 percent of rated dc voltage applied.

Dielectric withstanding voltage: Initial requirement.

Insulation resistance: Initial requirement.

Dissipation factor: Not greater than 150 percent of initial requirement.

Capacitance change: Shall not exceed ±1 percent of nominal value or 1 pF, whichever is greater.

Performance check: Conditions and requirements in accordance with qualification test except that test duration shall be 250 hours.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

Continuation test: Units that have been subjected to the 250 hour test shall be continued for an additional 1,750 hours and meet the requirements for the qualification test.

Qualification inspection: Qualification inspection (Group A) is required.

TABLE II. Type designations.

Styles CM04 and CM09				
Type designation 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
CM--CD010D-3	1	500	OP	D
CM--CD050D-3	5	500	OP	D
CM--CD060D-3	6	500	OP	D
CM--CD070D-3	7	500	OP	D
CM--CD080D-3	8	500	OP	D
CM--CD100D-3	10	500	OP	D
CM--CD120J-3	12	500	OP	J
CM--CD150J-3	15	500	OP	J
CM--CD180J-3	18	500	OP	J
CM--ED200J-3	20	500	OP	J
CM--ED220J-3	22	500	OP	J
CM--ED240J-3	24	500	OP	J
CM--ED270--3	27	500	OP	GJ
CM--ED300--3	30	500	OP	GJ
CM--ED330--3	33	500	OP	GJ
CM--ED360--3	36	500	OP	GJ
CM--ED390--3	39	500	OP	GJ
CM--ED430--3	43	500	OP	GJ
CM--ED470--3	47	500	OP	GJ
CM--ED510--3	51	500	OP	FGJ
CM--ED560--3	56	500	OP	FGJ
CM--ED620--3	62	500	OP	FGJ
CM--ED680--3	68	500	OP	FGJ
CM--ED750--3	75	500	OP	FGJ
CM--ED820--3	82	500	OP	FGJ
CM--FD910--3	91	500	OP	FGJ
CM--FD101--3	100	500	OP	FGJ
CM--FD111--3	110	500	OP	FGJ
CM--FD121--3	120	500	OP	FGJ
CM--FD131--3	130	500	OP	FGJ
CM--FD151--3	150	500	OP	FGJ
CM--FD161--3	160	500	OP	FGJ
CM--FD181--3	180	500	OP	FGJ
CM--FD201--3	200	500	OP	FGJ
CM--FD221--3	220	500	OP	FGJ
CM--FD241--3	240	500	OP	FGJ
CM--FC271--3	270	300	OP	FGJ
CM--FC301--3	300	300	OP	FGJ
CM--FA331--3	330	100	OP	FGJ
CM--FA361--3	360	100	OP	FGJ
CM--FA391--3	390	100	OP	FGJ

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE II. Type designations - Continued.

Styles CM05 and CM10				
Type designation 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
CM--CD010D-3	1	500	OP	D
CM--CD050D-3	5	500	OP	D
CM--CD060D-3	6	500	OP	D
CM--CD070D-3	7	500	OP	D
CM--CD080D-3	8	500	OP	D
CM--CD100D-3	10	500	OP	D
CM--CD120J-3	12	500	OP	J
CM--CD150J-3	15	500	OP	J
CM--CD180J-3	18	500	OP	J
CM--ED200J-3	20	500	OP	J
CM--ED220J-3	22	500	OP	J
CM--ED240J-3	24	500	OP	J
CM--ED270--3	27	500	OP	GJ
CM--ED300--3	30	500	OP	GJ
CM--ED330--3	33	500	OP	GJ
CM--ED360--3	36	500	OP	GJ
CM--ED390--3	39	500	OP	GJ
CM--ED430--3	43	500	OP	GJ
CM--ED470--3	47	500	OP	GJ
CM--ED510--3	51	500	OP	FGJ
CM--ED560--3	56	500	OP	FGJ
CM--ED620--3	62	500	OP	FGJ
CM--ED680--3	68	500	OP	FGJ
CM--ED750--3	75	500	OP	FGJ
CM--ED820--3	82	500	OP	FGJ
CM--FD910--3	91	500	OP	FGJ
CM--FD101--3	100	500	OP	FGJ
CM--FD111--3	110	500	OP	FGJ
CM--FD121--3	120	500	OP	FGJ
CM--FD131--3	130	500	OP	FGJ
CM--FD151--3	150	500	OP	FGJ
CM--FD161--3	160	500	OP	FGJ
CM--FD181--3	180	500	OP	FGJ
CM--FD201--3	200	500	OP	FGJ
CM--FD221--3	220	500	OP	FGJ
CM--FD241--3	240	500	OP	FGJ
CM--FD271--3	270	500	OP	FGJ
CM--FD301--3	300	500	OP	FGJ
CM--FD331--3	330	500	OP	FGJ
CM--FD361--3	360	500	OP	FGJ
CM--FD391--3	390	500	OP	FGJ

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE II. Type designations - Continued.

Styles CM06 and CM11				
Type designation 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
CM--FD431--3	430	500	OP	FGJ
CM--FD471--3	470	500	OP	FGJ
CM--FD511--3	510	500	OP	FGJ
CM--FD561--3	560	500	OP	FGJ
CM--FD621--3	620	500	OP	FGJ
CM--FD681--3	680	500	OP	FGJ
CM--FD751--3	750	500	OP	FGJ
CM--FD821--3	820	500	OP	FGJ
CM--FD911--3	910	500	OP	FGJ
CM--FD102--3	1,000	500	OP	FGJ
CM--FD112--3	1,100	500	OP	FGJ
CM--FD122--3	1,200	500	OP	FGJ
CM--FD132--3	1,300	500	OP	FGJ
CM--FD152--3	1,500	500	OP	FGJ
CM--FD162--3	1,600	500	OP	FGJ
CM--FD182--3	1,800	500	OP	FGJ
CM--FD202--3	2,000	500	OP	FGJ
CM--FD222--3	2,200	500	OP	FGJ
CM--FD242--3	2,400	500	OP	FGJ
CM--FD272--3	2,700	500	OP	FGJ
CM--FD302--3	3,000	500	OP	FGJ
CM--FD332--3	3,300	500	OP	FGJ
CM--FD362--3	3,600	500	OP	FGJ
CM--FD392--3	3,900	500	OP	FGJ
CM--FD432--3	4,300	500	OP	FGJ
CM--FD472--3	4,700	500	OP	FGJ
CM07 and CM12				
CM--FD512--3	5,100	500	OP	FGJ
CM--FD562--3	5,600	500	OP	FGJ
CM--FD622--3	6,200	500	OP	FGJ
CM--FD682--3	6,800	500	OP	FGJ
CM--FD752--3	7,500	500	OP	FGJ
CM--FD822--3	8,200	500	OP	FGJ
CM--FD912--3	9,100	500	OP	FGJ
CM--FD103--3	10,000	500	OP	FGJ
CM--FD113--3	11,000	500	OP	FGJ
CM--FD123--3	12,000	500	OP	FGJ
CM--FD133--3	13,000	500	OP	FGJ
CM--FD153--3	15,000	500	OP	FGJ
CM--FD163--3	16,000	500	OP	FGJ
CM--FD183--3	18,000	500	OP	FGJ
CM--FD203--3	20,000	500	OP	FGJ

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.

TABLE II. Type designations - Continued.

Styles CM08 and CM13				
Type designation 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
CM--FD223--3	22,000	500	OP	FGJ
CM--FD243--3	24,000	500	OP	FGJ
CM--FD273--3	27,000	500	OP	FGJ
CM--FD303--3	30,000	500	OP	FGJ
CM--FD333--3	33,000	500	OP	FGJ
CM--FD363--3	36,000	500	OP	FGJ
CM--FD393--3	39,000	500	OP	FGJ
CM--FD433--3	43,000	500	OP	FGJ
CM--FD473--3	47,000	500	OP	FGJ
CM--FD513--3	51,000	500	OP	FGJ
CM--FC563--3	56,000	300	OP	FGJ
CM--FC623--3	62,000	300	OP	FGJ
CM--FC683--3	68,000	300	OP	FGJ
CM--FA753--3	75,000	100	OP	FGJ
CM--FA823--3	82,000	100	OP	FGJ
CM--FA913--3	91,000	100	OP	FGJ

1/ Complete type designation, where applicable, will include additional letter symbols to indicate the style, capacitance tolerance, and operating temperature range.

Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 11
DLA - CC

Review activities:
Navy - AS, CG, MC, OS, SH
Air Force - 19

Preparing activity:
DLA - CC

(Project 5910-2117)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:52Z
Check the source to verify that this is the current version before use.