INCH-POUND
MIL-PRF-5/18G
25 November 2022
SUPERSEDING
MIL-C-5/18F
29 March 2013


PERFORMANCE SPECIFICATION SHEET

CAPACITOR, FIXED, MICA DIELECTRIC, STYLES CM04, CM05 CM06, CM07, CM08, CM09, CM10, CM11, CM12, AND CM13


INACTIVE FOR NEW DESIGN AFTER
21 DECEMBER 1970. USE MIL-PRF-39001/5.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the capacitors described herein shall consist of this specification sheet and MIL-PRF-5.

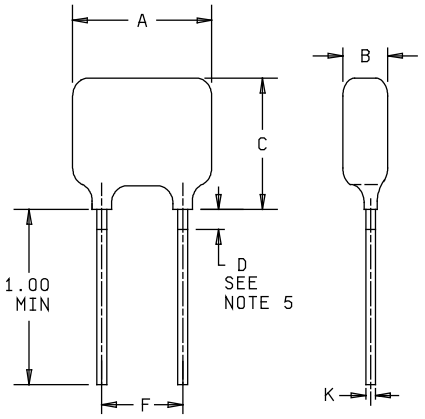

STRAIGHT LEAD
Styles CM04, CM05,
CM06, CM07, & CM08

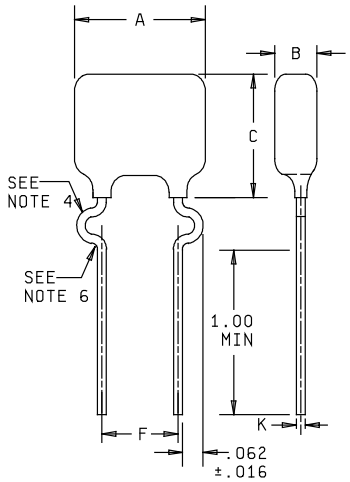

CRIMPED LEAD
Styles CM09, CM10
CM11, CM12, & CM13

NOTES:
1. Dimensions are in inches (see table I).
2. Millimeters are in millimeters and are in parentheses (see table I).
3. Metric equivalents are given for general information only.
4. Magnitude of nicks, pinches or die marks appearing on the leads shall not exceed 1/5 of the wire diameter.
5. The “D” dimension may not be solderable as it may be covered by a clear epoxy or resinous coating.
6. No resinous phenolic or clear epoxy coating on leads below crimp.

Inches	mm
.016	0.41
.062	1.57
1.00	25.40

FIGURE 1. Styles, straight lead and crimped lead.

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release. Distribution is unlimited.
FSC 5910

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Capacitance range (pF)	A		B		C, max		D, max	F	K, Dia. ± .002 (0.05)	
	Min	Max	Min	Max	Straight lead styles	Crimp lead styles	Straight lead styles only	Spacing ± .031 (0.79)	Straight lead styles	Crimp lead styles
Styles CM04 and CM09										
1 to 24, incl	.275 (6.99)	.360 (9.14)	.080 (2.03)	.190 (4.83)	.330 (8.38)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
27	.275 (6.99)	.370 (9.40)	.080 (2.03)	.190 (4.83)	.330 (8.38)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
30 to 68, incl	.275 (6.99)	.370 (9.40)	.080 (2.03)	.190 (4.83)	.340 (8.64)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
75	.275 (6.99)	.370 (9.40)	.090 (2.29)	.200 (5.08)	.340 (8.64)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
82	.275 (6.99)	.370 (9.40)	.090 (2.29)	.200 (5.08)	.350 (8.89)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
91 to 100, incl	.275 (6.99)	.370 (9.40)	.090 (2.29)	.200 (5.08)	.350 (8.89)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
110 to 120, incl	.275 (6.99)	.380 (9.65)	.090 (2.29)	.200 (5.08)	.350 (8.89)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
130	.275 (6.99)	.380 (9.65)	.090 (2.29)	.200 (5.08)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
150 to 160, incl	.275 (6.99)	.380 (9.65)	.100 (2.54)	.210 (5.33)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
180	.275 (6.99)	.390 (9.91)	.100 (2.54)	.210 (5.33)	.370 (9.40)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
200 to 390, incl	.275 (6.99)	.390 (9.91)	.110 (2.79)	.220 (5.59)	.380 (9.65)	.500 (12.70)	.125 (3.18)	.150 (3.81)	.016 (0.36)	.020 (0.51)
Styles CM05 and CM10										
1 to 62, incl	.390 (9.91)	.450 (11.43)	.080 (2.03)	.170 (4.32)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
68 to 82, incl	.390 (9.91)	.450 (11.43)	.080 (2.03)	.180 (4.57)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
91 to 100, incl	.390 (9.91)	.460 (11.68)	.080 (2.03)	.180 (4.57)	.360 (9.14)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
110 to 130, incl	.390 (9.91)	.460 (11.68)	.080 (2.03)	.180 (4.57)	.370 (9.40)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
150 to 180, incl	.390 (9.91)	.460 (11.68)	.090 (2.29)	.190 (4.83)	.370 (9.40)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
200	.390 (9.91)	.460 (11.68)	.090 (2.29)	.190 (4.83)	.380 (9.65)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
220 to 240, incl	.390 (9.91)	.460 (11.68)	.100 (2.54)	.200 (5.08)	.380 (9.65)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
270 to 330, incl	.390 (9.91)	.470 (11.94)	.100 (2.54)	.210 (5.33)	.390 (9.91)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
360 to 390, incl	.390 (9.91)	.470 (11.94)	.110 (2.79)	.220 (5.59)	.400 (10.16)	.500 (12.70)	.125 (3.18)	.225 (5.72)	.025 (0.64)	.032 (0.81)
Styles CM06 and CM11										
430 to 470, incl	.550 (13.97)	.640 (16.26)	.080 (2.03)	.200 (5.08)	.510 (12.95)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
510 to 620, incl	.560 (14.22)	.650 (16.51)	.080 (2.03)	.200 (5.08)	.510 (12.95)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
680 to 910, incl	.560 (14.22)	.650 (16.51)	.080 (2.03)	.210 (5.33)	.510 (12.95)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
1000 to 1100, incl	.560 (14.22)	.650 (16.51)	.080 (2.03)	.220 (5.59)	.520 (13.21)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
1200 to 1300, incl	.570 (14.48)	.660 (16.78)	.090 (2.29)	.220 (5.59)	.520 (13.21)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
1500	.570 (14.48)	.660 (16.78)	.090 (2.29)	.230 (5.84)	.520 (13.21)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
1600	.570 (14.48)	.660 (16.78)	.100 (2.54)	.230 (5.84)	.530 (13.46)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
1800 to 2000, incl	.580 (14.73)	.670 (17.02)	.100 (2.54)	.240 (6.10)	.530 (13.46)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
2200	.580 (14.73)	.670 (17.02)	.110 (2.79)	.250 (6.35)	.530 (13.46)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
2400	.580 (14.73)	.670 (17.02)	.110 (2.79)	.260 (6.60)	.540 (13.72)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
2700	.590 (14.99)	.680 (17.27)	.120 (3.05)	.270 (6.86)	.540 (13.72)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
3000	.590 (14.99)	.680 (17.27)	.130 (3.30)	.280 (7.11)	.550 (13.97)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
3300	.590 (14.99)	.680 (17.27)	.140 (3.56)	.290 (7.37)	.550 (13.97)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
3600	.590 (14.99)	.680 (17.27)	.150 (3.81)	.300 (7.62)	.560 (14.22)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
3900	.590 (14.99)	.690 (17.53)	.150 (3.81)	.310 (7.87)	.560 (14.22)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
4300	.590 (14.99)	.690 (17.53)	.150 (3.81)	.330 (8.38)	.570 (14.48)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
4700	.590 (14.99)	.700 (17.78)	.160 (4.06)	.350 (8.89)	.580 (14.73)	.672 (17.07)	.141 (3.58)	.350 (8.89)	.032 (0.81)	.032 (0.81)
Styles CM07 and CM12										
5100	.680 (17.27)	.780 (19.81)	.150 (3.81)	.280 (7.11)	.860 (21.84)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
5600 to 6200, incl	.680 (17.27)	.780 (19.81)	.150 (3.81)	.290 (7.37)	.870 (22.10)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
6800	.680 (17.27)	.780 (19.81)	.150 (3.81)	.300 (7.62)	.870 (22.10)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
7500	.690 (17.53)	.790 (20.07)	.150 (3.81)	.310 (7.87)	.880 (22.35)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
8200	.690 (17.53)	.790 (20.07)	.150 (3.81)	.320 (8.13)	.880 (22.35)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
9100	.690 (17.53)	.790 (20.07)	.150 (3.81)	.330 (8.38)	.880 (22.35)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
10,000	.700 (17.78)	.800 (20.32)	.200 (5.08)	.340 (8.64)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
11,000	.700 (17.78)	.800 (20.32)	.200 (5.08)	.350 (8.89)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
12,000	.700 (17.78)	.800 (20.32)	.200 (5.08)	.360 (9.14)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
13,000	.710 (18.03)	.810 (20.57)	.200 (5.08)	.370 (9.40)	.890 (22.61)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
15,000	.710 (18.03)	.810 (20.57)	.250 (6.35)	.390 (9.91)	.900 (22.86)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
16,000	.720 (18.29)	.820 (20.83)	.250 (6.35)	.410 (10.41)	.900 (22.86)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
18,000	.720 (18.29)	.820 (20.83)	.250 (6.35)	.430 (10.92)	.910 (23.11)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)
20,000	.730 (18.54)	.830 (21.08)	.250 (6.35)	.450 (11.43)	.920 (23.37)	1.031 (26.19)	.141 (3.58)	.425 (10.80)	.040 (1.02)	.040 (1.02)

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions - Continued.

Capacitance range (pF)	A		B		C, max		D, max	F	K, Dia. ± .002 (0.05)	
	Min	Max	Min	Max	Straight lead styles	Crimp lead styles	Straight lead styles only	Spacing ± .031 (0.79)	Straight lead styles	Crimp lead styles
Styles CM08 and CM13										
22,000	1.300 (33.02)	1.420 (36.07)	.180 (4.57)	.310 (7.87)	.880 (22.35)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
24,000	1.310 (33.27)	1.430 (36.32)	.180 (4.57)	.320 (8.13)	.880 (22.35)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
27,000	1.320 (33.53)	1.430 (36.32)	.180 (4.57)	.330 (8.38)	.880 (22.35)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
30,000	1.330 (33.78)	1.440 (36.58)	.180 (4.57)	.350 (8.89)	.890 (22.61)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
33,000	1.330 (33.78)	1.440 (36.58)	.180 (4.57)	.360 (9.14)	.890 (22.61)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
36,000	1.340 (34.04)	1.450 (36.83)	.180 (4.57)	.380 (9.65)	.900 (22.86)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
39,000	1.340 (34.04)	1.450 (36.83)	.220 (5.59)	.400 (10.16)	.900 (22.86)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
43,000	1.350 (34.29)	1.460 (37.08)	.225 (5.72)	.420 (10.67)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
47,000	1.360 (34.54)	1.470 (37.34)	.250 (6.35)	.450 (11.43)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
51,000	1.370 (34.80)	1.480 (37.59)	.250 (6.35)	.470 (11.94)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
56,000	1.350 (34.29)	1.460 (37.08)	.225 (5.72)	.420 (10.67)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
62,000	1.360 (34.54)	1.470 (37.34)	.250 (6.35)	.450 (11.43)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
68,000	1.370 (34.80)	1.480 (37.59)	.260 (6.60)	.470 (11.94)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
75,000	1.360 (34.54)	1.470 (37.34)	.240 (6.10)	.440 (11.18)	.910 (23.11)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
82,000	1.370 (34.80)	1.480 (37.59)	.310 (7.87)	.460 (11.68)	.920 (23.37)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)
91,000	1.390 (35.31)	1.500 (38.10)	.340 (8.64)	.500 (12.70)	.940 (23.88)	1.062 (26.97)	.141 (3.58)	1.050 (26.67)	.040 (1.02)	.040 (1.02)

REQUIREMENTS:

Dimensions: See figure 1 and table I.

Case: Dipped.

Capacitance value: See table II.

Capacitance tolerance: See table II.

Symbol	Capacitance tolerance
D	±.5 pF
F	±1%
G	±2%
J	±5%

DC rated voltage: See table II.

Operating temperature range: See table II.

Symbol	Temperature range
O	-55°C to +125°C
P	-55°C to +150°C

Vibration grade: Grade 3 (10 to 2,000 Hz).

Characteristic: See table II.

Symbol	Temperature coefficient (ppm/°C)	Capacitance drift	Capacitance values
C	-200 to +200	±(0.5 percent + 0.1 pF)	1 pF thru 18 pF
E	-20 to +100	±(0.1 percent + 0.1 pF)	20 pF thru 82 pF
F	0 to +70	±(0.05 percent + 0.1 pF)	91 pF and greater

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

Dielectric withstanding voltage: MIL-STD-202-301; 200 percent of rated dc voltage for not less than 1 second nor more than 5 seconds.

Barometric pressure, qualification only: MIL-STD-202-105, test condition D; 100,000 feet. Test potential, 100 percent of rated dc voltage for 500 volt styles CM04 and CM09; 150 percent for lesser voltage ratings and all other styles.

Insulation resistance: MIL-STD-202-302, test condition A.

Capacitance rating	Minimum insulation resistance
	At +25°C
0 to 10,000 pF	100,000 megohms
10,000 pF and greater	1,000 megohm-microfarads 1/
	At +125°C
0 to 3,300 pF	10,000 megohms minimum
3,300 pF and greater	33 megohm-microfarads 1/
	At +150°C
0 to 1,500 pF	5,000 megohms
1,500 pF and greater	7.5 megohm-microfarads 1/

1/ Product obtained by multiplying the capacitance in microfarads by the insulation resistance in megohms.

Dissipation factor: See MIL-PRF-5.

Capacitance: MIL-STD-202-305.

Vibration: MIL-STD-202-204, test condition D.

Thermal shock: MIL-STD-202-107, condition A, except the high temperature shall be as follows:

Symbol O: +125°C.

Symbol P: +150°C.

Immersion: MIL-STD-202-104, test condition B.

Dielectric withstanding voltage: Meet initial requirement.

Insulation resistance: At least 30 percent of initial requirement.

Dissipation factor: Not greater than 150 percent of initial requirement.

Capacitance change: Shall not exceed ±1 percent of nominal value of 1 pF, whichever is greater.

Shock (specified pulse): MIL-STD-202-213, test condition I (100G).

Solderability: MIL-STD-202-208.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

Terminal strength:

Pull test: Capacitor held by one terminal and a 5 pound load gradually applied to other terminal and maintained for at least 5 seconds.

Twist test (straight wire leads only): 5 alternate 360° rotations.

Bend test (crimped wire leads only): 90° two directions from vertical.

Moisture resistance: MIL-STD-202-106:

Dielectric withstanding voltage: Initial requirement.

Insulation resistance: At least 30 percent of initial requirement.

Dissipation factor: Not greater than 150 percent of initial requirement.

Capacitance change: Shall not exceed ±1 percent of nominal value of 1 pF, whichever is greater.

Temperature coefficient and capacitance drift: Within the limits specified for the applicable characteristic.

Low temperature storage and life: 48 hours at -55 +0°C, -2°C immediately followed by qualification or performance test, as applicable.

Qualification test: 2,000 hours at applicable high test temperature with 150 percent of rated dc voltage applied.

Dielectric withstanding voltage: Initial requirement.

Insulation resistance: Initial requirement.

Dissipation factor: Not greater than 150 percent of initial requirement.

Capacitance change: Shall not exceed ± 1 percent of nominal value or 1 pF, whichever is greater.

Performance check: Conditions and requirements in accordance with qualification test except that test duration shall be 250 hours.

Continuation test: Units that have been subjected to the 250 hour test shall be continued for an additional 1,750 hours and meet the requirements for the qualification test.

Qualification inspection: Qualification inspection (Group A) is required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE II. Style CM04, CM05, CM06, CM07, CM08, CM09, CM10, CM11, CM12, and CM13 capacitors.

Part or identifying number (PIN) 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
Styles CM04 and CM09				
CM--CD010D-3	1	500	O,P	D
CM--CD050D-3	5	500	O,P	D
CM--CD060D-3	6	500	O,P	D
CM--CD070D-3	7	500	O,P	D
CM--CD080D-3	8	500	O,P	D
CM--CD100D-3	10	500	O,P	D
CM--CD120J-3	12	500	O,P	J
CM--CD150J-3	15	500	O,P	J
CM--CD180J-3	18	500	O,P	J
CM--ED200J-3	20	500	O,P	J
CM--ED220J-3	22	500	O,P	J
CM--ED240J-3	24	500	O,P	J
CM--ED270--3	27	500	O,P	G,J
CM--ED300--3	30	500	O,P	G,J
CM--ED330--3	33	500	O,P	G,J
CM--ED360--3	36	500	O,P	G,J
CM--ED390--3	39	500	O,P	G,J
CM--ED430--3	43	500	O,P	G,J
CM--ED470--3	47	500	O,P	G,J
CM--ED510--3	51	500	O,P	F,G,J
CM--ED560--3	56	500	O,P	F,G,J
CM--ED620--3	62	500	O,P	F,G,J
CM--ED680--3	68	500	O,P	F,G,J
CM--ED750--3	75	500	O,P	F,G,J
CM--ED820--3	82	500	O,P	F,G,J
CM--FD910--3	91	500	O,P	F,G,J
CM--FD101--3	100	500	O,P	F,G,J
CM--FD111--3	110	500	O,P	F,G,J
CM--FD121--3	120	500	O,P	F,G,J
CM--FD131--3	130	500	O,P	F,G,J
CM--FD151--3	150	500	O,P	F,G,J
CM--FD161--3	160	500	O,P	F,G,J
CM--FD181--3	180	500	O,P	F,G,J
CM--FD201--3	200	500	O,P	F,G,J
CM--FD221--3	220	500	O,P	F,G,J
CM--FD241--3	240	500	O,P	F,G,J
CM--FC271--3	270	300	O,P	F,G,J
CM--FC301--3	300	300	O,P	F,G,J
CM--FA331--3	330	100	O,P	F,G,J
CM--FA361--3	360	100	O,P	F,G,J
CM--FA391--3	390	100	O,P	F,G,J

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE II. Style CM04, CM05, CM06, CM07, CM08, CM09, CM10, CM11, CM12, and CM13 capacitors - Continued.

PIN 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
Styles CM05 and CM10				
CM--CD010D-3	1	500	O,P	D
CM--CD050D-3	5	500	O,P	D
CM--CD060D-3	6	500	O,P	D
CM--CD070D-3	7	500	O,P	D
CM--CD080D-3	8	500	O,P	D
CM--CD100D-3	10	500	O,P	D
CM--CD120J-3	12	500	O,P	J
CM--CD150J-3	15	500	O,P	J
CM--CD180J-3	18	500	O,P	J
CM--ED200J-3	20	500	O,P	J
CM--ED220J-3	22	500	O,P	J
CM--ED240J-3	24	500	O,P	J
CM--ED270--3	27	500	O,P	G,J
CM--ED300--3	30	500	O,P	G,J
CM--ED330--3	33	500	O,P	G,J
CM--ED360--3	36	500	O,P	G,J
CM--ED390--3	39	500	O,P	G,J
CM--ED430--3	43	500	O,P	G,J
CM--ED470--3	47	500	O,P	G,J
CM--ED510--3	51	500	O,P	F,G,J
CM--ED560--3	56	500	O,P	F,G,J
CM--ED620--3	62	500	O,P	F,G,J
CM--ED680--3	68	500	O,P	F,G,J
CM--ED750--3	75	500	O,P	F,G,J
CM--ED820--3	82	500	O,P	F,G,J
CM--FD910--3	91	500	O,P	F,G,J
CM--FD101--3	100	500	O,P	F,G,J
CM--FD111--3	110	500	O,P	F,G,J
CM--FD121--3	120	500	O,P	F,G,J
CM--FD131--3	130	500	O,P	F,G,J
CM--FD151--3	150	500	O,P	F,G,J
CM--FD161--3	160	500	O,P	F,G,J
CM--FD181--3	180	500	O,P	F,G,J
CM--FD201--3	200	500	O,P	F,G,J
CM--FD221--3	220	500	O,P	F,G,J
CM--FD241--3	240	500	O,P	F,G,J
CM--FD271--3	270	500	O,P	F,G,J
CM--FD301--3	300	500	O,P	F,G,J
CM--FD331--3	330	500	O,P	F,G,J
CM--FD361--3	360	500	O,P	F,G,J
CM--FD391--3	390	500	O,P	F,G,J

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE II. Style CM04, CM05, CM06, CM07, CM08, CM09, CM10, CM11, CM12, and CM13 capacitors - Continued.

PIN 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
Styles CM06 and CM11				
CM--FD431--3	430	500	O,P	F,G,J
CM--FD471--3	470	500	O,P	F,G,J
CM--FD511--3	510	500	O,P	F,G,J
CM--FD561--3	560	500	O,P	F,G,J
CM--FD621--3	620	500	O,P	F,G,J
CM--FD681--3	680	500	O,P	F,G,J
CM--FD751--3	750	500	O,P	F,G,J
CM--FD821--3	820	500	O,P	F,G,J
CM--FD911--3	910	500	O,P	F,G,J
CM--FD102--3	1,000	500	O,P	F,G,J
CM--FD112--3	1,100	500	O,P	F,G,J
CM--FD122--3	1,200	500	O,P	F,G,J
CM--FD132--3	1,300	500	O,P	F,G,J
CM--FD152--3	1,500	500	O,P	F,G,J
CM--FD162--3	1,600	500	O,P	F,G,J
CM--FD182--3	1,800	500	O,P	F,G,J
CM--FD202--3	2,000	500	O,P	F,G,J
CM--FD222--3	2,200	500	O,P	F,G,J
CM--FD242--3	2,400	500	O,P	F,G,J
CM--FD272--3	2,700	500	O,P	F,G,J
CM--FD302--3	3,000	500	O,P	F,G,J
CM--FD332--3	3,300	500	O,P	F,G,J
CM--FD362--3	3,600	500	O,P	F,G,J
CM--FD392--3	3,900	500	O,P	F,G,J
CM--FD432--3	4,300	500	O,P	F,G,J
CM--FD472--3	4,700	500	O,P	F,G,J
Styles CM07 and CM12				
CM--FD512--3	5,100	500	O,P	F,G,J
CM--FD562--3	5,600	500	O,P	F,G,J
CM--FD622--3	6,200	500	O,P	F,G,J
CM--FD682--3	6,800	500	O,P	F,G,J
CM--FD752--3	7,500	500	O,P	F,G,J
CM--FD822--3	8,200	500	O,P	F,G,J
CM--FD912--3	9,100	500	O,P	F,G,J
CM--FD103--3	10,000	500	O,P	F,G,J
CM--FD113--3	11,000	500	O,P	F,G,J
CM--FD123--3	12,000	500	O,P	F,G,J
CM--FD133--3	13,000	500	O,P	F,G,J
CM--FD153--3	15,000	500	O,P	F,G,J
CM--FD163--3	16,000	500	O,P	F,G,J
CM--FD183--3	18,000	500	O,P	F,G,J
CM--FD203--3	20,000	500	O,P	F,G,J

See footnote at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.

TABLE II. Style CM04, CM05, CM06, CM07, CM08, CM09, CM10, CM11, CM12, and CM13 capacitors - Continued.

PIN 1/	Capacitance value (pF)	DC rated voltage (volts)	Operating temperature range	Capacitance tolerances
Styles CM08 and CM13				
CM--FD223--3	22,000	500	O,P	F,G,J
CM--FD243--3	24,000	500	O,P	F,G,J
CM--FD273--3	27,000	500	O,P	F,G,J
CM--FD303--3	30,000	500	O,P	F,G,J
CM--FD333--3	33,000	500	O,P	F,G,J
CM--FD363--3	36,000	500	O,P	F,G,J
CM--FD393--3	39,000	500	O,P	F,G,J
CM--FD433--3	43,000	500	O,P	F,G,J
CM--FD473--3	47,000	500	O,P	F,G,J
CM--FD513--3	51,000	500	O,P	F,G,J
CM--FC563--3	56,000	300	O,P	F,G,J
CM--FC623--3	62,000	300	O,P	F,G,J
CM--FC683--3	68,000	300	O,P	F,G,J
CM--FA753--3	75,000	100	O,P	F,G,J
CM--FA823--3	82,000	100	O,P	F,G,J
CM--FA913--3	91,000	100	O,P	F,G,J

1/ Complete PIN, where applicable, will include additional letter symbols to indicate the style, capacitance tolerance, and operating temperature range.

Referenced documents: In addition to MIL-PRF-5, this document references the following:

MIL-STD-202-104
MIL-STD-202-105
MIL-STD-202-106
MIL-STD-202-107
MIL-STD-202-204
MIL-STD-202-208
MIL-STD-202-213
MIL-STD-202-301
MIL-STD-202-302
MIL-STD-202-305

Changes from previous issue: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - CR
Navy - EC
Air Force - 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5910-2023-003)

Review activities:
Navy - AS, CG, MC, OS, SH
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-15T15:51Z
Check the source to verify that this is the current version before use.