[INCH-POUND]
A-A-52593
February 6, 1996
SUPERSEDING
MIL-S-4083C
11 October 1974

COMMERCIAL ITEM DESCRIPTION

SAW RECIPROCATING, PORTABLE, PNEUMATIC: METAL CUTTING

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This commercial item description (CID) applies to a single type of pneumatic, portable, reciprocating, metal-cutting saw.

2. SALIENT CHARACTERISTICS

2.1 Material. Material shall be selected by the supplier and shall be subject to all provisions of this CID.

2.2 Design and construction. The saw shall consist of air motor, reciprocating assembly, housing, handle, and blade chuck. The air motor shall be either reciprocating or rotary type. The metal cutting saw design and construction shall be representative of a standard commercial saw with a proven history of durability and performance, which also meets the requirements of this CID.

2.2.1 Handle. The saw shall be provided with a pistol-grip-type handle located to permit one-hand operation of the saw. The handle shall be tapped with 1/4 - 18 NPT to receive the air coupling nipple.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000

FSC 5130

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.2.2 Control lever. An instant-release-type, air-control lever or trigger shall be provided and located in the handle to permit operation of the saw and the air-control lever at the same time with one hand. The control lever shall provide infinite speed control from stop to full rated speed.

2.2.3 Air coupling nipple. A male quick-disconnect coupling nipple conforming to figure 1 shall be provided. The thread size shall be 1/4-18 NPT. The nipple shall be capable of operating at pressures up to 150 pounds per square inch (psi). The nipple shall interface with military type II, class C female couplings conforming to MIL-C-4109.

2.2.4 Stroke. The length of the stroke shall be not more than 1.75 in. or less than 0.25 in. at the no-load speed.

2.2.5 Dimensions. The overall length of the saw shall be not more than 14.5 in. excluding the blade.

2.2.6 Weight. The weight of the saw excluding the blade, shall be not more than 5.5 pounds (lbs).

2.3 Performance. The saw shall cut 0.25 in. 6061-T6 aluminum plate at an average rate of not less than 3 in./min at the applicable cutting strokes per minute (min) and air consumption as specified in table I.

TABLE I. Performance characteristics.

Type air motor	Strokes per minute (minimum)	Air consumption (maximum (cfm))
Reciprocating	900	15 at 85 ±5 psi
Rotary	750	25 at 85 ±5 psi

2.4 Air motor.

2.4.1 Reciprocating type. The reciprocating air motor shall be double-acting and shall transmit power directly to the reciprocating shaft.

2.4.1.1 Reciprocating shaft. The reciprocating shaft shall be attached to the air motor to form the reciprocating mechanism. The shaft shall have splines or flats to prevent rotation in the housing.

2.4.2 Rotary air motor. The rotary air motor shall be of the multivane type and shall transmit power to the reciprocating shaft through a rotary cam and positive acting cam follower.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

2.4.2.1 Reciprocating mechanism. The reciprocating mechanism shall consist of a rotary cam, cam follower, and reciprocating shaft. Cam follower and reciprocating shaft shall convert the rotary action of air motor to reciprocating action for the saw blade. The rotary cam shall be supported at each end with sealed-for-life bearings. The reciprocating shaft shall have splines or flats to prevent rotation in the housing.

2.5 Lubrication. The air motor shall be lubricated through a standard air line lubricator. The reciprocating mechanism shall be provided with a means of flood lubrication of the cam and cam follower.

2.6 Identification marking. The required marking for the saw shall be limited to the supplier's name or trademark, model, serial number and stock number. Identification plates shall be made of a material suitable to withstand the environmental conditions expected to be experienced during operation and storage at the saw.

3. REGULATORY REQUIREMENTS

3.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable in accordance with paragraph 23.403 of the Federal Acquisition Regulation.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspections (examinations and tests).

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and the product conforms to the producers own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. PACKAGING. Preservation, packing, and marking for the desired level shall be as specified in the contract (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.


6.1 Addresses for obtaining copies of referenced documents.

6.1.1 Government documents. The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Copies of MIL-C-4109 are available from the Standardization Document Order Desk, 700 Robbins Avenue, Building 4D, Philadelphia, PA 19111-5094.

6.2 Ordering data. Acquisition documents must specify the following.

a. Title, number and date of this CID.
b. Issue of DoDISS to be cited in the solicitation.
c. Applicable level of preservation, packing and marking.

6.3 Cross reference data. Pneumatic saws conforming this CID are interchangeable, substitutable with saws of the same part number conforming to MIL-S-4083C.

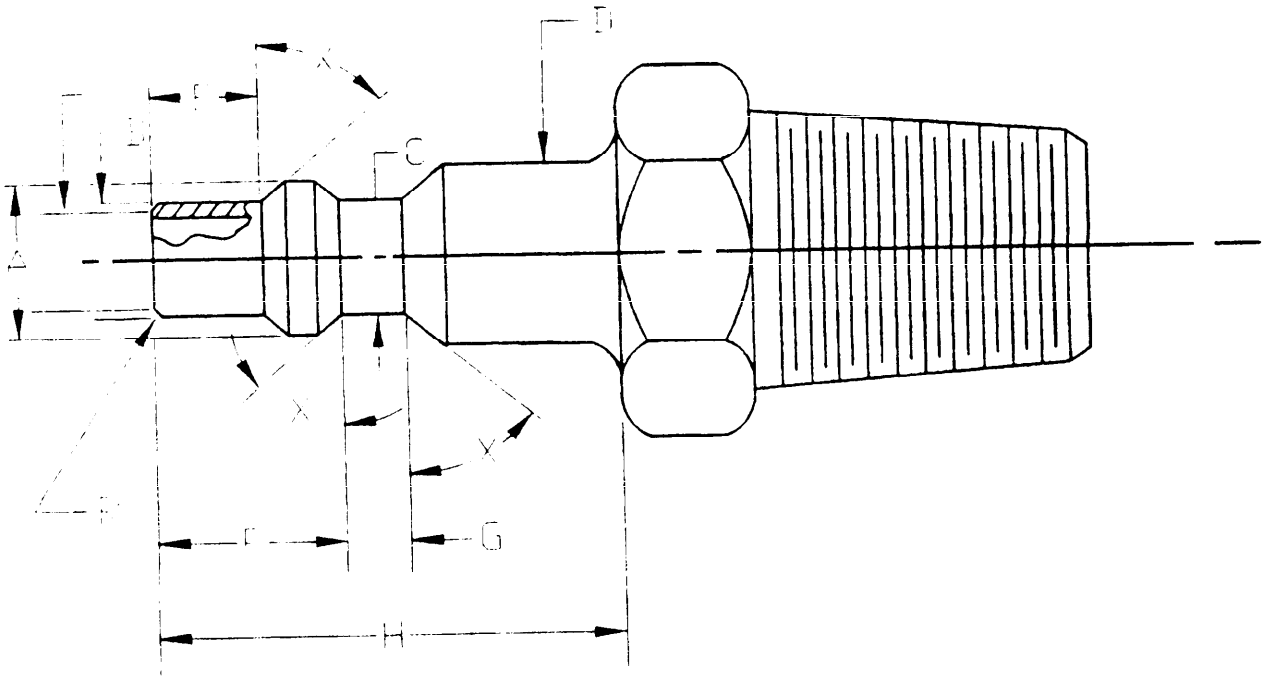

Dimensions (inches)										Deg
A	B	C	D	E	F	G	H	J	R	X
0.655	0.560	0.560	0.655	0.375	0.577	0.109	1.375	0.375	0.015	45

FIGURE 1. Air coupling nipple

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS

Custodians
Army - AT
Navy - YD1
Air Force - 99

Review activity:
Army - GL

CIVIL AGENCY COORDINATING ACTIVITY:
GSA-FSS

Preparing Activity:
Army - AT

(Project 5130-0385)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.