[INCH-POUND]
A-A-52596
February 21.1996
SUPERSEDING
MS39335
24 August 1970

# COMMERCIAL ITEM DESCRIPTION

## BIT, BUTTON, ROCK DRILL, FOR DRIFTER DRILLS

The General Services Administration has authorized the use of this commercial item description (CID) for all federal agencies.

1. SCOPE. This CID covers button bits for use with drifter drills.

## 2. SALIENT CHARACTERISTICS

2.1 Materials. Unless specified herein, the materials used shall be in accordance with manufacturer's material specifications for button bits.

2.2 Design and construction. The button bits shall be in accordance with the requirements of this specification and shall be the manufacturer's standard commercial product (see figure 1).

Beneficial comments, recommendations, additions, deletions clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN AMSTA-TR-E/BLUE. Warren. MI 48397-5000

FSC 3820

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026l0-26T09:13Z
Check the source to verify that this is the current version before use.




| DASH NO. | DIA. A | DIA. B | DIM. C (see note 5) | |
|---|---|---|---|---|
| | | | (R) | (H) |
| -1 | 2.50 | .44 | .61 | .74 |
| -2 | 2.75 | .44 | .61 | .74 |
| -3 | 3.00 | .44 | .61 | .74 |
| -4 | 3.50 | .44 | .61 | .74 |
| -5 | 4.00 | .50 | .70 | .86 |

NOTES:

1. Dimensions are in inches.
2. There shall be a minimum of two blow holes.
3. Minimum load required to remove inserts shall be 4200 pounds (lbs).
4. There shall be a minimum of nine spherical tungsten carbide button inserts of which not less than six inserts shall be located on the gauge circumference.
5. Requirement option for regular (R) or heavy (H) duty bits.
6 Unless otherwise specified, linear tolerance shall be + 0.015 inch.
7. The PIN dash numbers and the prior MS dash numbers are the same.

FIGURE 1. Button bit.

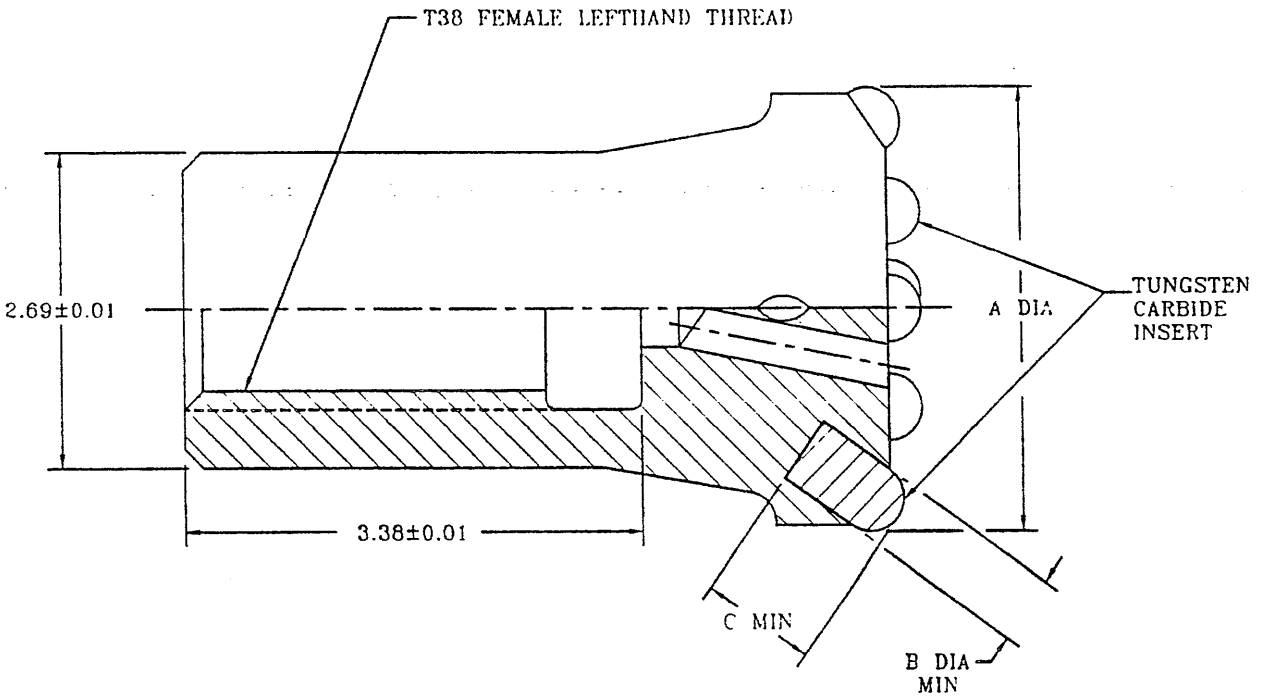

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

2.2.1 Threads. The threads shall be turned parallel to centerline and concentric with 0.01 inch of gauge circumference. Thread portion shall be T38 female left hand thread.

2.2.2 Rock bit. Bit body material shall be thru hardenable alloy steel with hardness throughout of Rh42-45C.

2.3 Identification and marking. Identification and markings of the button bit shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE), the contract number, the part or identification number (PIN) (see 6.2 and 6.3) and the national stock number (NSN).

3. REGULATORY REQUIREMENT. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR.).

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for inspection. The contractor is responsible for the performance of all inspection examinations and tests.

4.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for government acceptance. The government reserves the right to require proof of such conformance prior to the first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

5. PRESERVATION, PACKAGING, PACKING, AND MARKING. Preservation, packaging, packing, and marking shall be as specified in the contract or order (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that maybe helpful, but is not mandatory.)

6.1 Source of documents. The Code of Federal Regulations (CFR) may be obtained from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.



Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

6.2 Aquisition data. Acquisition documents must specify the following

a. Title, number, and date of this CID.
b. Issue of DODISS to be cited in the solicitation.
c. Type, PIN, and quantity of button bits required.
d. Selection of applicable level and packaging requirements.

6.3 Part or identification number (PIN). The PIN to be used for acquisition of button bits for drifter drills are created as follows:




6.4 Cross-reference data. Button bits conforming to this CID are interchangeable/substitutable with button bits conforming to MS39335.

MILITARY INTERESTS:

Custodians:
Army - AT
Navy - MC
Air Force -99

Review Activities:
Air Force -84
DLA - CS

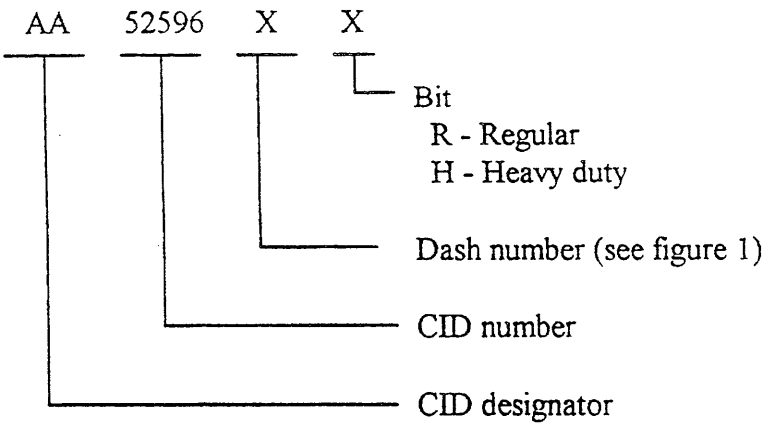CIVIL AGENCY COORDINATION ACTIVITY:
GSA - FSS

Preparing Activity:
Army - AT

(Project 3820-0013)



Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.