[METRIC]
A-A-52599
March 6, 1994
SUPERSEDING
MIL-B-467E
17 November 1988

COMMERCIAL ITEM DESCRIPTION

BREAKERS, PAVING: PNEUMATIC (METRIC)

The General Services Administration has authorized the use of this Commercial Item Description (CID) for all federal agencies.

1. SCOPE. This CID covers manually controlled pneumatic paving breakers, hereinafter called "breakers". The breakers are intended for use in breaking up concrete, brick, asphalt, and macadam and for performing similar demolition work.

2. CLASSIFICATION. Breakers shall be of the following sizes (see 7.1):

a. 27 kilograms (kg) (60 pound (lbs))
b. 36 kg (80 lbs)

3. SALIENT CHARACTERISTICS.

3.1 Materials. Materials shall be in accordance with the manufacturer's material specifications for breakers. Asbestos, cadmium, and radioactive material will not be used in this item. Radioactive material is defined by 1) Title 10, Code of Federal Regulations, Part 40, and 2) Other radioactive material in which the radioactivity is greater than 0.002 microcuries per gram or 0.01 microcuries total activity for the item. The use of recovered material made in compliance with regulatory requirements is acceptable providing that all requirements of this CID are met (see 4.1).

3.1.1 Dissimilar metals. Dissimilar metals shall not be used in extremely close contact or having direct contact with each other unless protected against galvanic corrosion.

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any other data which may improve this document should be sent by letter to: U.S. Army Tank-automotive and Armaments Command, ATTN: AMSTA-TR-E/BLUE, Warren, MI 48397-5000.

FSC 3820

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

3.2 Design and construction. Each breaker shall consist of a backhead equipped with a T-handle with rubber handgrips and throttle, a cylinder assembly, and a fronthead equipped with a chuck for collared-shank tools with a latch type retainer, that shall prevent the accessory tool from becoming accidentally disengaged from the breaker.

3.2.1 Accessories. Unless otherwise specified (see 7.3), the following accessories shall be furnished:

a.	Chisel	- hardness of 54 to 60 Rockwell C
b.	Moil point	- hardness of 54 to 60 Rockwell C
c.	Tamping rod	
d.	Tamping pad	- shall attach to tamping rod

3.2.2 Attachments. Unless otherwise specified (see 7.3), the following attachments shall be furnished:

a.	Spike driver	- shall be capable of driving railroad spikes
b.	Sheeting driver	- used with 36 kg (80 lb) breaker, and shall be adjustable for driving 50.8 millimeter (mm) (2.00 inch (in)) to 76.2 mm (3.00 in) planks

3.3 Chests. When specified (see 7.3), one or both types of chests shall be provided. One chest, known as the "accessory chest", shall be of a size to hold the maintenance tools, accessories, and attachments. The other chest, known as the “breaker chest”, shall be of size to hold the breaker. Each chest shall be weatherproof and capable of being padlocked closed. Each chest shall also be marked according to the contents each shall hold ("accessories" or "breaker").

3.4 Performance. Each size breaker shall operate on compressed air pressures of 482 kilopascals (kPa) (70 pounds per square inch gage (psig)) and 690 kPa (100 psig). The size 27 kg (60 lb) breaker shall break a 127.0 mm (5.00 in) or thicker slab of portland cement concrete and the size 36 kg (80 lb) breaker shall break a 152.4 mm (6.00 in) or thicker slab of portland cement concrete with each slab having a compressive strength of not less than 34450 kPa (5000 pounds per square inch (psi)). Each concrete slab shall be broken into sections having a top surface area not greater than 0.0226 square meters (m^2) (35 square inches (in^2)) without breaker malfunction. damage, scored parts, near of piston or cylinder diameter of more than 0.03 mm (0.001 in), or absence of oil vapor in exhaust air when tested.

3.5 Safety. Each breaker shall be provided with a retainer that will prevent the accessory tool from becoming accidentally disengaged from the breaker. All sharp edges shall be rounded or beveled. All surfaces that are subject to high temperatures shall be covered or protected.

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:13Z
Check the source to verify that this is the current version before use.

3.6 Noise limits. Noise levels shall not exceed 85 decibels (dB) (A) at operating positions during typical load operations. If it can be shown that 85 dB(A) is beyond the state of the art for this equipment, then a hearing protection warning decal shall be placed on the equipment stating that hearing protection is required within (specify) feet. The distance specified shall be the greatest distance at which 85 dB(A) is met. The decal shall be readable to all personnel exposed to the hazard. Warnings shall also be added to applicable manuals requiring hearing protection be worn within the specified distance.

3.7 Protective finish. The parts of the breaker normally painted shall be cleaned, treated, and painted to provide protection against corrosion and deterioration.

3.8 Identification and markings. Identification and markings of the breakers shall be permanent and legible and shall include, as a minimum, the manufacturer's identification code (CAGE), the contract number, the part or identification number (PIN), and the National Stock Number (NSN).

4. REGULATORY REQUIREMENTS.

4.1 Recovered material. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS.

5.1 Responsibility for inspection. The contractor is responsible for all inspections (examinations and tests).

5.2 Contractor certification. The contractor shall certify and maintain substantiating evidence that the product offered meets the salient characteristics of this CID and that the product conforms to the producer's own drawings, specifications, workmanship standards, and quality assurance practices. Items with known defects shall not be submitted for Government acceptance. The Government reserves the right to require proof of such conformance prior to the first delivery and thereafter as maybe otherwise provided for under the provisions of the contract.

6. PACKAGING. Preservation, packing, and marking for the desired level shall be as specified in the contract (see 7.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.

7. NOTES.

(This section contains information of a general or explanatory nature that maybe helpful, but is not mandatory.)

7.1 Part or Identification Number (PIN). The PINs to be used for breakers acquired to this CID are created as follows (see 7.3):

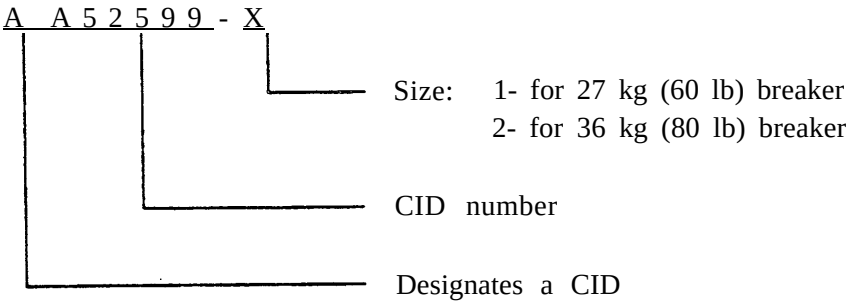

7.2 Addresses for obtaining copes of referenced documents·

7.2.1 Government documents. The Code of Federal Regulations (FAR) is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

7.3 Ordering data. Acquisition documents must specify the following:

a. Title, number, and date of this CID.
b. Issue of Department of Defense Index of Specifications and Standards (DoDISS) to be cited in the solicitation, and if required, the specific issue of individual documents referenced.
c. When accessories are not required.
d. When attachments are not required.
e. When an accessory chest is required.
f. When a breaker chest is required.
g. PIN and quantity of breakers required.
h. Packaging requirements.

7.4 Cross-reference data. Breakers conforming to this CID are interchangeable/substitutable with breakers conforming to MIL-B-467E.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:13Z
Check the source to verify that this is the current version before use.