INCH-POUND

A-A-52116
September 1, 1992

COMMERCIAL ITEM DESCRIPTION

OPENERS, CAN, ELECTRIC, HEAVY DUTY

The General Services Administration has authorized the use of this commercial item description in preference to MIL-O-40155.

1. ABSTRACT

1.1 Abstract. This commercial item description covers the following two types of heavy duty electric can openers:

Type I - Portable
Type II - Table

2. SALIENT CHARACTERISTICS

2.1 Design and construction. The can openers shall be electrically operated and designed to cut tops from circular and elliptical shaped cans of sizes up to and including No. 10 cans. Openers shall consist of a body with a removable feed wheel, cutting wheel, can holding device, can guide, and magnetic lid lifter that holds the can top after it has been cut off. Openers shall include provisions for lubricating bearings and other moving parts.

2.1.1 Body. The type I and type II opener bodies shall be fabricated of cast iron, cast zinc, or 300 series stainless steel or plastic (Type I only). Type I openers shall have a handle as an integral part of the body.

2.1.2 Feed wheel and cutting wheel. Feed wheels and cutting wheels for the type I and type II openers shall be fabricated of tool steel or alloy steel with a through hardness 50 - 58 measured on the Rockwell C scale. The diameter of the feed wheel shall not be less than 7/8 inches; the diameter of

Beneficial comments, recommendations, additions, deletions, clarifications, etc., and any other data which may improve this document should be sent by letter to: Commander, U.S. Army Natick Research, Development, and Engineering Center, ATTN: SATNC-WEE, Natick, MA 01760-5018.

AMSC N/A FSC 7330

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

the cutting wheel shall not be less than 3/4 inches. The cutting wheel shall be mounted on a floating shaft secured to the body of the can opener and shall penetrate the top of the can adjacent to the inside of the can bead by pressure applied by an eccentric lever.

2.1.3 Mounting (Type II). The type II opener shall be furnished with either a vertical shaft and a clamp for mounting to a table or shall have four rubber or composition supports attached to the bottom of the body to prevent movement of the opener when in use. When a shaft and clamp are used, the clamp shaft shall be capable of holding the vertical shaft of the opener at any desired height.

2.2 Electrical characteristics. The openers shall operate on a 120 volts ac, 60hz. When specified (see 5.2.b), the openers shall operate on a 220 volt ac, 50hz.

2.4 Codes and standards. The can openers shall comply with the following code:

Underwriters Laboratories, Inc. Standard No. 73: Motor Operated Appliances

2.5 Instruction plate. Each can opener shall bear instructions stamped on a stainless steel plate riveted to the body or indented in the body. Plastic bodies shall be provided with a decalomania containing the required instructions. As a minimum, instructions shall include replacement of the cutting and feed wheels, a method for accomplishing clearance between the cutting and feed wheels, and a method for lubricating the moving parts.

2.6 Identification marking ("Government unique" requirement). Each can opener shall be permanently and legibly marked with the manufacturer's identification marking. Use of "stick-on" or removable labels is prohibited.

2.7 Operation parts. Each opener shall be provided with 3 sets of cutting wheels, feed wheels, and cutting wheel studs (when applicable) attached to the base (Type I) or clamping bracket (Type II). Lubrication for operational parts will not be capable of leaking, dripping, or being forced onto food or food contact surfaces. Lubricants listed in USDA Pub 1419 as safe lubricants for food contact use will be used.

3. QUALITY ASSURANCE

3.1 Certification. The contractor shall certify, and maintain substantiating evidence, that the product offered meets the salient characteristics and requirements of this commercial item description, and except for those "Government unique" requirements specified, that the product conforms to the producer's own drawings, specifications, standards, and quality assurance practices and is the same product offered for sale in the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

commercial marketplace. The Government reserves the right to require proof of such conformance prior to first delivery and thereafter as may be otherwise provided for under the provisions of the contract.

3.2 Metric products. Products manufactured to metric dimensions will be considered on an equal basis with those manufactured using inch-pound units, provided they fall within the tolerances specified using conversion tables contained in the latest revision of Federal Standard No. 376 and all other requirements of this CID are met. If a product is manufactured to metric dimensions and those dimensions exceed the tolerances specified in the inch-pound units, a request should be made to the contracting officer to determine if the product is acceptable. The contracting officer has the option of accepting or rejecting the product.

3.3 Regulatory requirements. In accordance with section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practical, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing supplier's employees to undue hazards from the recovered materials in accordance with Public Law 94-580 to the maximum extent practicable. The term "recovered materials" means materials which have been collected or removed from solid waste and reprocessed to become a source of raw materials as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this commercial item description unless otherwise specified.

3.5 UL. Acceptable evidence of meeting the requirements of UL No. 73 shall be the UL listing mark or a certified test report from a recognized independent testing laboratory acceptable to the Government.

3.6 End item examination. The contractor is responsible for assuring that the product offered conforms to the stated requirements. Sampling inspection shall be in accordance with MIL-STD-105. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 4.0. The sample unit shall be one complete can opener. The defects are as follows:

Any missing components
Any burrs, slivers, or sharp edges, that may cause injury
not constructed as specified
Not in accordance with specific design requirements
Cracked or fractured metal or plastic
Rivets not completely set, cracked, broken, or loose (when applicable)
Weld cracked or fractured, burned through, excess material not ground
smooth, or excess flux or spatter not removed (when applicable)
Any indication of rust or corrosion
Dirt, smudge, grease, or foreign matter
Pitted, scratched, or tool marks clearly noticeable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

Electrical cord missing or wrong type
Instruction missing, illegible, incorrect
Components not removable
Loose or binding moving parts
Functioning component that requires abnormal force to operate
Identification marking missing, illegible, incomplete or in wrong location
Lubrication material drips, leaks, or can be forced onto food or food contact surfaces

3.7 End item testing. One can opener from the production lot shall be tested as specified below. Any test failure shall be cause for rejection of the lot.

3.7.1 Performance test. The can opener shall cut the tops of one circular, and one elliptical can without leaving a sharp edge or any protrusion in the can. The top of each can shall be completely severed. During the test, the lid lifter shall come in contact with the can lid and after the lid is completely cut off from the can, the lid lifter shall hold the can lid away from the can.

3.7.2 Stability test of Type II openers. The lid of one number 10 can having a minimum gross weight of 10 pounds shall be cut open. The opener shall not tilt or slide during the opening of the can.

4. PACKAGING

4.1 Packaging and packing. Packaging and packing shall be commercial or export as specified (see 5.2).

4.2 Commercial packaging and packing. Each can opener shall be packaged and packed in accordance with ASTM D 3951.

4.3 Export packaging. Each can opener shall be packaged in a snug-fitting fiberboard box conforming to style RSC, class domestic, grade 175 of PPP-B-636.

4.3.1 Export packing. Four can openers, packaged as specified, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, class domestic, grade 275 of PPP-B-636.

4.4 Marking (commercial and export). Marking of unit packs and shipping containers shall be in accordance with FED-STD-123 or MIL-STD-129, as applicable.

5. NOTES

5.1 Intended use. The electric can openers covered by this commercial item description are intended for use in cutting the tops from circular and


Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

elliptical cans. The openers are primarily used in food preparation areas.

5.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Electrical power requirements (see 2.2).
c. Type of packaging and packing required (see 5.1).

5.3 CID-based part identification number. The following part identification numbering procedure is for Government purposes and does not constitute a requirement for the contractor:

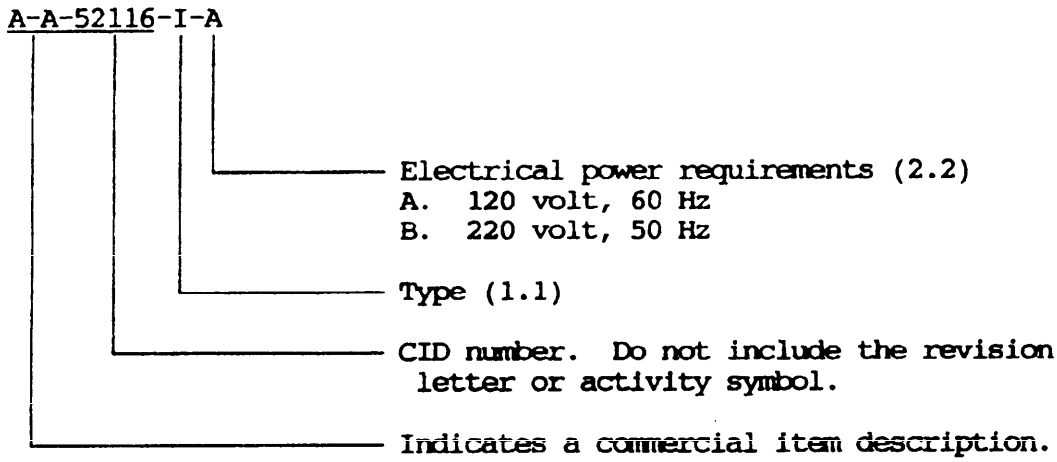

5.4 Supersession data. The heavy duty electrical can openers were previously available from Military Specification MIL-O-40155.

5.5 Sources of documents.

5.5.1 Sources of non-Government association documents.

UL Standard No. 73 is available from:

Underwriters Laboratories, Inc. (UL)
333 Pfingsten Road
Northbrook, IL 60062

ASTM D 3951 - Standard Practice for Commercial Packaging is available from:

The American Society for Testing and Materials (ASTM)
1916 Race Street
Philadelphia, PA 19103-1187

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T09:06Z
Check the source to verify that this is the current version before use.

5.5.2 Sources of Governmental documents. Copies of military and federal documents are available from:

Standardization Documents Order Desk
Building 4D
700 Robbins Avenue
Philadelphia, PA 19111-5094

5.6 "Government unique" requirements. Whenever "Government unique" requirement is included in the title of a paragraph under "Salient Characteristics", it is meant that the requirement is something that is not normally offered to the commercial marketplace by the manufacturer.

MILITARY INTERESTS:

Custodians

Army - GL
Navy - SA
Air Force - 84

Review Activities

Army - MD
Air Force - 50

CIVIL AGENCY COORDINATING ACTIVITY:

GSA - FSS

PREPARING ACTIVITY:

Army - GL

Project 7330-0649

Source: https://assist.dla.mil -- Downloaded: 202610-26T09:06Z
Check the source to verify that this is the current version before use.