NOT MEASUREMENT SENSITIVE

MIL-DTL-11484/250A
5 March 1998
SUPERSEDING
MIL-DTL-11484/250
15 October 1997

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, CITATION, U. S. PUBLIC HEALTH SERVICE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484 listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation.

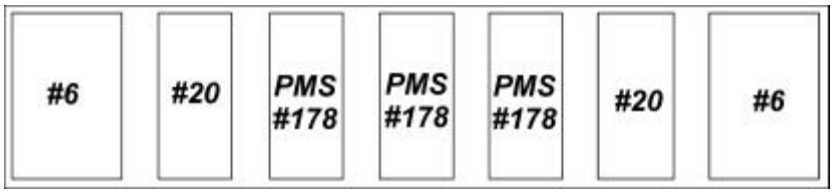

MATERIAL: Gilding Metal

FINISH: Hard Enameled, Nickel Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 16.

DIMENSIONS:
HEIGHT (Overall): 9/64 inch (0.36 cm) (REF)
WIDTH (Overall): 21/32 inch (1.67 cm) (REF)
THICKNESS (At Edge): 0.065 inch ± 0.005 inch (0.165 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to measurements taken from the Government furnished hub or die.

2. Enamel areas shall be as indicated. The colors shall conform to the TIOH chip numbers listed below.

COLOR	CHIP NO.
Maroon	6
Dark Blue	20
Flame Red	PMS # 178

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:37Z
Check the source to verify that this is the current version before use.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. Attaching device shall be prong with pick and wing type clutch. The prong shall be centered on the back of the lapel button and fused or soldered in place.

Custodian:
Army - IH

Preparing activity:
Army - IH

Review activities:
DLA - CT

(Project No. 8455-0932)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T17:37Z
Check the source to verify that this is the current version before use.