# GG-H-166b

**AUGUST 21, 1958**

**SUPERSEDING**
**Int. Fed. Spec. GG-H-00166a (GSA-FSS)**
**April 18, 1956 and**
**Fed. Spec. GG-H-166**
**January 12, 1945**

**FEDERAL SPECIFICATION**

# HEADBAND, MIRROR

*This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.*

## 1. SCOPE AND CLASSIFICATION

**1.1 Scope.**—This specification covers headbands for use by practitioners and specialists for diagnosis and treatment.

**1.2 Classification.**

1.2.1 *Types and classes.*—Headbands shall be of the following types and classes, as specified (see 6.1).

Type I.—Leather (Jefferson).
Class A.—Narrow.
Class B.—Wide.

Type II.—Nylon.

## 2. APPLICABLE SPECIFICATIONS, STANDARDS, AND DRAWINGS

**2.1 Specifications and standards.**—The following specifications, standards, and drawings, of the issues in effect on date of invitation for bids, form a part of this specification:

*Federal Specifications:*

PPP-B-585—Boxes, Wood, Wirebound.
PPP-B-601—Boxes, Wood, Cleated-Plywood.
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner.
PPP-B-676 — Boxes, Set-Up, Paperboard.

*Federal Standards:*

Fed. Std. No. 102—Preservation, Packaging and Packing Levels.
Fed. Test Method Std. No. 601—Rubber; Sampling and Testing.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards, and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

*Military Specifications:*

MIL-B-10377—Boxes, Wood, Cleated, Veneer, Paper Overlaid.
MIL-L-10547 — Liners, Case, Waterproof.

*Military Standards:*

MIL-STD-105 — Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 — Marking for Shipment and Storage.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

*Military Medical Supply Agency Drawings:*

1397 Headband, Mirror, Nylon.

(Copies of Military Specifications, Standards, and Drawings required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

## 3. REQUIREMENTS

### 3.1 Material.

3.1.1 *Leather.*— Leather shall be full grain, soft and pliable, with fine break, and shall be commercially free from flesh cuts, scores, brands, open grub holes, open scratches, fat wrinkles (except in minor degree), cracky grain, or other grain defects that would adversely affect the cutting value for the purpose intended, or the appearance or serviceability of the leather. The leather shall be well tanned with vegetable tanning materials. Grain surface shall be finished smooth and both grain and flesh sides of the skin shall be natural tannage colors.

3.1.2 *Nylon.*—Nylon shall be natural (colored) nylon.

3.1.3 *Metal.*—Metal parts shall be fabricated of brass, bronze, aluminum, corrosion resistant metal, or metal alloy of such composition suitable for the purpose intended, and as specified hereinafter.

3.1.4 *Rubber.*—Rubber shall be molded neoprene rubber with a Shore durometer hardness of 50 ± 5, when tested as specified in 4.3.1.

3.2 Type I.—The type I headband shall be of the conventional type commercially known as the Jefferson. It shall consist of a leather band with buckle permanently attached, a metal shield, and a removable swivel clamp, as described herein.

3.2.1 *Leather band.*

3.2.1.1. *Class A.*—The class A band shall be made of one-piece of leather, as specified in 3.1.1, approximately 5/64 inch in thickness, approximately 26-inches long and 1⅛ inches wide. Two holes of adequate size for attachment of the metal shield shall be provided in the center width and located in such manner that after attaching the metal shield the two free ends will be approximately 6¾ inches and 15¾ inches long, respectively.

3.2.1.2 *Class B.*—The class B band shall be made of one-piece of leather, as specified in 3.1.1, and shall be constructed as shown in figure 1.

3.2.1.3 *Leather strap loop.*—The loop shall be made of the same leather as the band, approximately ⅜ inch wide with end riveted together. When on the band the riveted ends shall be concealed within the buckle loop. The strap loop shall be of adequate size to hold the strap end in place and permit ease of insertion and removal.

3.2.2 *Buckle.*

3.2.2.1 *Class A.*—The class A buckle shall be of metal, uncovered, of a sliding self-clamping type that insures against slipping and of a size to properly fit the strap. It shall be securely stitched to the short end of the strap.

3.2.2.2 *Class B.*—The class B buckle shall be metal, leather covered, regular pin type, approximately ¾ inch wide and ¾ inch long in the center of the width, inside measurements. The cover shall be of one-piece of leather, smoothly and neatly attached.

3.2.3 *Metal shield.*—The metal shield shall consist of an inside and outside plate of brass constructed as shown in figure 1. The brass plates shall be of such composition and tensile strength as to maintain their rigidity when in use and permit shaping to fit comfortably on the forehead of the user. The outside plate shall have a 0.368 ± .004 inch diameter ball top post, approximately ⅝ inch over-all height permanently attached and centered approximately ⅜ inch from the lower edge in the center of the length.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

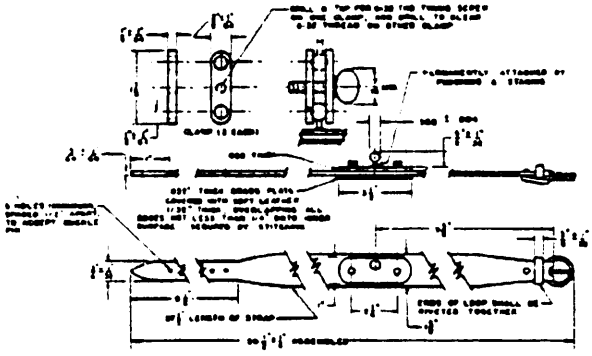


FIGURE 1.

Each plate shall be provided with two holes spaced approximately 2¼ inches apart, in the center width, each hole inset and equal distance from the end. The inside plate around the holes shall be depressed to permit soldering or otherwise securely attaching the head of a flat head machine screw inserted in the holes, flat and even with the surface of the plate. The outer smooth surface of the inside plate shall be padded with suitable material and covered with one-piece of soft leather approximately 1/32 inch thick, which shall overlap all edges not less than ¼ inch onto the inner surface where it shall be secured in place by stitching. The machine screws on the inside plate shall be inserted through the holes provided in the leather band and the outside plate and secured in place by nuts of adequate size for sturdy construction and to permit ready removal.

3.2.4 *Clamp.* — The clamp shall be fabricated of metal, as specified in 3.1.3, and constructed as shown in figure 1.

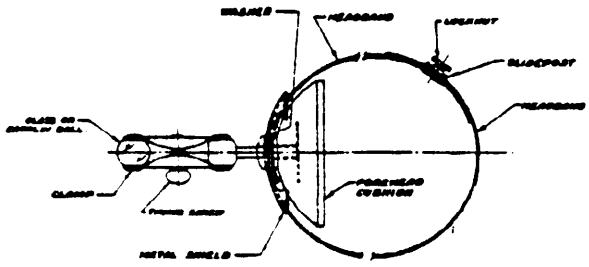


FIGURE 2.

3.3 Type II.—The type II headband shall be an adjustable headband with a shield, forehead cushion, and ball clamp joint designed for holding head mirror in any desired position, as shown in figure 2. Headband shall be slip-resistant, semiflexible, conform to head contours, and shall be capable of being sterilized by boiling.

3.3.1 *Nylon band.*—The Nylon band shall be of nylon, as specified in 3.1.2, and constructed in accordance with Military Medical Agency Drawing 1397.

3.3.2 *Slide post and locknut.* — The slide post and locknut shall be fabricated of aluminum and constructed in accordance with Military Medical Agency Drawing 1397.

3.3.3 *Metal shield.*—The metal shield shall be constructed with a ball top post of 0.368 ± .004 inch diameter, in accordance with Military Medical Agency Drawing 1397. The shield and ball top post shall be fabricated of aluminum.

3.3.4 *Forehead cushion.* — The forehead cushion shall be fabricated of rubber, as specified in 3.1.4, and constructed in accordance with Military Medical Agency Drawing 1397. The metal insert shall be made of brass.

3.3.5 *Washer.*—The insert washer, used between the bands where connected between the metal shield and the forehead cushion, shall be fabricated of neoprene. The dimensions of the washer shall be in accordance with Military Medical Agency Drawing 1397.

3.3.6 *Clamp.* —The clamp shall be constructed in accordance with Military Medical Agency Drawing 1397. The clamp arms shall be fabricated of stainless steel and the thumb screw of brass.

3.3.7 *Resistance to boiling.*—When tested as specified in 4.3.2, the nylon headband shall not become tacky, soften, fuse, crack, or shall not distort upon cooling. The metal parts shall not pit or discolor excessively. Any



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

TABLE I.—*Packaging quantities*

| Federal stock number | Unit package | Intermediate package | Shipping container |
|---|---|---|---|
| 6515–340–7700 or 6515–340–7900 | 1 unit | 12 units | 288 units |

overpacked in an exterior container, such units shall be packed in an exterior container of suitable size and design, acceptable to a common carrier, which will insure safe delivery to destination.

5.1.3 *Level A.*

5.1.3.1 *Unit package.*—Each unit shall be formed into a coil of such diameter that the material will not take a permanent "set" and shall be packaged in a carton of appropriate size constructed in accordance with Federal Specification PPP–B–676. Each carton shall be adequately secured to prevent accidental opening.

5.1.3.2 *Intermediate package.*—Intermediate package shall be either a carton of appropriate size and design, or a complete wrapping with kraft paper of suitable weight. Carton or wrapping shall be adequately secured to prevent accidental opening.

5.1.4 *Level C.*—Units shall be packaged in standard commercial containers of the size and kind commonly used, which will afford the degree of protection required for shipment and use of the product for its intended purpose within the continental limits of the United States of America.

5.2 Packing.

5.2.1 *Level A.*

5.2.1.1 *Exterior container.*—Exterior container shall be designed for type 2 load and constructed in accordance with Federal Specification PPP–B–585, style 3, for class 3 use; PPP–B–601, table II, using type III, class 1 plywood; PPP–B–621, table III; or Military Specification MIL–B–10377, table II.

5.2.1.2 *Case liner.*—Each level A box shall be lined with a waterproof case liner conforming to Military Specification MIL–L–10547. Closure and sealing shall conform to applicable paragraphs of appendix thereto.

5.2.1.3 *Strapping.* — Strapping, when required, shall be in accordance with applicable box specification.

*Note.*—Strapping will not be required for shipment forwarded to a receiving activity within the continental limits of the United States for storage and redistribution.

5.2.2 *Level B.*

5.2.2.1 *Exterior container.*—Exterior container shall conform to Federal Specification PPP–B–601, table I, using type III, class 1 plywood, or shall be designed for type 2 load and constructed in accordance with Federal Specification PPP–B–585, style 3, for class 2 use; PPP–B–621, table I; or Military Specification MIL–B–10377, table I.

5.2.3 *Level C.* — The subject commodity shall be packed in substantial commercial containers of the type, size, and kind commonly used for the purpose, so constructed as to insure acceptance and safe delivery by common or other carriers, at the lowest rate, to point of delivery called for in the contract or purchase order.

5.3 Marking.

5.3.1 *Interior packages.*—Each unit package and intermediate package shall be marked in accordance with section 5 of Military Standard MIL–STD–129.

5.3.2 *Shipping container.*—Shipping container shall be marked in accordance with



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.

Military Standard MIL–STD–129. Service color and service symbol markings are required only on direct shipments from the contractor's plant to overseas activities.

## 6. NOTES

6.1 Ordering data.—Purchasers should exercise any desired options offered herein, and procurement documents should specify the following:

(*a*) Title, number and date of this specification.

(*b*) Class required (see 1.2).

(*c*) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

6.2 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated, the specification to apply in all other respects.

6.3 This specification does not include all types, classes, grades, sizes, etc., of the commodity indicated by the title of the specification, or which are commercially available, but is intended to cover the type, etc., normally procured to meet Federal Government requirements.

6.4 This specification covers the following items appearing in the Armed Services Medical Stock List:

6515–340–7700 — Headband, Mirror, Nylon.

6515–340–7900 — Headband, Mirror, Leather, Jefferson.

6.5 Transportation description.—Transportation description applicable to this item is:

Straps, leather, fitted with buckles, not otherwise indexed by name.

Carload minimum weight 20,000 pounds, subject to Rule 34, Uniform Freight Classification.

Motor volume minimum weight 20,000 pounds.

Notice. — When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

MILITARY INTERESTS:

Army—M
Navy—Md
Air Force.

Copies of this specification may be purchased for 5 cents each.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:49Z
Check the source to verify that this is the current version before use.