MILITARY SPECIFICATION SHEET

CIRCUIT CARD ASSEMBLY, 9290647
(MAGAZINE LOGIC "A"; LEFT, RIGHT)

This specification is approved for use by the US Army Armament, Munitions and Chemical Command and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the circuit card assembly described herein shall consist of this document and the latest issue of specification MIL-C-63371(AR).

Electrical Requirements

1. All frequencies and pulse widths shall be within plus or minus 2.0% except for the output from Pin 46 which shall be 1 MHz plus or minus 20.0%. All output pulse widths shall be within plus or minus 20.0%.

2. All input and output levels shall be consistent with IC operating levels and power supply regulation and shall be within plus or minus 1.0% of the indicated nominal values, unless otherwise indicated.

FSC: 1095

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

BOARD POWER

NOTE: Maintain the following throughout all tests.

Pin No.	Voltage
2	14
37	14
35	0
70	0
65(B)	5(B)

MINE DISPENSE LOGIC

Test 1A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
50	0	41	Figure 1
51	0	42	Figure 1
52	2889 Hz, 14V	44	Figure 1
		45	Figure 1
		39	Figure 1

Test 1B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
51	14	41	Figure 1
52	0	42	Figure 1
50	2889 Hz, 14V	44	Figure 1
		45	Figure 1
		39	Figure 1


Test 1C

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
47	0	48	2889 Hz, 14V
51	0		
49	2889 Hz, 14V		

(B) denotes change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

PHASE RELATIONSHIP REQUIREMENTS

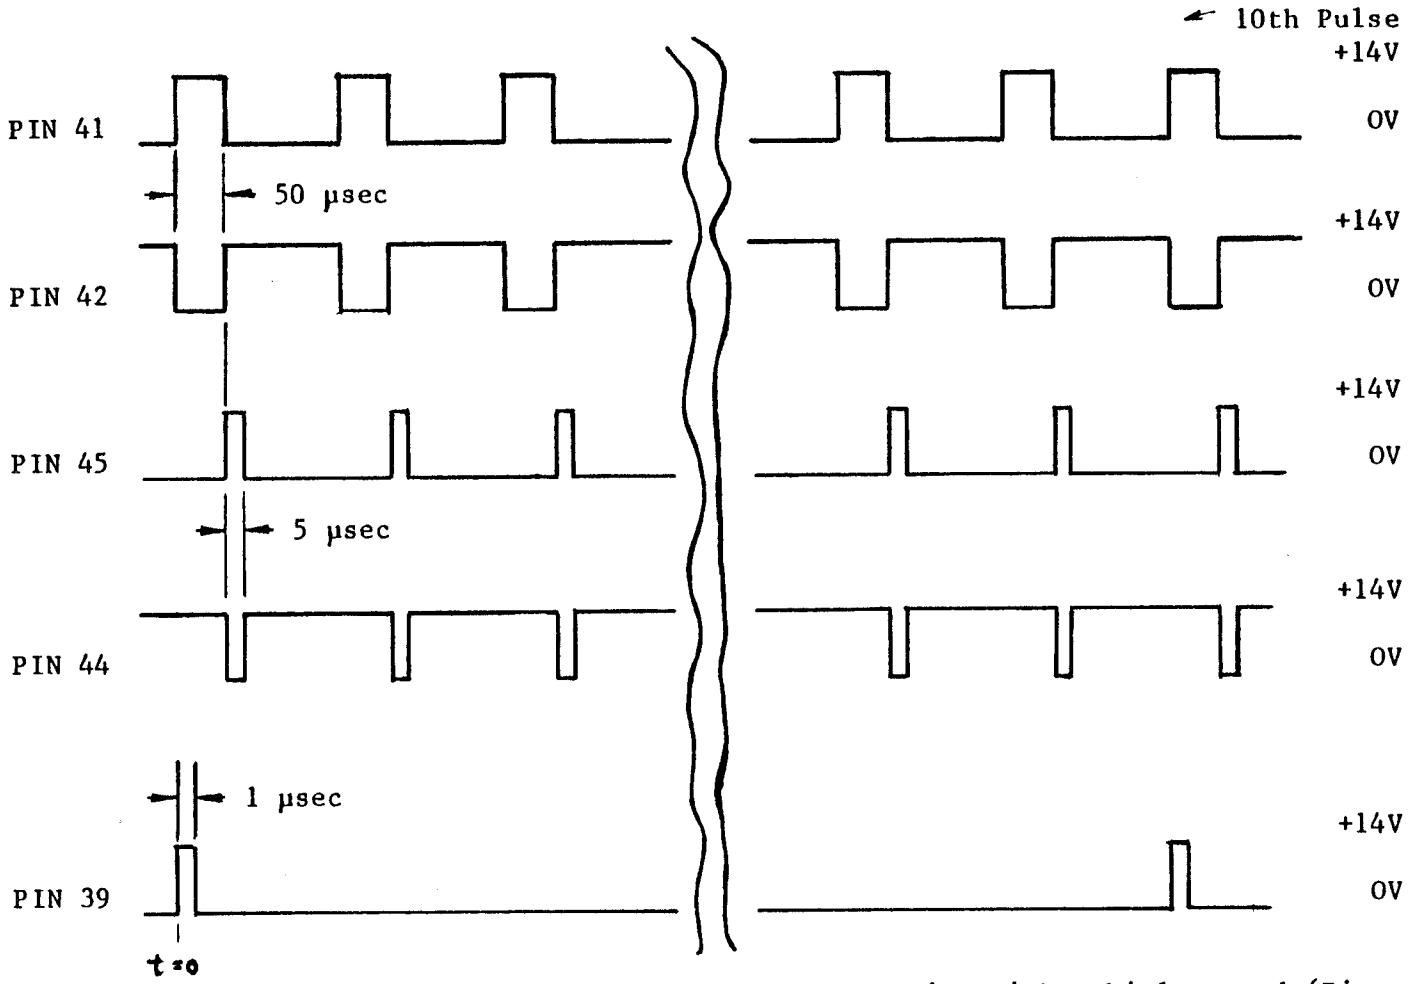

NOTE: The frequency of these waveforms varies with vehicle speed (Pin 52) and the data bits as per TABLE 2, but the time relationship remains the same.

FIGURE 1. DISPENSE ONE MINE PHASE RELATIONSHIP REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 1D

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
49	0	48	2889 Hz, 14V
51	14		
47	2889 Hz, 14V		

NOTE: Pre-set the following conditions prior to the performance of Test 1E through Test 1H. Previously specified BOARD POWER shall be maintained.

Pin No.	Voltage
57	0
58	14
59	14
60	0
61	14
66	0

Test 1E

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
50	0	39	Fig. 2
51	0		
52	575 Hz, 14V		

Test 1F

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
50	0	39	0
51	0		
52	550 Hz, 14V		

Test 1G

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
50	0	41	Fig. 2
51	0		
52	555 Hz, 14V		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

Test 1H

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
50	0	41	0
51	0		
52	527 Hz, 14V		

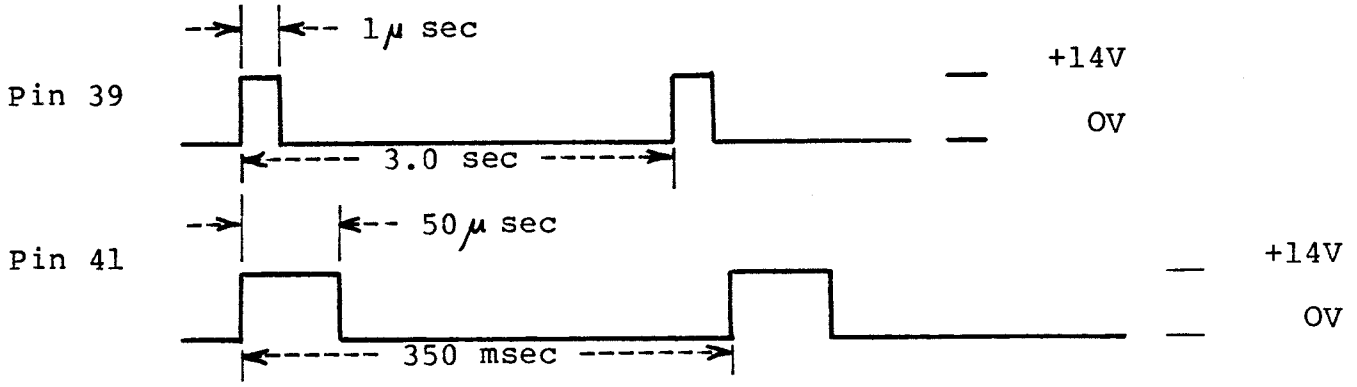


FIGURE 2. DISPENSE ONE MINE, LEFT, RIGHT

Test 2A

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
53	Figure 3	55	Figure 3
54	14		

Test 2B

INPUT		OUTPUT	
Pin No.	Voltage	Pin No.	Voltage
53	Figure 4	55	0V
54	0		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

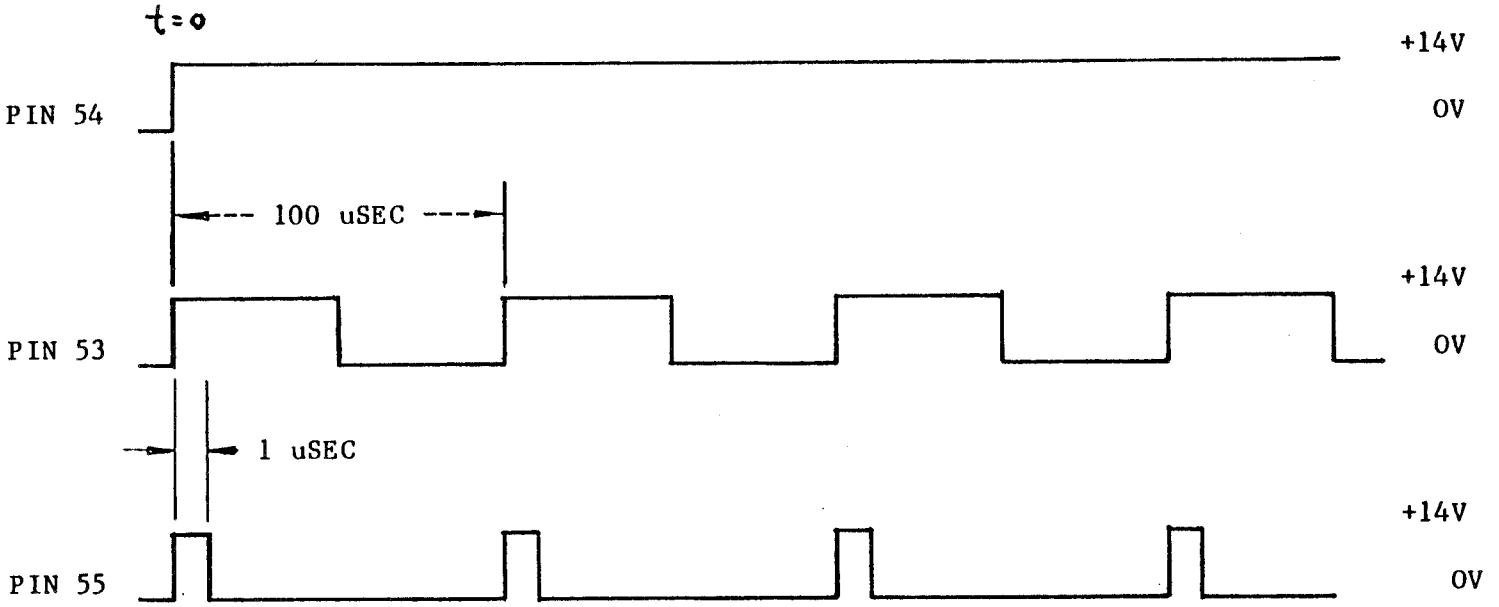


FIGURE 3. ONE MINE DISPENSED, LEFT, RIGHT

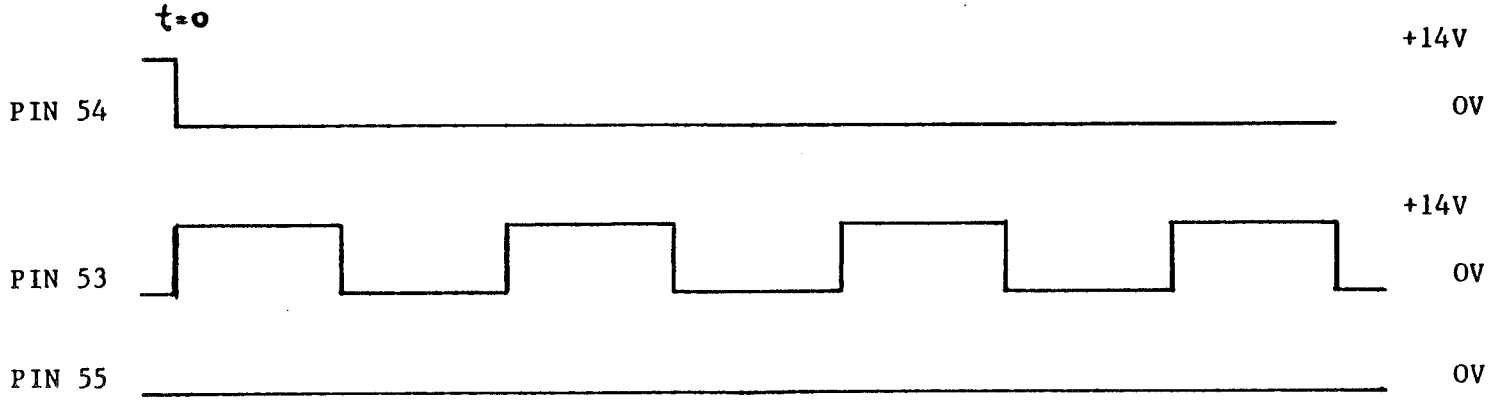


FIGURE 4. ONE MINE DISPENSED, LEFT, RIGHT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

TABLE I - LOGIC

NOTE: Connect a 300 ohm, 3 watt resistor between pin no. 67 and 24 volts.

	Input Pin Numbers					Output Pin Numbers			
Pin No.	61	57	58	69	62	63	64	68	67
V	14	14	0	14	14	0	14	0	0
O	0	14	14	14	14	0	0	14	0
L	14	0	14	14	14	0	14	0	0
T	14	14	14	14	0	14	14	0	24
S	14	14	14	0	14	14	14	0	24
	0	0	0	14	14	0	14	0	0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

TABLE 2 - LOGIC

NOTE: Maintain throughout this test, in addition to Board Power.

Pin No.	Voltage
50	0
51	0
52	2889 Hz, 14V

Also, output pin number 42 is complement of pin 41 throughout test.

	Input Pin Numbers						Output Pin Numbers	
Pin No.	66	60	59	61	57	58	41	
V	0	0	0	0	0	0	0.9	
O	0	0	0	14	0	0	2.0	
L	0	0	0	0	14	0	2.2	H
T	0	0	0	14	14	0	2.5	E
A	0	0	0	0	0	14	2.9	R
G	14	0	0	14	0	14	3.3	T
E	0	14	0	14	0	0	0.9	Z
S	0	14	0	14	14	0	3.7	
	0	14	0	0	0	14	5.2	
	0	14	0	14	0	14	13.35	
	14	14	0	0	14	0	2.60	
	0	0	14	0	14	0	3.4	
	0	0	14	14	14	0	4.7	
	0	0	14	0	0	14	6.7	
	0	0	14	14	0	14	17.2	
	0	14	14	14	0	0	1.2	
	0	14	14	0	14	0	6.0	
	0	14	14	14	14	0	8.20	
	0	14	14	0	0	14	12.0	
	14	14	14	14	0	0	2.0	

Custodian:
Army-AR

Preparing Activity:
Army-AR

(Project 1095-A140/5)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:43Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-63371/5B (AR)	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil - Downloaded: 2026-03-25T02:43Z
Check the source to verify that this is the current version before use.