MIL-H-83190 (USAF)
AMENDMENT 3
8 November 1972
SUPERSEDING
AMENDMENT 2
14 February 1972

MILITARY SPECIFICATION

HOLDER ASSEMBLY, CHART-LET-DOWN, PLU-4/A AND PLU-5/A

This amendment forms a part of Military Specification MIL-H-83190 (USAF) dated 18 December 1969.

Page 1, paragraph 2.1: Under Military Specifications delete MIL-G-8602 and title thereto and add: "MIL-R-19 Resistors, Variable, Wire-Wound (Low Operating Temperature), General Specification for" and "MIL-G-81704 Glass, Aircraft Instrument, Lighting Wedge and Cover".

Page 2, paragraph 3.1, line 2: Delete "select switch, light-dimming rheostat and switch" and substitute "rheostats".

Page 3, paragraph 3.4.1, line 3: Delete "the rheostat" and substitute "either rheostat".

Page 3, paragraph 3.6.1, line 2: Change "rheostat" to "rheostats" and delete the words "select switch".

Page 4, paragraph 3.6.4: Delete.

Page 4, paragraph 3.6.5: Delete and substitute:

"3.6.5 Rheostats. Two rheostats shall be provided to control the brightness of the lights. One rheostat shall control the red lights; the other rheostat shall control the white lights. Each rheostat shall have a built-in switch for cutting the light off and shall be operable by an operator wearing gloves. The rheostats shall meet the requirements of MIL-R-19. Both red and white lighting shall be fully dimmable to the off position of the rheostat."

Page 4, paragraph 3.6.7: Delete the first sentence and substitute: "The lens shall be made of solid-tempered safety glass in accordance with MIL-G-81704, type I, and shall be mounted so that there is no movement within the frame."

FSC 1680

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:39Z
Check the source to verify that this is the current version before use.

* Page 4, paragraph 3.6.8: Delete and substitute:

"3.6.8 Electrical connections. The holder assembly shall be provided with a 3-conductor, No. 20 AWG, 7-ampere, 300-volt maximum, rubber-jacketed, retractile power cord with an MS3116F8-3P plug. The third conductor shall provide a separate ground for the chart holder assembly. The cord shall be 3 feet in length when fully extended."

Page 5, figure 1: Delete and substitute the attached figure 1. Figure 1 forms page 3 of this amendment.

Page 6, paragraph 4.2: Delete and substitute:

"4.2 Classification of tests. The inspection and testing of the holder assembly shall be classified as follows:

a. Preproduction tests (see 4.6)

b. Quality conformance tests (see 4.3)."

Page 7, paragraph 4.3.2: Delete "c. Environmental tests" and substitute "c. Electrical test".

Page 8, paragraph 4.4.2.1: Delete. (Added as separate test - see 4.4.4 below.)

Page 8, paragraph 4.4.2.2: Delete subparagraphs a, b, and c and substitute:

"a. The on/off rheostats shall be operated to determine that they perform smoothly and uniformly throughout their range of travel both electrically and mechanically.

b. Both red and white lighting shall be operated to determine that both types of lighting are fully dimmable to the off position of the rheostats."

Pages 8 and 9, paragraph 4.4.2.3c: Delete the second sentence and substitute: "Check both rheostats individually by rotating the brightness control to the full-bright position."

Page 10: Add:

"4.4.4 Electrical test. Each lamp shall be removed from its socket and a test voltage of 556 volts, 60 cycles, connected between each connector pin and the holder assembly and between each pin for a period of 1 minute. There shall be no evidence of leakage or breakdown as a result of this test."

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:39Z
Check the source to verify that this is the current version before use.

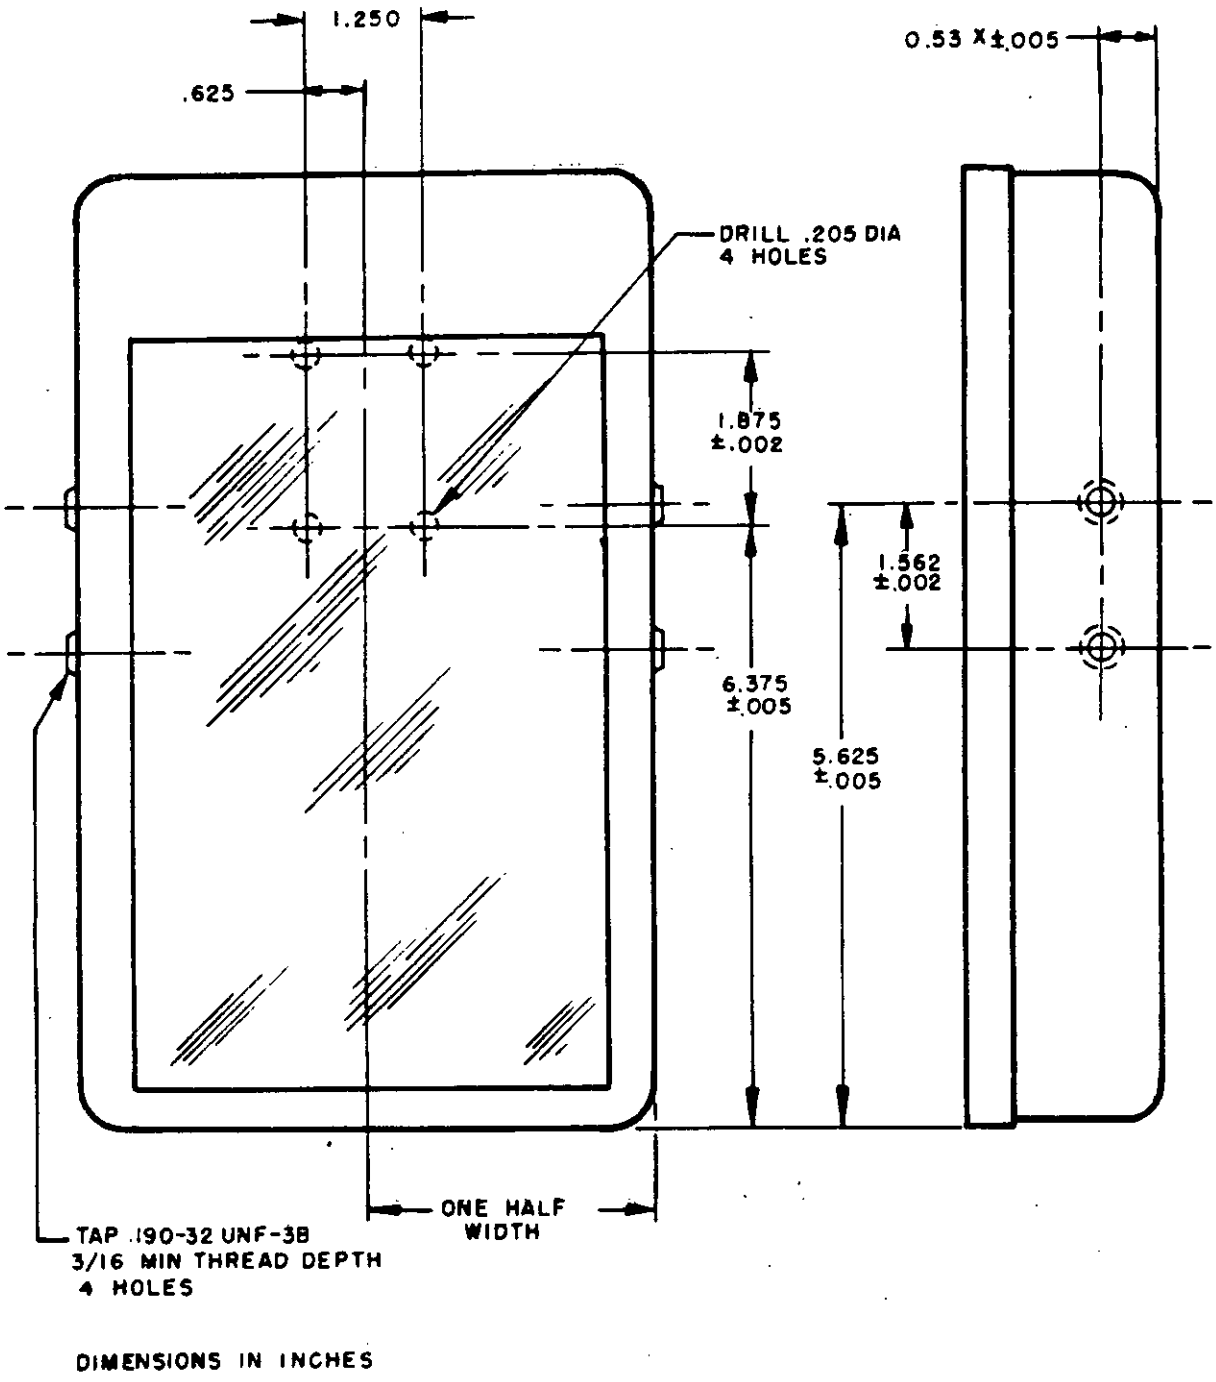


FIGURE 1. Chart-Let-Down Holder Mounting Provisions

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:39Z
Check the source to verify that this is the current version before use.

Page 10: Add:

"4.6 Preproduction tests. The preproduction tests shall consist of all the tests described under 4.4. The preproduction tests shall be performed on three test samples to demonstrate that the chart holders meet the requirements of this specification. The test results shall be approved by the procuring activity prior to chart holder production."

Identification of changes. The margins of this amendment are marked with an asterisk to indicate where changes from the previous amendment were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidder and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the latest previous amendment.

Custodian:
Air Force - 11

Review activity:
Air Force - 82

Preparing activity:
Air Force - 11

Project No. 1680-F312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T07:39Z
Check the source to verify that this is the current version before use.