
FED. SUP CLASS
4130

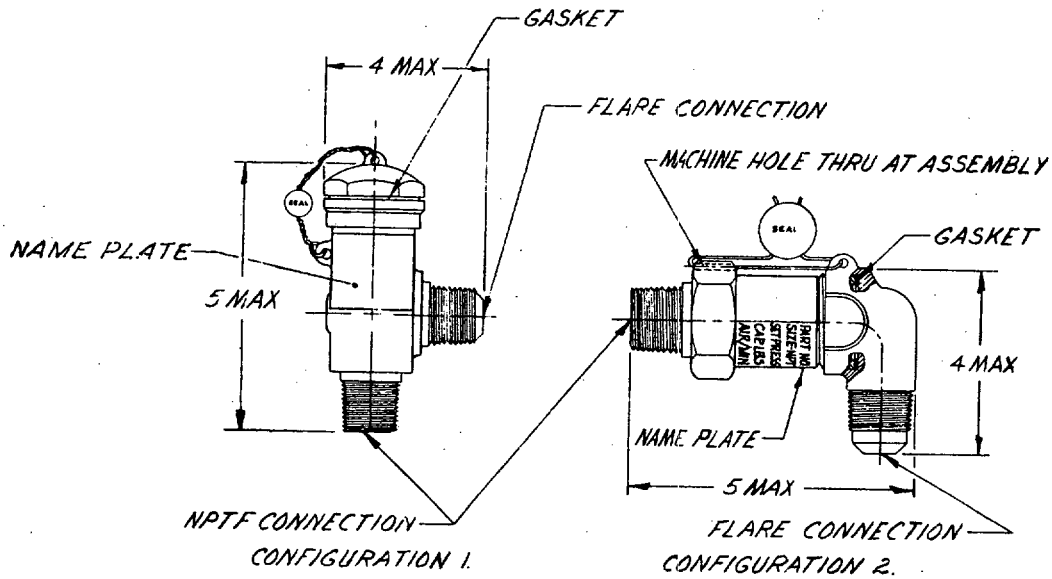


| PART NO. | CAPACITY LBS. AIR/MIN (MIN) | RELIEF SETTING (P.S.I.G.) | CONNECTION SIZE (INCHES) | |
|---|---|---|---|---|
| | | | NPTF | FLARE |
| MS17415-1 | 3.2 | 300 | 3/8 | 3/8 |

NOTES

1. For use with dichlorodifluoromethane($CCl_2F_2$) R-12, Refrigerant.
2. ALL CONNECTIONS SHALL BE MALE. FLARE CONNECTION SHALL CONFORM TO MS 35873. NPTF CONNECTION SHALL CONFORM TO MS 35868.
3. VALVE SHALL BE SPRING LOADED, ANGLE TYPE BODY, CONFIGURATION 1 OR 2.
4. ALL DIMENSIONS ARE IN INCHES.
5. (B) REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID OR REQUEST FOR PROPOSAL.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

APPROVED 2 JAN 62 REVISED (A) 24 NOV 65 (B) 1 FEB 71

User Army - CE Navy - MC

Review Army - ME

This Military standard is mandatory for use by all Department and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

| | | |
|---|---|---|
| P.A. ARMY GL<br>Other Cust<br>NAVY-YD | TITLE<br>VALVE, SAFETY RELIEF, REFRIGERANT-12 | MILITARY STANDARD<br>MS 17415 |
| PROCUREMENT SPECIFICATION<br>MIL-V-23135 | SUPERSEDES: | SHEET OF |

DD FORM 1 SEP 67 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-433-696/4746

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:08Z
Check the source to verify that this is the current version before use.