
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-B-8914

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE.

Form Approved
OMB No. 0704-0188

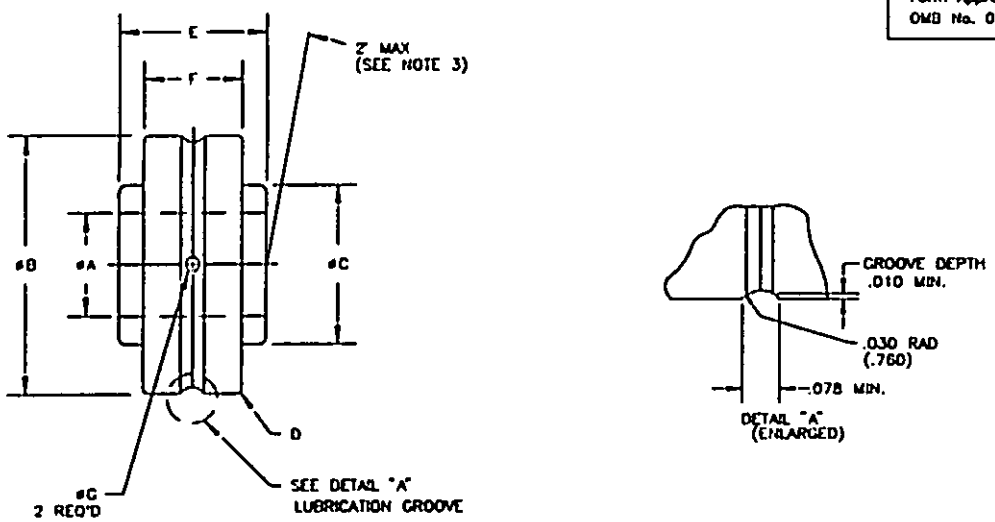

DASH NO.	øA +.0000 -.0005 BORE	øB +.0000 -.0005 O.D.	øC MIN.	D +.015 -.000 RADIUS	E +.000 -.005 WIDTH INNER RING	F +.000 -.005 WIDTH INNER RING	øC LUBRICATION HOLE	WEIGHT MAX. POUNDS	STATIC LIMIT LOAD POUNDS		DYNAMIC LOAD RATING POUNDS
									RADIAL	AXIAL	RADIAL
-25	1.5360	2.5000	1.800	.030	.670	.580	.060	.41	12,400	1,000	6,600
-28	1.7500	2.6880	1.980					.49	13,700	1,100	7,000
-33	2.0630	3.0000	2.300					.54	15,800	1,300	7,600
-37	2.3130	3.2500	2.560					.58	17,000	1,400	8,000
-47	2.9380	3.8750	3.200					.75	21,000	1,700	9,000
-49	3.0630	4.0000	3.330					.78	21,900	1,800	9,100

REQUIREMENTS:

1. MATERIAL: RETAINER; CARBON STEEL, ONE PIECE.
   RINGS AND ROLLERS, STEEL, MIL-S-7420, PER FED. STD. NO. 66, STEEL AMS 6440.
   SEALS; GLASS FIBER REINFORCED PTFE.
(A) 2. FINISH: ALL EXTERNAL SURFACES, AS MOUNTED, ZINC-NICKEL PLATE PER AMS 2417, TYPE 2, OR CADMIUM PLATED IN ACCORDANCE WITH QQ-P-416, TYPE I, CLASS 2, THICKNESS .0003 TO .0006 INCHES.
3. SURFACE ROUGHNESS: RACEWAYS 8 MICROINCHES Ra, ROLLER 6 MICROINCHES Ra, OTHER GROUND SURFACES 32 MICROINCHES Ra IN ACCORDANCE WITH ANSI/ASME B46.1. REMOVE BURRS AND SHARP EDGES.
4. DIMENSIONS: ALL DIMENSIONS ARE AFTER PLATING AND ARE IN INCHES, UNLESS OTHERWISE SPECIFIED.
5. TOLERANCES-DECIMALS +.010(.250) TO -.000(0), UNLESS OTHERWISE SPECIFIED.
6. RADIAL INTERNAL CLEARANCE: .0006 to .0017.
(A) 7. LUBRICANT: MIL-G-23827 OR MIL-G-81322. ALL BEARINGS SHALL BE PACKED WITH GREASE CONFORMING TO MIL-G-81322 UNLESS OTHERWISE SPECIFIED. ALL BEARINGS SHALL BE FILLED 80% MINIMUM WITH GREASE. MIL-G-23827 SHALL NOT BE USED WHERE TEMPERATURES EXCEED 250°. IF MIL-G-23827 IS REQUIRED, ADD LETTER "G" AFTER MS21446 DASH NUMBER.
8. MARKING: THE MARKING SHALL CONSIST OF THE MS PART NO. AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130.
(A) 9. PART NO: EXAMPLE, MS21446-47 = BEARING, ROLLER, SELF-ALIGNING, 2.9380 BORE WITH MIL-G-81322 LUBRICANT.
10. PACKAGING: BEARINGS SHALL BE INDIVIDUALLY PACKAGED TO THE REQUIREMENTS OF MIL-P-197, PACKAGE MARKED WITH MANUFACTURER'S NAME OR TRADEMARK AND DATE OF LUBRICATION BY MONTH AND YEAR.

NOTES:

1. DESIGN FEATURES FOR DESIGN FEATURE PURPOSES, THIS SPECIFICATION TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
2. REFERENCED DOCUMENTS. REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.
(A) 3. SELF-ALIGNING TO 2° MAX IN EITHER DIRECTION.

(A) DENOTES CHANGE

INCH-POUND

PREPARING ACTIVITY: NAVY-AS
CUSTODIANS: ARMY-AT NAVY-AS
AIR FORCE-99 DLA-
REVIEW: AS, AV, IS, 99
USER:
PROJECT NUMBER: 3110-0893

MILITARY SPECIFICATION SHEET

TITLE

BEARING, ROLLER, SELF-ALIGNING SINGLE ROW, BARREL ROLLER, TORQUE TUBE, AIRFRAME, ANTIFRICTION, SEALED TYPE V.

SPECIFICATION SHEET NUMBER
MS21446 05 DEC 94 REV A

SUPERSEDING
MS21446 12 SEPT 84

AMSC- N/A FSC 3110

DISTRIBUTION STATEMENT
A. Approved for public release; distribution is unlimited.

Page 1 of 1

DD Form 672, MAY 88 PREVIOUS EDITIONS ARE OBSOLETE PROPOSED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:40Z
Check the source to verify that this is the current version before use.