


FED. SUP CLASS
1660

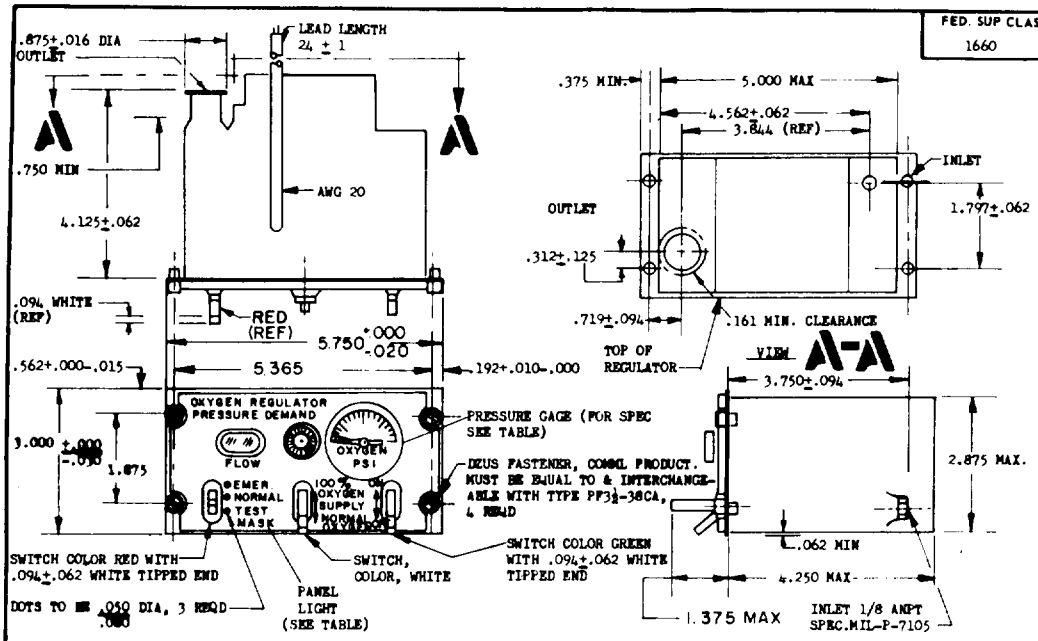



OPTIONAL PANEL CONFIGURATION



SCHEMATIC PANEL LIGHTING

MS27465 DASH NO.	TYPE	PRESSURE GAGE SPECIFICATION	PANEL LIGHT	PANEL FINISH
-1	CRU-68/A	MIL-G-25520	MS25010A12A OR MS25453-3 (NO LAMP TO BE FURNISHED)	BLACK ***
-2	CRU-67/A	MIL-G-25520	MS25010A16A OR MS25453-2 (NO LAMP TO BE FURNISHED)	GRAY **

DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.005 PANEL DIMENSIONS SHALL CONFORM TO MS25212, UNLESS OTHERWISE SPECIFIED.

REGULATORS UTILIZING PRESSURE GAGE IN ACCORDANCE WITH MIL-G-25520 SHALL HAVE AN INLET PRESSURE OF 50 TO 500 PSI.

PRESSURE GAGE SHALL INDICATE OXYGEN PRESSURE AT ALL TIMES REGARDLESS OF POSITION OF ON-OFF VALVE.

REGULATOR PERFORMANCE SHALL BE IN ACCORDANCE WITH SPEC. MIL-R-25916.

THE BACKGROUND COLOR OF THE PANEL SHALL BE DURABLE DULL *** BLACK, COLOR 37038, ** GRAY, COLOR 36231, FED. STD. 595.

INACTIVE FOR NEW DESIGN AFTER 29 OCTOBER 1974. USE MS 27599.
MS 27465 SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

(C) Reclaimed materials. The use of reclaimed materials shall be encouraged to the maximum extent possible.

APPROVED 31 AUG 66 REVISED (A) 29 MAR 67 (B) 29 OCT 74 (C) 12 NOV 1979

USER ACTIVITIES:

REVIEWER ACTIVITIES:
Air Force-11

This military standard is approved for use by (Code 99), (Department of the Air Force) and is available for use by all Departments and Agencies of the Department of Defense.

P. A. 99 Other Cust	INTERNATIONAL INTEREST	TITLE REGULATOR, OXYGEN, DILUTER DEMAND	MILITARY STANDARD MS27465(USAF)
PROCUREMENT SPECIFICATION MIL-R-25916	SUPERSEDES: USAF DWGS 62D4380, 62D4450, 62D4451		SHEET 1 OF 1

DD FORM (MAY 73) 672-1 (COORDINATED)

1660-F4-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:40Z
Check the source to verify that this is the current version before use.