
FED. SUP CLASS
6640

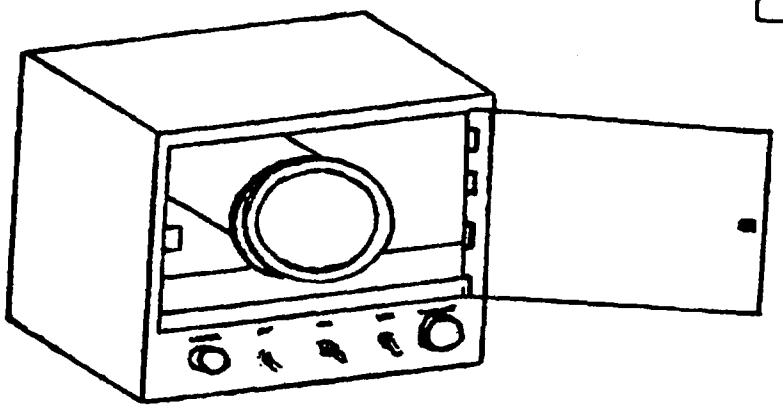

PART NUMBER	NUMBER OF CHAMBER	OUTPUT WATTAGE
MS36283-1		0-100
MS36283-		0-300
		0-500

CANCELLED
CANCELLED AFTER 23 OCT 1991
NO SUPERSEDING STANDARD

MATERIAL: ...h Federal Specifica-...l be suitable for ...

DESIGN: ...as specified in the ...one gasket when a vacuum of ...rial grade oxygen at the rate of ...the chamber. A radio frequency of 13.56 ...assigned by FCC regulations shall be provided by ...coils around the chamber. A R.F. tuning variable capacitor ...ed to maintain minimum reflected power. Also, an interlocking RF p... supply and AC cutoff switch shall be provided for safety when door is opened. The equipment shall conform to all the requirements of the Underwriters Laboratories, Code Number UL1262.

NOTE: Items differing from this Military Standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements specified herein.

(A) CANCELLATION

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
EA		ASHER, LOW TEMPERATURE, RADIO FREQUENCY	MS36283
Other Cust MS 99			
Procurement Specifications: NONE	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE CANCELLATION

Project Number 6640-1736

USER ACTIVITIES: ARMY - MD, DM
NAVY - MS

REVIEWER ACTIVITIES: ARMY - ME
NAVY - OS
AIR FORCE - 03

MISC R/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for competitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:37Z
Check the source to verify that this is the current version before use.