
FED. SUP CLASS
6640

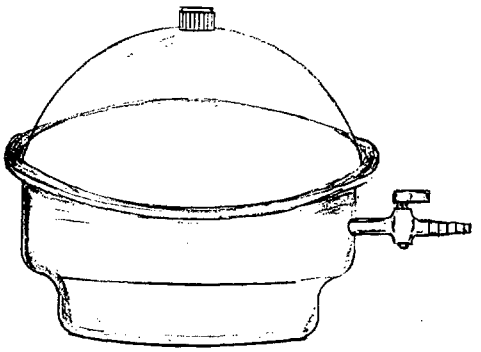

PART NUMBER	DIMENSIONS (mm) OD	ID	HEIGHT	PLATE DIAMETER (mm)
MS36485-1	172	150	190	140
MS36485-2	235	200	242	190
MS36485-3	286	250	292	230

MATERIAL: The cover shall be made of transparent polycarbonate. The bowl and plate shall be made of polypropylene.

DESIGN: The desiccator shall consist of a cover and bowl that when placed together form a closed chamber. The seal between the two parts may be accomplished with the aid of a neopreme "O" ring or by using grease. The assembly shall be tested at a residual vacuum of 15 mm of mercury at an external pressure of 1 atomosphere over a temperature range of 5 to 90 degrees centigrade. The desiccator shall be supplied with a perforated plate 3.2 mm thick for supporting dishes.

Desiccators will be supplied with a valve for vacuum applications, unless otherwise specified in invitation for bid. Desiccators without valves shall have the suffix "A" after the part number. (Sample MS36485-1A)

NOTES: Items differing from this military standard by minor variations in design or dimensions are considered standard under this document, provided such variations do not affect performance and are not in conflict with the material requirements as specified herein.

APPROVED 12 FEB 1982 REVISED

USER ACTIVITIES:

REVIEWER ACTIVITIES: ARMY - MD
NAVY - OS
AIR FORCE - 03

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. EA	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust MS 99		DESICCATOR Plastic	MS36485
Procurement Specifications None	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project Number 6640-0796
STANDARD DATE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:41Z
Check the source to verify that this is the current version before use.