

FED. SUP CLASS
4730

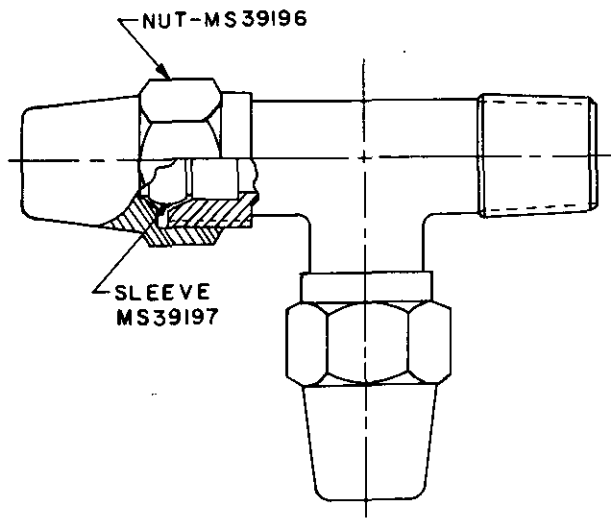

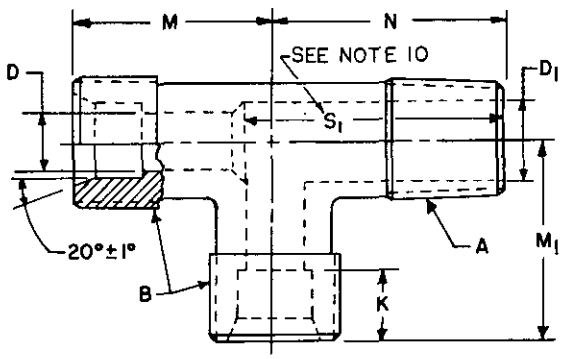

REVIEWER: CG, CS, ME
USER: AT, AV, GL, MC

DASH NO. See Note 11 ASSY	DASH NO. See Note 11 BODY	TUBE O.D. M END	TUBE O.D. M_1 END	A PIPE THREAD NPTF	B STRAIGHT THREAD CLASS 2A	D DIA DRILL	D_1 DIA DRILL	K	M ±.03	M_1 ±.03	N ±.03	S_1 MIN
* 1	*21	1/4	1/4	1/8	7/16-24UNS	.188	.188	.25	.63	.63	.67	----
* 2	*22	3/8	3/8	1/4	17/32-24UNS	.312	.312	.31	.80	.80	.93	----
3	23	3/8	3/8	3/8	17/32-24UNS	.312	.406	.31	.85	.85	.92	1.12
* 4	*24	1/2	1/2	3/8	11/16-20UN	.406	.406	.44	.94	.94	1.00	----
***5	***25	5/8	1/4	1/2	13/16-18UNS **7/16-24UNS	.531 .188	.531	.44 .25	.91	.84	1.06	----
***6	***26	5/8	3/8	1/2	13/16-18UNS **17/32-24UNS	.531 .312	.531	.44 .31	.96	.95	1.11	----
***7	***27	5/8	1/2	1/2	13/16-18UNS **11/16-20UN	.531 .406	.531	.44 .44	1.04	1.04	1.19	----
* 8	*28	5/8	5/8	1/2	13/16-18UNS	.531	.531	.44	1.10	1.10	1.25	----

* Standard sizes.
*** These items are inactive for new design after 30 December 1971.

NOTES:

1. MATERIAL: Brass in accordance with procurement specification.
2. PROTECTIVE COATING: None
3. DIMENSIONS AND TOLERANCES: Dimensions and tolerances not shown shall be in accordance with the SAE Standard for Spherical Sleeve (Compression) Tube Fitting (SAE J246).
4. THREADS: Threads shall be in accordance with Screw-Thread Standards for Federal Services, Handbook H28.
5. PART NUMBER: The MS part number consists of the MS number, plus the dash number.
   A. For complete assembly (with nuts and sleeves), use the MS number, plus the assembly dash number. Example: MS39191-1.
   B. For the body only, use the MS number, plus the body dash number. Example: MS39191-21.
6. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
7. Reference documents shall be of the issue in effect on date of invitations for bid.
8. The illustration is for identification and is not intended to restrict design or shapes not dimensioned.
**9. For M_1 end of the dash numbers 5, 6 and 7, see dimensional data following their asterisked thread designations under column B.
10. At manufacturer's option, through passages may conform with the smaller diameter specified or be counterbored to the larger diameter from the appropriate end for depth S_1.
11. Previously inactive bodies, dash numbers 21, 22, 23, 24 and 28, are now active for design only; normally for replenishment the complete assembly should be requisitioned.

(G) CANCELLED -Procurement Use SAE J246

APPROVED 3 APR 62 REVISED (A) 22 OCT 64 (B) 27 FEB 67 (C) 12 NOV 68 (D) 30 DEC 71 (E) 25 FEB 75 (F) 10 DEC 76 (G) 24 OCT 86

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AR Other Cust	TITLE TEE, PIPE TO TUBE, MALE PIPE END ON RUN, FOR AIR LINES — SPHERICAL SLEEVE	MILITARY STANDARD MS39191
PROCUREMENT SPECIFICATION MIL-F-45911	SUPERSEDES: CFEX4	SHEET 1 OF 1

DD FORM SEP 87 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 4730-0840

AMSC/NA

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:48Z
Check the source to verify that this is the current version before use.