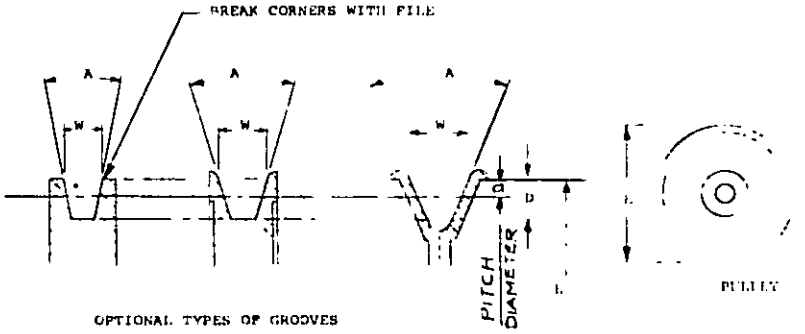


OPTIONAL TYPES OF GROOVES

PULLEY GROOVE DIMENSIONS AND TOLERANCES _ INCHES

PULLEY GROOVE DIMENSIONS AND TOLERANCES - INCHES

Cross section	E Effective Diameter Range 1/	A Groove Angle ±0.33°	W Groove Width	D Groove Depth Min.	2a
2L	Less than 1.50 1.50 to & incl. 1.99 2.00 to & incl. 2.50 Over 2.50	32 34 36 38	0.240 ±0.004	0.240	0.04
3L	Less than 2.20 2.20 to & incl. 3.19 3.20 to & incl. 4.20 Over 4.20	32 34 36 38	0.364 ±0.005	0.350	0.06
4L	Less than 2.65 2.65 to & incl. 3.24 3.25 to & incl. 5.65 Over 5.65	30 32 34 38	0.490 ±0.005	0.470	0.10
3L/4L	Less than 2.65 2.65 to & incl. 3.24 3.25 to & incl. 5.65 Over 5.65	30 32 34 38	0.490 ±0.005	0.590	3L-0.50 4L-0.10
5L	Less than 3.95 3.95 to & incl. 4.94 4.95 to & incl. 7.35 Over 7.35	30 32 34 38	0.630 ±0.006	0.550	0.16
4L/5L	Less than 3.95 3.95 to & incl. 4.94 4.95 to & incl. 7.35 Over 7.35	30 32 34 38	0.630 ±0.006	0.670	4L-0.59 5L-0.16

1/ OUTSIDE DIAMETER (O.D.) TOLERANCE OF PRODUCT = EFFECTIVE O.D. ± 0.020 INCH. FOR EACH ADDITIONAL INCH OF O.D. ADD ± 0.001 INCH.

ENTIRE STANDARD REVISED

APPROVED 22 JUNE 1981 REVISED (A) 22 JUNE 1981

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Other Cust	MR YD 99	TITLE PULLEY, GROOVED, FRACTIONAL HORSEPOWER	MILITARY STANDARD MS39239
PROCUREMENT SPECIFICATION NONE	SUPERSEDES		SHEET 1 OF 2

DD FORM 672-1 (Coordinated)

3020-0101

☆ U.S. GOVERNMENT PRINTING OFFICE: 1981 0 — 703-023/5121

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.

PULLEY GROOVE DIMENSIONS AND TOLERANCES - MILLIMETERS

Cross section	E Effective Diameter Range 1/	A Groove Angle ±0.33°	W Groove Width	D Groove Depth Min.	2a
6R	Up through 45 Over 45 to & incl. 65 Over 65	32 34 38	6 ± 0.01	6	1.0
9R	Up through 65 Over 65 to & incl. 105 Over 105	32 34 38	9 ± 0.13	9	1.5
13R	Up through 80 Over 80 to & incl. 140 Over 140	30 34 38	13 ± 0.13	12	4.3
9R/13R	Up through 80 Over 80 to & incl. 140 Over 140	30 34 38	13 ± 0.13	15	9R-13.8 13R-4.3
16R	Up through 140 Over 140 to & incl. 180 Over 180	30 34 38	16 ± 0.15	14	4.1
13R/16R	Up through 140 Over 140 to & incl. 180 Over 180	30 34 38	16 ± 0.15	17	13R-14.1 16R-4.1

1/ OUTSIDE DIAMETER (O.D.) TOLERANCE UP THROUGH 100 MM O.D., ± 0.1MM. FOR EACH ADDITIONAL 25 MM OF O.D., ADD ± 0.12 MM.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).

2. THIS IS A DESIGN STANDARD AND SHALL NOT BE USED AS A PART NUMBER.

APPROVED 31 AUGUST 1964 REVISED (A) FOR CHANGES SEE SHEETS 1 AND 2

P A	MI	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust	NI		PULLEY, GROOVE: FRACTIONAL HORSEPOWER	MS39239
	YD			
PROCUREMENT SPECIFICATION		SUPERSEDES		SHEET 2 OF 2

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.