
MS9276

FED SUP CLASS
5310

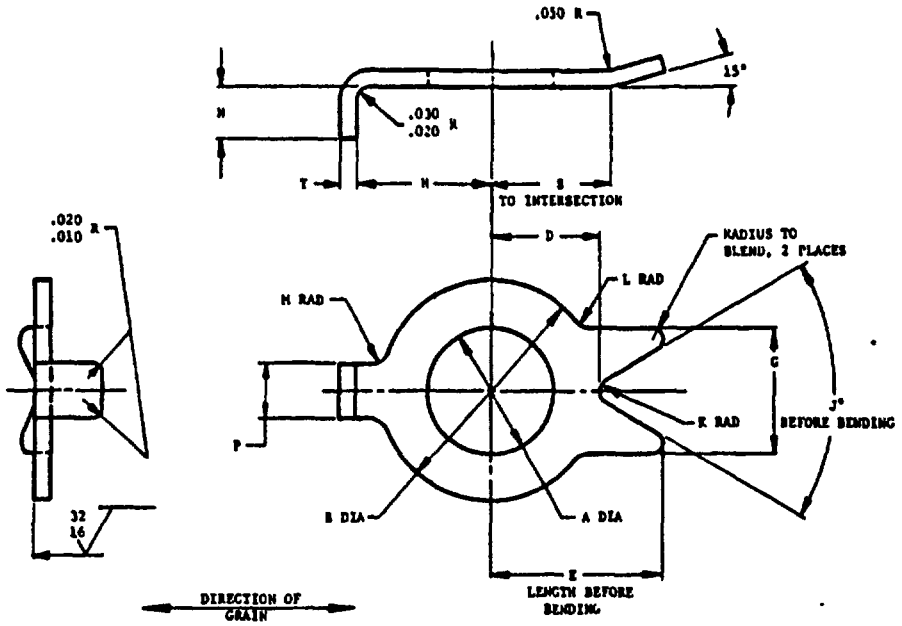

PART NO.	NOM SIZE	A +.005 -.000	B +.010 -.000	D +.005 -.000	E ± 010 - 000	G +.010 -.000	H ±.005	J ±2°	K	L	M	N +.010 -.000	P +.005 -.000	S ±.005	T	APPROX WEIGHT LB/100
MS9276-08	.164	.170	.310	160	.275	.175	.186	50°	.015	.037	.037	080	.080	.180	.019-.025	.041
MS9276-09	.190	.195	.370	.190	.295	.200	226	60°	.015	.037	.037	095	110	.210	.019-.025	.065
MS9276-10	.250	.255	.440	220	.350	.230	.270	60°	.025	.040	.040	.100	.110	.240	.028-.036	.128
MS9276-11	.312	320	.495	.250	.410	.280	.330	60°	.030	.040	.050	.100	.140	.280	.028-.036	.160
MS9276-12	.375	.390	.560	.280	.450	.320	.370	60°	.030	.040	.050	.140	.140	.320	.028-.036	.182
MS9276-13	.438	.450	.685	.345	.525	.390	.420	60°	.045	.040	.050	.150	.170	.380	.032-.040	.246
MS9276-14	.500	.515	.745	.375	590	.425	.470	60°	.050	.050	.050	.150	.200	.420	.032-.040	.396
MS9276-15	.562	575	.870	.440	.640	.500	545	80°	.050	.050	.075	.150	.200	.480	.032-.040	.332
MS9276-16	625	.640	.930	.470	.680	530	.570	80°	.050	.050	.075	.150	.200	500	.032-.040	.392
MS9276-17	.750	.765	1.055	530	.730	.550	.670	90°	.050	.060	.100	.150	.230	.570	.032-.040	.709
MS9276-18	875	.890	1.245	.625	.860	600	.795	90°	.050	.060	.100	.150	260	.680	.032-.040	.821
MS9276-19	1 000	1 015	1.430	.715	.950	.650	.870	90°	.100	.060	.100	.150	.290	780	.032-.040	1.060

1. MATERIAL: CORROSION RESISTANT STEEL AMS 5510.
(B) 2. HEAT TREATMENT FORMED WASHERS SHALL BE STRESS RELIEVED AT 1600 F ± 25 FOR 30 MINUTES IN A PROTECTIVE ATMOSPHERE FOLLOWED BY AIR COOL.
3. SURFACES WITHIN DIA B ARE TO BE FLAT WITHIN .005 AND OF UNIFORM THICKNESS WITHIN .002.
4. DIA A AND B TO BE CONCENTRIC WITHIN .010 FIR
5. REMOVE BURRS AND SHARP EDGES.
(B) 6. SURFACE TEXTURE ANSI B46.1-1962; UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES.
7. IDENTIFICATION MARK PART NUMBER AND MANUFACTURER'S IDENTIFICATION ON CONTAINER.
8. DIMENSIONS IN INCHES UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010 ANGULAR DIMENSIONS ± 5°.
9. DO NOT USE UNASSIGNED PART NUMBERS.

AS & AIS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 15 Mar 65 REVISED (A) 1 Aug 68 (B) 12 Jan 73

Review activities:
Navy – SH, CG, (XH)
Air Force – 11

This military standard is approved by the Department of the Air Force and the Bureau of Naval Weapons and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

P.A. USAF – 82 Other Cust NAVY – AS ARMY – AV	TITLE WASHER, KEY-CRES, AMS 5510, 180° LOCKING	MILITARY STANDARD MS9276
PROCUREMENT SPECIFICATION NONE	SUPERSEDES	SHEET 1 OF 1

DD FORM 1 OCT 67 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5310-0567
ASD use only

☆U S GOVERNMENT PRINTING OFFICE 1981 — 703-023/6980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:14Z
Check the source to verify that this is the current version before use.