NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-27/79
29 August 1975

PERFORMANCE SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, TF5S21ZZ896

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

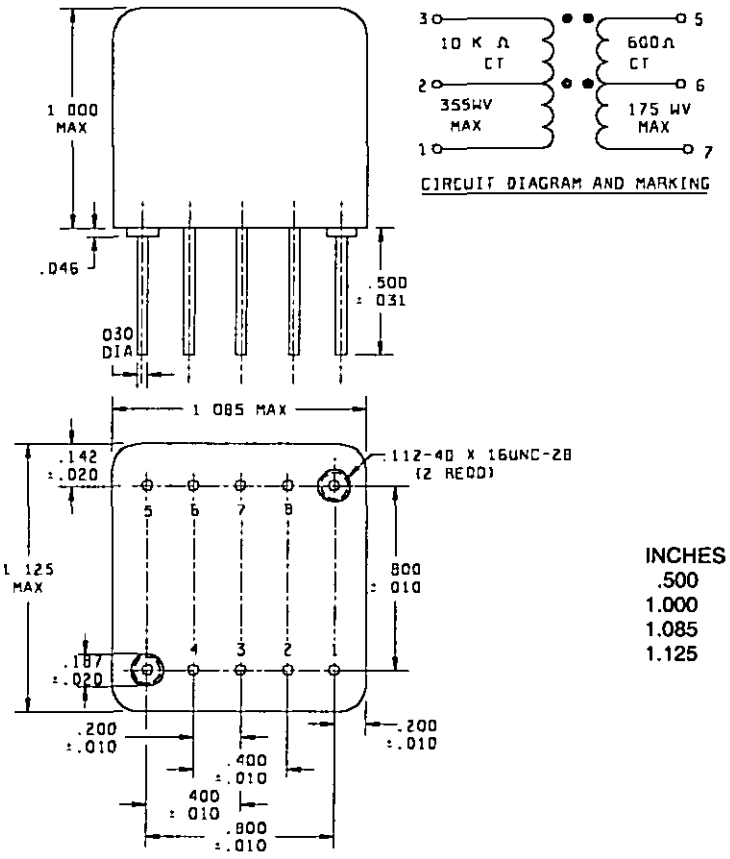

INCHES	MM
.500	12.70
1.000	25.40
1.085	27.56
1.125	28.58

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Marking shall be on the top of the case.

FIGURE 1. Dimensions and configurations.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses, i.e , (1-2) are used, they indicate the winding and the extreme terminals of the winding)

Electrical ratings.
Source impedance (1-3) 10K ohms ct ±10 percent
Load impedance (5-7) 600 ohms ct.
Primary power level. 6 watts maximum (200 Hz to 10 kHz), 25 watt (60 Hz to 200 Hz)
Primary DC current 1 mA maximum
Working voltage
(1-3). 355 volts maximum
(5-7) 175 volts maximum

Design and construction
Dimensions and configuration. See figure 1
Duty cycle: Continuous
Case. Encapsulated
Material Epoxy glass.
Terminals. Pin type, Dumet, hot tin dipped
Weight: 2.5 ounces maximum
Operating temperature range -55°C to 130°C

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage (at sea level)
1000 volts rms (1-3) and 500 volts rms (5-7)

Electrical characteristics
Harmonic distortion Not more than ±10 percent at 6 watts, 200 Hz to 10 kHz across (5-7)
Primary impedance (1-3) 10K ohms ct ±10 percent at 1 kHz
Secondary load impedance (5-7) 600 ohms ct
Frequency response 60 Hz to 10 kHz ±1 dB maximum
DC resistance
Primary (1-3) 700 ohms ±25 percent
Secondary (5-7) 50 ohms ±25 percent
No load (center tap (ct) voltage unbalance only)
With 50 volts, 60 Hz and 0 amp voltage unbalance dc applied to (1-3)
Unbalance (1-2) and (2-3) ±1 percent maximum
Unbalance (5-6) and (6-7) ±1 percent maximum
Polarity Additive, with terminals 3 and 5 connected

Temperature rise 45°C

Vibration, high frequency MIL-STD-202, method 204, test condition B

Shock (specified pulse) MIL-STD-202, method 213, test condition H

Marking location See figure 1
Part number M27/79-01

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:28Z
Check the source to verify that this is the current version before use.

Custodians
Army - EL
Navy - EC
Air Force - 85

Review activities
Army - EL, MI, SG
Navy - EC, SH, OS
Air Force - 11, 17, 80
DSA - ES

User activities
Army - MU, WC, SG, ME
Navy - MC, AS, SH, OS
Air Force - 19

Preparing activity
Army - EL

Agent:
DSA - ES

(Project 5950-0499-3)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side staple in corner and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-T-27/79 TRANSFORMER, AUDIO FREQUENCY, TF5S21ZZ896

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes" in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-PM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: AMSEL- RD-TS
Fort Monmouth, New Jersey 07703

FOLD

To detach this form, cut along this line

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:28Z
Check the source to verify that this is the current version before use.