

MILITARY SPECIFICATION SHEET

TRANSFORMER, AUDIO FREQUENCY, TF5R21ZZ895

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the transformer described herein shall consist of this document and the latest issue of Specification MIL-T-27.

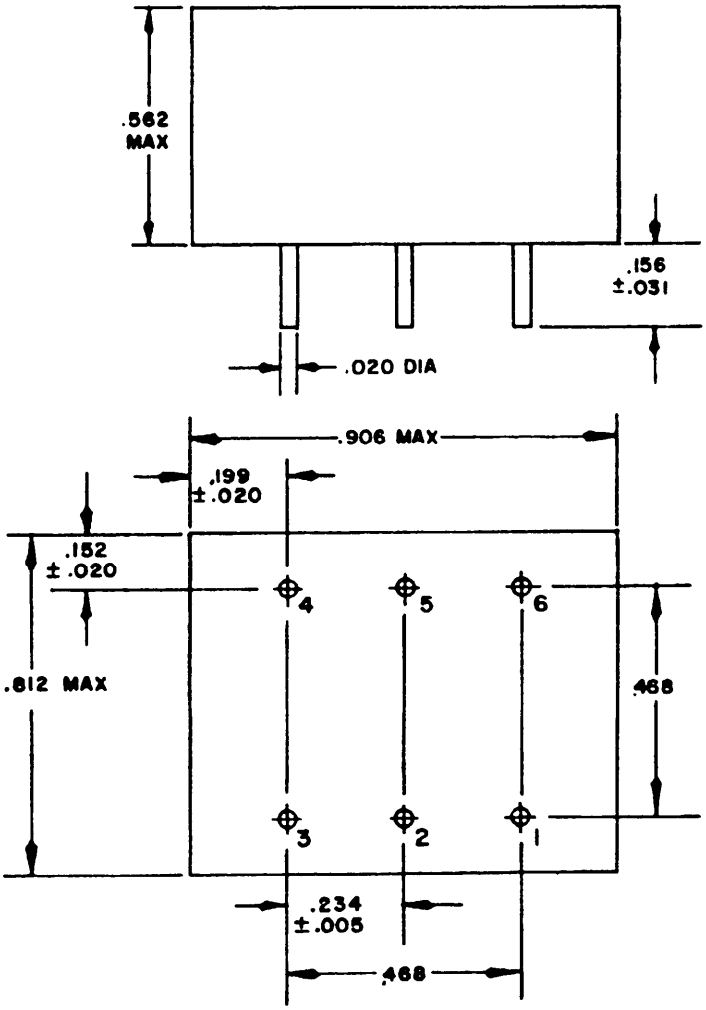



CIRCUIT DIAGRAM AND MARKING

INCHES	MM
.156	3.96
.562	14.27
.812	20.62
.906	23.01

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Marking shall be on top of the case.

FIGURE 1. Dimensions and configurations.

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:
Source impedance (1-3): 4K ohms ct ±15 percent.
Load impedance (4-6): 600 ohms ct.
Primary power level: .631 watt maximum.
Working voltage:
(1-3): 80 volts maximum.
(4-6): 28 volts maximum.

Design and construction:
Dimensions and configuration: See figure 1.
Duty cycle: Continuous.
Case: Encapsulated.
Material: Diallyl phthalate.
Terminals: Pin type, Dumet, hot tinned dip.
Weight: 0.5 ounce maximum.
Operating temperature range: -55°C to 105°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage (at sea level): 500 volts rms.

Electrical characteristics:
Primary impedance: 4K ohms ct +15 percent.
Secondary load impedance: 600 ohms ct.
Primary current (1-2): .005 ampere dc.
DC resistance:
Primary (1-3): 340 ohms ±20 percent.
Secondary (4-6): 55 ohms ±20 percent.
Frequency response: 200 Hz to 15 kHz ±2 dB.
Primary DC unbalance: 5 mA.
No load (center tap (ct) voltage unbalance only):
With 25 volts, 100 Hz and 0 amp dc applied to (1-3):
Unbalance (1-2) and (2-3): ±1 percent maximum.
Unbalance (4-5) and (5-6): ±1 percent maximum.
Polarity: Additive, with terminals 3 and 4 connected.

Vibration, high frequency: MIL-STD-202, method 204, test condition B.

Shock (specified pulse): MIL-STD-202, method 213, test condition H.

Marking location: See figure 1.
Part number: M27/78-01.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MI, SG
Navy - EC, SH, OS
Air Force - 11, 17, 80
DSA - ES

User activities:
Army - MU, WC, SG, ME
Navy - MC, AS, SH, OS
Air Force - 19

Preparing activity:
Army - EL

Agent:
DSA - ES

(Project 5950-0499-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:27Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET	Form Approved Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION MIL-T-27/78 TRANSFORMER, AUDIO FREQUENCY, TF5R21ZZ895

ORGANIZATION

CITY AND STATE | CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?
   ☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)* | DATE

DD FORM 1 JAN 66 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:27Z
Check the source to verify that this is the current version before use.