INCH-POUND

MIL-T-27/82B
20 April 1993
SUPERSEDING
MIL-T-27/82A
25 April 1988


MILITARY SPECIFICATION SHEET

TRANSFORMER, POWER, STEPDOWN, TF5V03ZZ899


(B) Inactive for new design after the date of this specification.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-T-27.

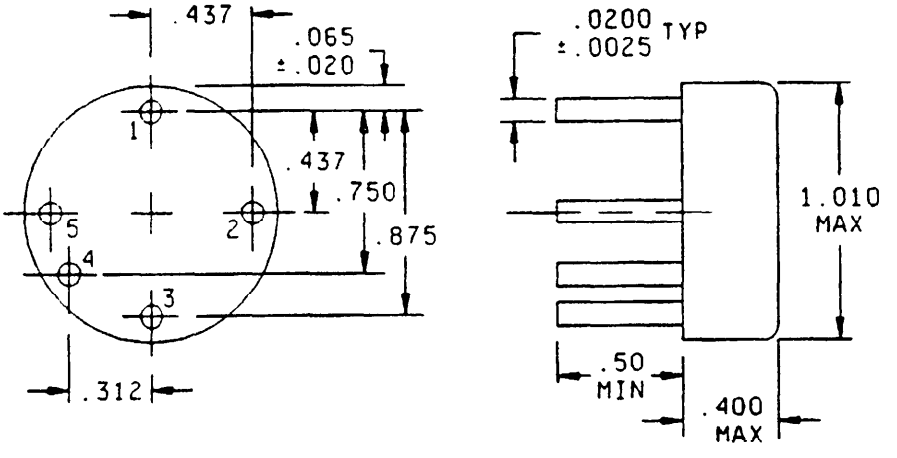


CIRCUIT DIAGRAM
AND MARKING

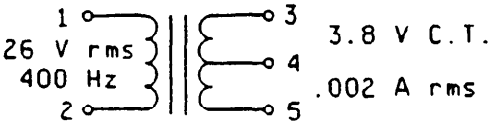


WV: 50 V MAX
ALTITUDE: 70,000 FT MAX

FIGURE 1. Dimensions and configurations.

(B) denotes changes


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:28Z
Check the source to verify that this is the current version before use.

| Inches | mm |
|---|---|
| .0025 | 0.064 |
| .020 | 0.51 |
| .065 | 1.65 |
| .312 | 7.92 |
| .400 | 10.16 |
| .437 | 11.10 |
| .500 | 12.70 |
| .750 | 19.05 |
| .875 | 22.23 |
| 1.010 | 25.65 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Tolerance on terminal position dimensions is ±.005 (0.13 mm).
4. Marking shall be on top or side of the case.

FIGURE 1. Dimensions and configurations - Continued.

REQUIREMENTS: (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings:

Primary voltage (1-2): 26 V, 400 Hz.

Primary power: 0.008 VA.

Primary current: 0.0003 ampere rms.

Secondary voltage (3-5): 3.8 V ct, 0.002 ampere rms.

Working voltage:

(1-2): 50 V maximum.

(3-5): 50 V maximum.

DC resistance:

(1-2): 35 ohms maximum.

(3-5): 6 ohms maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Altitude: 70,000 feet maximum.



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

Terminals: Solderable, printed circuit pins.

Terminal height: .5 inch minimum.

Weight: 15.4 grams maximum.

Operating temperature range: -55°C to +155°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Dielectric withstanding voltage:

At sea level: 100 V rms.

At barometric pressure: 100 V rms.

Electrical characteristics:

No load: With 26 V, 400 Hz across (1-2), current in (1-2) shall not exceed 4 mA.

Voltage across (3-4)(4-5): 1.91 V rms ±1 percent.

Rated load: With 26 V, 400 Hz across (1-2), the voltage across (3-5) shall be 3.8 V ct ±1 percent.

Saturation: With 26 V rms, 400 Hz across (1-2) and 0.005 A dc in (3-4), core shall not saturate.

Polarity: Additive with terminals 2 and 3 connected.

(B) Quality assurance provisions:

Qualification inspection: Not applicable for this specification sheet.

Quality conformance inspection: Groups A and B tests of MIL-T-27 shall be applicable.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/82-01.

## CONCLUDING MATERIAL

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities:
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity:
Army - ER

Agent:
DLA - ES

(Project 5950-0815-01)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.