INCH-POUND

MIL-T-27/84B
20 April 1993
SUPERSEDING
MIL-T-27/84A
25 April 1988

MILITARY SPECIFICATION SHEET

TRANSFORMER, AND INDUCTORS (AUDIO, POWER AND HIGH-POWER PULSE), INDUCTOR, POWER, TYPE TF5S04ZZ901

(B) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

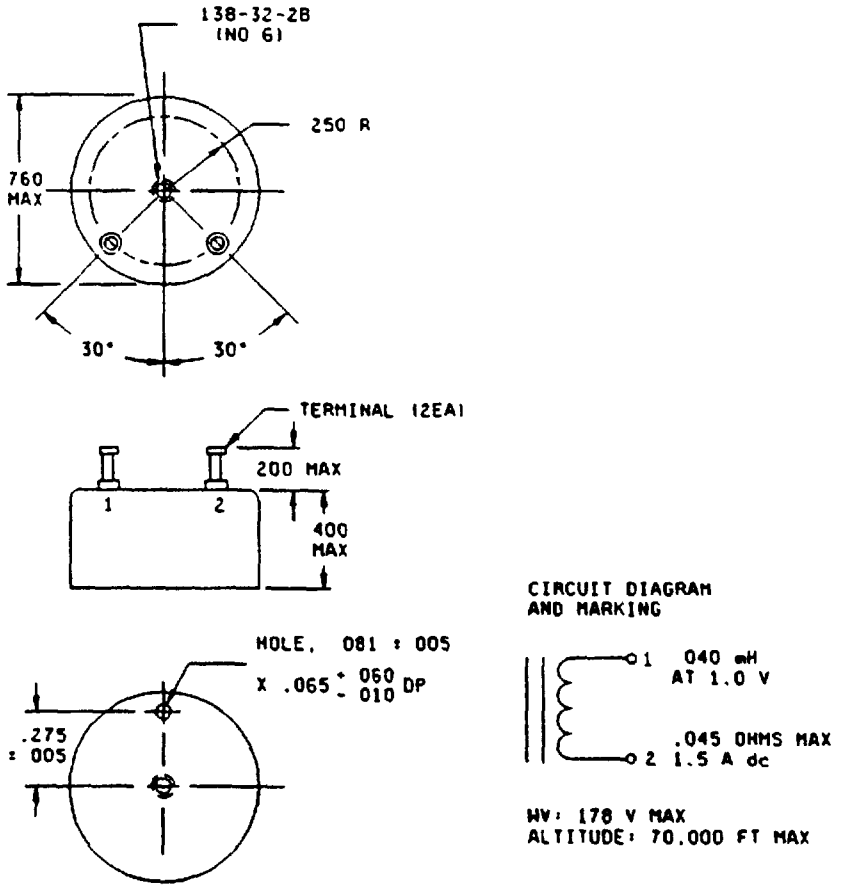


FIGURE 1 Dimensions and configurations

(B) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

Inches	mm
005	0 13
010	0 25
060	1 52
065	1 65
.081	2 06
138	3.51
200	5 08
250	6.35
275	6 99
400	10 16
760	19 30

NOTES
1 Dimensions are in inches
2 Metric equivalents are given for general information only
3 Tolerance on terminal position dimensions is ±2°
4 Marking shall be on side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i e , (1-2) are used, they indicate the winding and the extreme terminals of the windings)

Electrical ratings

Inductance (1-2) 0 040 mH +8, -12 percent

Voltage (1-2) 1 V rms, 20 kHz

Power 0 101 watt

Current (1-2) 1 5 amperes dc

DC resistance (1-2) 0 045 ohm dc maximum

Working voltage 178 V maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material· Epoxy

Altitude 70,000 feet maximum

Terminals Solder type, brass, solder plate finish, USECO part number 2010A-4, or equal

Weight 9 grams

Operating temperature range -55°C to +130°C

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds

Source: https://assist.dla.mil -- Downloaded: 202640-16T03:28Z
Check the source to verify that this is the currentversion before use.

Dielectric withstanding voltage

At sea level 500 V rms

At barometric pressure 100 V rms

Electrical characteristics

Inductance With 1 V rms, 20 kHz across, and 1 5 amperes dc applied to (1-2) the inductance shall be 0 040 mH +8, -12 percent

Dc resistance at 25°C 0 045 ohm across (1-2) maximum

Self resonant frequency 0 5 mHz minimum

(B) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/84-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-02)

Source: https://assist.dla.mil -- Downloaded: 202610-16T03:28Z
Check the source to verify that this is the current version before use.