INCH-POUND

MIL-T-27/85B
28 April 2008
SUPERSEDING
MIL-T-27/85A
2 May 1977


DETAIL SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS (AUDIO, POWER, AND HIGH-POWER PULSE), INDUCTOR, POWER

Inactive for New Design
after 14 February 1997

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the products described herein shall consist of this specification and MIL-PRF-27.

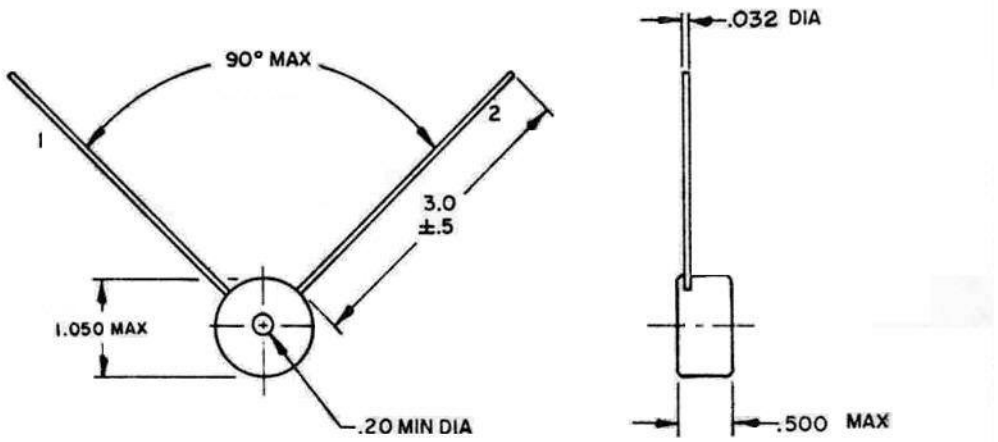

CIRCUIT DIAGRAM AND MARKING



374 µH MIN TO 506 µH MAX
1.0 V
10 kHz
.070 OHMS MAX
1.0 A dc

Inches	mm
.500	12.70
1.050	26.67

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Marking shall be on the side of the case.

FIGURE 1. Dimensions and configuration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS: (When numbers in parentheses, i.e. (1.-3) are used, they indicate the winding and the extreme terminals of the winding.)

Electrical ratings:

Inductance (1-2): 374 microhenrys minimum, 506 microhenrys maximum.

Voltage (1-2): 1 volt, 10 kilohertz.

Power: 0.07 watt.

Current (1-2): 1 ampere dc.

DC resistance (1-2): 0.070 ohm dc maximum.

Design and construction:

Dimensions and configuration: See figure 1.

Duty cycle: Continuous.

Case: Encapsulated.

Material: Epoxy.

Terminals: Solid wire lead, No. 20 AWG, tinned soft copper, magnet wire.

Weight: 27.5 grams maximum.

Operating temperature range: -55°C to +130°C.

Terminal strength: MIL-STD-202, method 211, test condition A, 2 pounds.

Terminal twist: MIL-STD-202, method 211, test condition D.

Dielectric withstanding voltage (at sea level): 100 volts rms.

Electrical characteristics:

Inductance: With 1 volt rms, 10 kilohertz across, and 1 ampere dc applied to (1-2) the inductance shall be 374 microhenrys minimum, 506 microhenrys maximum.

VERIFICATION:

Qualification inspection: Not applicable for this specification sheet.

Quality conformance inspection: Groups A and B tests of MIL-PRF-27 shall be applicable.

Marking location: See figure 1.

Part or Identifying Number (PIN): M27/85-01.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.

Changes from previous issue. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Referenced documents. In addition to MIL-PRF-27, this document references the following:

MIL-STD-202

Custodians:
Army – CR
Navy – EC
Air Force – 11
DLA - CC

Preparing activity:
DLA – CC

(Project 5950-2008-015)

Review activities:
Army – AR, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of this information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:28Z
Check the source to verify that this is the current version before use.