
MILITARY SPECIFICATION SHEET

TRANSFORMERS AND INDUCTORS
(AUDIO, POWER, AND HIGH-POWER PULSE),
INDUCTOR, POWER, 25'0422

(A)


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the inductor described herein shall consist of this document and the latest issue of Specification MIL-T-27.

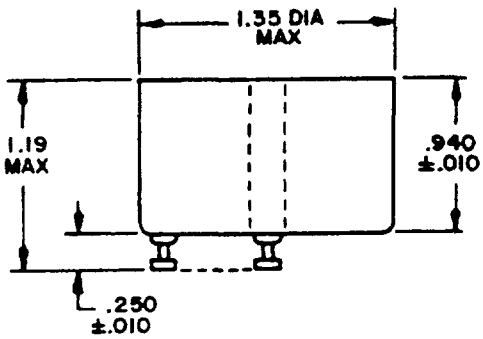


(A)

INCHES	MM
.002	.05
.005	.13
.010	.25
.170	4.32
.250	6.35
.940	23.88
1.19	30.2
1.35	34.3

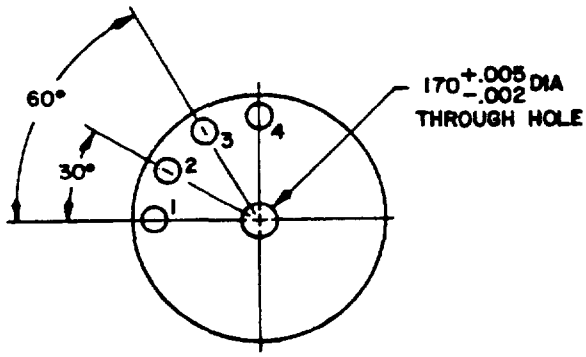

CIRCUIT DIAGRAM
AND MARKING



WV: 178 VOLTS MAX

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only and are based upon 1 00 inch = 25 4 mm
3. Tolerance on terminal angular position dimensions is ±5°.
4. Marking shall be on the side of the case.

FIGURE 1 Dimensions and configuration

(A) denotes changes

FSC 5950

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS (When numbers in parentheses i.e., (1-2) are used, they indicate the extreme terminals of the winding.)

Electrical ratings:
- Inductance
  - (1-2) 450 ±50 microhenrys.
  - (3-4) 450 ±50 microhenrys.
- Voltage
  - (1-2) 0 565 volt rms, 400 hertz.
  - (3-4) 0.565 volt rms, 400 hertz.
- Current.
  - (1-2) 0 5 ampere rms
  - (3-4) 0.5 ampere rms.
- DC resistance.
  - (1-2) 0.2 ohm maximum.
  - (3-4) 0 2 ohm maximum.
- Working voltage: 178 volts maximum.

Design and construction.
- Dimensions and configuration: See figure 1.
- Duty cycle Continuous.
- Case. Encapsulated.
  - Material. Epoxy.
- Terminals. Solder, turret type, USEC part number 2011A-5.5 or equal.
  - Terminal length. 0.250 ±0.010 inch.
- (A) Weight. 75 grams maximum.
- Operating temperature range. -55°C to +155°C.

Terminal strength MIL-STD-202, method 211, test condition A, 5 pounds.

Dielectric withstanding voltage (at sea level). 500 volts rms.

Electrical characteristics:
- Inductance With 0.565 volt rms, 400 hertz across applied to (1-2) or (3-4) the inductance shall be 450 ±50 microhenrys.
- DC resistance at 20°C. 0.2 ohm across (1-2) or (3-4).
- Self resonant frequency. 700 kilohertz minimum.

Marking location See figure 1.

Part number. M27/89-01.

Custodians
- Army - EL
- Navy - EC
- Air Force - 85

Review activities
- Army - MI
- Navy - SH, OS
- Air Force - 11, 17, 99
- DLA - ES

User activities:
- Army - MU, WC, ME
- Navy - MC, AS, SH, OS
- Air Force - 19

Preparing activity.
- Army - EL

Agent.
- DLA - ES

(Project 5950-0541-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:29Z
Check the source to verify that this is the current version before use.

To detach this form, cut along this line

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No 22-R255

INSTRUCTIONS This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost Comments and the return of this form will be appreciated Fold on lines on reverse side, staple in corner, and send to preparing activity Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements

SPECIFICATION MIL-T-27789A TRANSFORMERS AND INDUCTORS(AUDIO,POWER, AND HIGH-POWER PULSE),INDUCTOR,POWER, TF5V04ZZ

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1 HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2 COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3 IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4 REMARKS *(Attach any pertinent data which may be of use in improving this specification If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 68 1426 REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED

ESC-FM 1068-68

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:29Z
Check the source to verify that this is the current version before use.

FOLD

Department of the Army
Headquarters
U.S.Army Electronics Command
Fort Monmouth, New Jersey 07703

POSTAGE AND FEES PAID

OFFICIAL BUSINESS

Commanding General
U.S.Army Electronics Command
ATTN: [redacted] DRSEL-RD-TS
Fort Monmouth, New Jersey 07703

To detach this form, cut along this line

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:29Z
Check the source to verify that this is the current version before use.