
MILITARY SPECIFICATION SHEET

TRANSFORMERS, SATURABLE, TF5S40ZZ909

(A) Inactive for new design after the date of this specification

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation MIL-T-27

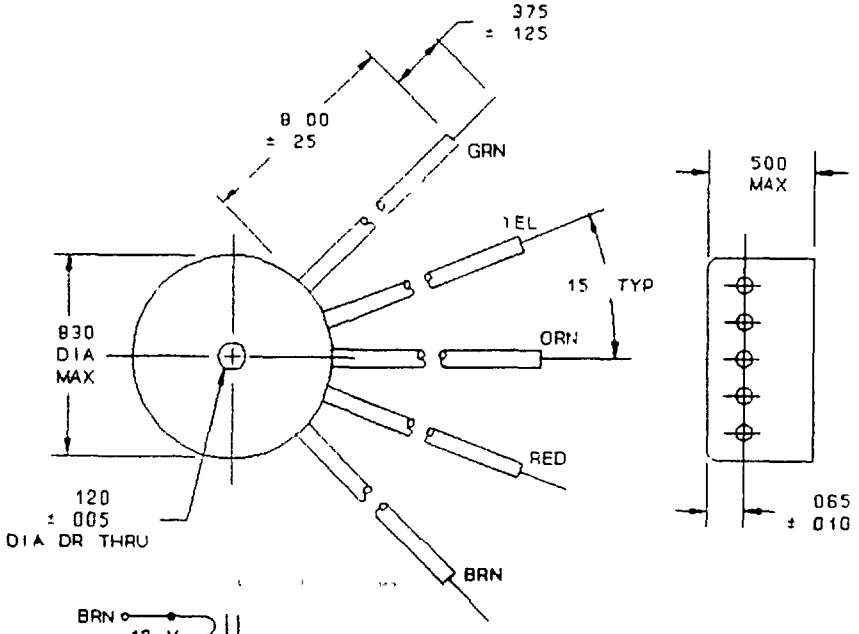

CIRCUIT DIAGRAM
AND MARKING

FIGURE 1 Dimensions and configurations

(A) denotes changes

DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

Inches	mm
500	12.70
830	21.08

NOTES
1. Dimensions are in inches
2. Metric equivalents are given for general information only
3. Tolerance on terminal position dimensions is ±1°
4. Marking shall be on side of the case

FIGURE 1 Dimensions and configurations - Continued

REQUIREMENTS (When numbers in parentheses, i.e., (1-2) are used, they indicate the winding and the extreme terminals of the windings.)

Electrical ratings

Primary voltage (BRN-ORN) 42 V, 8 kHz

Primary power 0.125 VA

Primary current 0.003 ampere rms

Secondary voltage (YEL-GRN) 5.15 V, 0.022 ampere rms

Working voltage

(BRN-ORN) 178 V maximum

(YEL-GRN) 178 V maximum

Design and construction

Dimensions and configuration See figure 1

Duty cycle Continuous

Case Encapsulated

Material Epoxy

Terminals Insulated wire leads, type E, #30 AWG, (7 strands #38), strip and tin 0.375 inch ±0.125, in accordance with MIL-W-16878

Terminal length 8.0 inches ± 25

Weight 13 grams

Operating temperature range -55°C to +130°C

Terminal strength MIL-STD-202, method 211, test condition A, 2 pounds

Dielectric withstanding voltage

At sea level 500 V rms

At barometric pressure 100 V rms

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.

Electrical characteristics

No load With 42 V, 8 kHz across (BRN-ORN), the voltage across (BRN-ORN), shall not exceed 1 mA

Voltage across (YEL-GRN) 5 17 V ±1 percent

Rated load With 42 V, 8 kHz across (BRN-ORN), the voltage across (YEL-GRN), shall be 5 15 V ±1 percent

Polarity Additive with terminals ORN and GRN connected

(A) Quality assurance provisions

Qualification inspection Not applicable for this specification sheet

Quality conformance inspection Groups A and B tests of MIL-T-27 shall be applicable

Marking location See figure 1

Part or Identifying Number (PIN) M27/92-01

CONCLUDING MATERIAL

Custodians
Army - ER
Navy - EC
Air Force - 85

Review activities
Army - MI
Navy - OS, SH
Air Force - 17, 80
DLA - ES

User activities
Army - AR, ME
Navy - AS, MC
Air Force - 19

Preparing activity
Army - ER

Agent
DLA - ES

(Project 5950-0815-03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T03:30Z
Check the source to verify that this is the current version before use.