
MIL-L-3661/32A
1 August 1968
SUPERSEDING
MIL-L-3661/32
27 March 1967

MILITARY SPECIFICATION SHEET

LENSES, INDICATOR-LIGHT (ROTATABLE), STYLE LC32

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the lenses described herein shall consist of this document and the latest issue of MIL-L-3661.

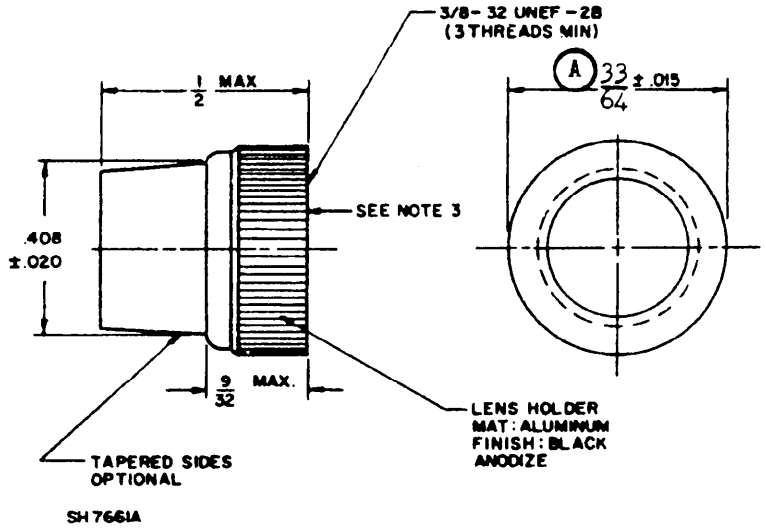

Inches	mm
.015	.38
.020	.51
9/32	7.14
3/8	9.53
.408	10.36
1/2	12.70
33/64	13.10

NOTES:

1. ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ± 1/32 INCH FOR FRACTIONS.

(A) Denotes change

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 20260-16T20:59Z
Check the source to verify that this is the current version before use.

2. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.

3. KNURL FLANGE RING DESIGN OPTIONAL.

REQUIREMENTS:

1. Design and construction: See figure.
2. Lens cap: Rotatable.
3. Temperature cycling: −55°C. to +71°C.

Type designation	Mating holder	Lens material	Transmittance	Lens color
LC32RT2	LH90/2	Plastic	Translucent	Red
LC32GT2	LH90/2	Plastic	Translucent	Green
LC32YT2	LH90/?	Plastic	Translucent	Yellow
LC32BT2	LH90/2	Plastic	Translucent	Blue
LC32WT2	LH90/2	Plastic	Translucent	White

Custodians:

Army-EL

Navy-EC

Air Force-11

Review activities:

Army-EL, MU

Navy- AS

Air Force-11, 85

User activities:

Army-AT, AV, ME

Navy-MC

Preparing activity:

Navy-EC

(Project 6210-0264)

Source: https://assist.dla.mil -- Downloaded: 202610-16T20:59Z
Check the source to verify that this is the current version before use.