INCH-POUND

MIL-DTL-3661/34C
24 January 2019


SUPERSEDING
MIL-L-3661/34B
9 June 1969

DETAIL SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS, AND INDICATOR-LIGHT (PLASTIC PLATE LIGHTING PANEL) DUSTTIGHT LENS, STYLE LC34

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet, the latest issue of MIL-DTL-3661.

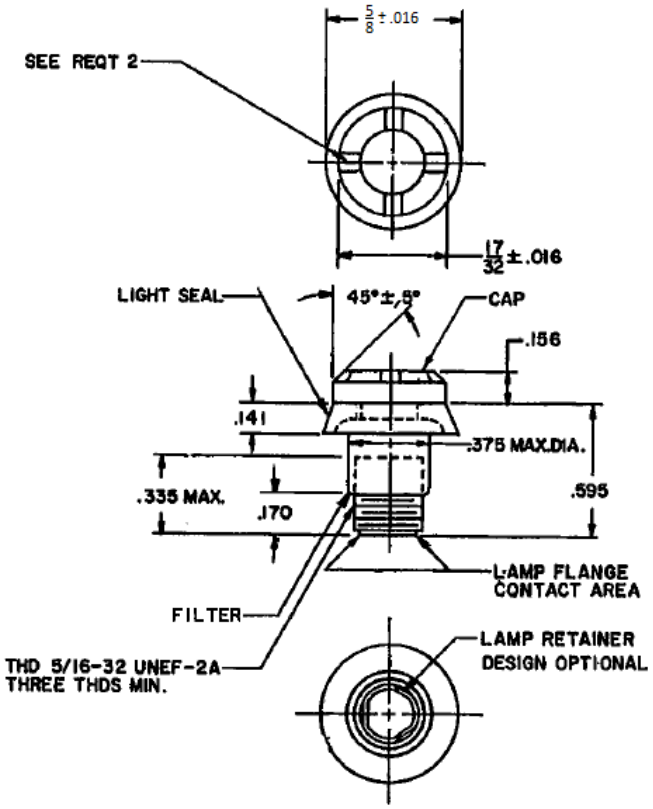

inches	mm
.016	.41
.141	3.58
.156	3.96
.170	4.32
5/16	7.94
.335	8.61
.375	9.53
17/32	13.49
.595	15.11
5/8	15.88

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:00Z
Check the source to verify that this is the current version before use.

NOTES:

1. All dimensions are in inches. Unless otherwise specified, tolerances are ± 1/32 inch for fractions and ±0.016 inch for decimals.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.

REQUIREMENTS:

1. Design and construction: see figure.
2. Cap protruding segment design optional provide that a minimum of four are located equally around the edge of the cap.
3. The light seal washer shall be fabricated from rubber and shall be capable of being replaced.
4. The lens shall accommodate one T-1-3/4 midget flange base incandescent lamp in accordance with MIL-DTL-6363/8, or equivalent.
5. Temperature cycling: -55°C to +71°C.
6. Ozone: In accordance with MIL-L-7806.
7. Sand and Dust: (Dust tight).

Type Designation	Mating holder	Cap and filter	Filter Color – Transmittance	Cap assembly Top color	Light seal Washer color
LC34EN2/DO2	LH92/1[3]	Plastic	Red – Nondiffusing	Black[1]/opaque	Black opaque
LC34CN2/DO2	LH92/1[3]	Plastic	Colorless – Nondiffusing	Black[1]/opaque	Black opaque
LC34CN2/EN2	LH92/1[3]	Plastic	Colorless – Nondiffusing	Red – nondiffusing	Black opaque
LC34EN2/EN2	LH92/1[3]	Plastic	Red – Nondiffusing	Red – nondiffusing	Black opaque
LC34EN2/SO2	LH92/1[3]	Plastic	Red – Nondiffusing	Gray[2]/opaque	Gray opaque
LC34CN2/SO2	LH92/1[3]	Plastic	Colorless - Nondiffusing	Gray[2]/opaque	Gray opaque

[1] Black in accordance with SAE AMS-STD-595, color number 37038.
[2] Dark grey in accordance with SAE AMS-STD-595, color number 36231.
[3] In accordance with MIL-L-3661/51

Referenced documents. In addition to MIL-DTL-3661, this document references the following:
SAE AMS-STD-595
MIL-DTL-6363/8
MIL-L-3661/51
MIL-L-7806

CHANGES FROM PREVIOUS ISSUE. The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:00Z
Check the source to verify that this is the current version before use.

Custodians:
Army – CR
Navy – AS
Air Force – 99

Preparing activity:
DLA – GS2

(Project No. 6210-2019-003)

Review Activity:
DLA – IS

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:00Z
Check the source to verify that this is the current version before use.