INCH-POUND

MIL-DTL-3661/39D
22 October 2018
MIL-L-3661/39C
15 February 1973

MILITARY SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS,
AND INDICATOR-LIGHT LENSES
INDICATOR LIGHTS, 2 LAMP, DISPLAY TYPE, STYLE LHC81

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

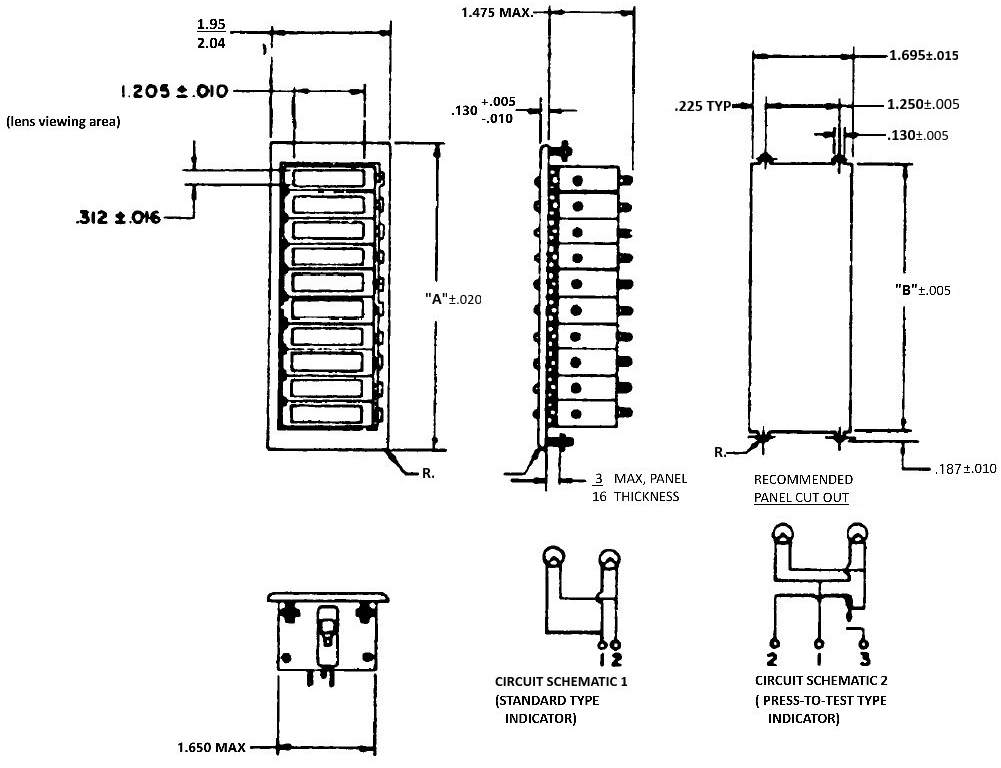


FIGURE 1. Design and Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

inches	mm	inches	mm	inches	mm
0.005	0.13	0.130	3.30	1.250	31.75
0.010	0.25	0.187	4.75	1.475	37.47
0.015	0.38	3/16	4.76	1.650	41.91
0.016	0.41	0.225	5.72	1.695	43.05
0.20	0.51	0.312	7.92	1.95	49.53
		1.205	30.61	2.04	51.82

NOTES:

1. All dimensions are in inches. Tolerances are as shown on figure 1.
2. Metric equivalents (to the nearest 0.01MM) are given for general information only and are based upon 1 inch = 25.4mm.
3. Housing and terminal design optional provided the dimensions fall within the configuration shown.

GOVERNMENT DOCUMENTS.

MIL-DTL-6363/8 HOUSINGS, INDICATOR-LIGHT, STYLE LH76

REQUIREMENTS:

1. Design and construction: see figure 1.
2. Each station shall accommodate two T-1-3/4 midget flange base lamps in accordance with MIL-DTL-6363/8, or equivalent.
3. Mounting hardware: Vendor shall supply suitable hardware as required for panel accommodation up to 3/16 inch thick.
4. Press-to-test operation: As applicable, see table I.
5. Circuit continuity: As applicable, see table I.
6. Lens torque: Not applicable.
7. Sand and dust test: Not applicable.

TABLE I

Type designation *	Circuit type 1- Standard 2- Press-to-test (see figure for schematic)	Number of stations	Dim. "A"	Dim. "A" Millimeters	Dim. "B"	Dim. "B" Millimeters
LHC81/1	1	1	1.063	27.00	0.610	15.49
LHC81/2	1	2	1.504	38.20	1.040	26.42
LHC81/3	1	3	1.944	49.38	1.480	37.59
LHC81/4	1	4	2.384	60.55	1.920	48.77
LHC81/5	1	5	2.824	71.73	2.360	59.94
LHC81/6	1	6	3.264	82.91	2.800	71.12
LHC81/7	1	7	3.704	94.08	3.240	82.30
LHC81/8	1	8	4.144	105.26	3.680	93.47
LHC81/9	1	9	4.584	116.43	4.120	104.65
LHC81/10	1	10	5.024	127.61	4.560	115.82
LHC81/11	2	1	1.063	27.00	0.610	15.49
LHC81/12	2	2	1.504	38.20	1.040	26.42
LHC81/13	2	3	1.944	49.38	1.480	37.59

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

TABLE I (continued)

Type designation *	Circuit type 1- Standard 2- Press-to-test (see figure for schematic)	Number of stations	Dim. "A"	Dim. "A" Millimeters	Dim. "B"	Dim. "B" Millimeters
LHC81/14	2	4	2.384	60.55	1.920	48.77
LHC81/15	2	5	2.824	71.73	2.360	59.94
LHC81/16	2	6	3.264	82.91	2.800	71.12
LHC81/17	2	7	3.704	94.08	3.240	82.30
LHC81/18	2	8	4.144	105.26	3.680	93.47
LHC81/19	2	9	4.584	116.43	4.120	104.65
LHC81/20	2	10	5.024	127.61	4.560	115.82

*For complete type designation, see ordering data in this specification sheet.

CONFORMANCE INSPECTION:

Group submission:

TABLE II

Type Designation	Tests MIL-DTL-3661	Extent of approval
LHC81/10	(4 sample units) All tests of table IV	All
LHC81/20	(4 sample units) All tests of table IV	
LHC81/1 through LHC81/9 and LHC81/11 through LHC81/19	(1 sample unit each) Group I of table IV (Visual and mechanical examination only)	

APPLICATION NOTES:

1. If replacement of a lens is required, the lens should be procured from the original manufacturer. It is not recommended that these lenses be stocked.
2. Lenses shall be suitable for legend presentation.

ORDERING DATA:

(a) Basic assembly shall be in accordance with table I. (This includes the type of frame, number of stations, and electrical circuits).

(b) The color, transmittance, and type of material of the lens shall be specified in the order of assembly presentation, that is, top to bottom. The following method shall be used:

LHC81/BT2*
LHC81/RT2

* This will procure a two station array, with the first station lens color blue, translucent, plastic symbol 2; the second station would be a red, translucent plastic lens, symbol 2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 99

Preparing Activity:
DLA - GS2

(Project 6210-2019-001)

Review Activity:
Air Force - 71
Army - CR4
Navy – MC

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.