MIL-L-3661/40A
14 July 1969
SUPERSEDING
MIL-L-3661/40
27 March 1967

MILITARY SPECIFICATION SHEET


# LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES


~~INDICATOR-LIGHT (NON-REMOVABLE), STYLE LHC82~~

Ⓐ (ELECTROMAGNETIC INTERFERENCE AND NON-ELECTROMAGNETIC TYPES)

This specification is mandatory for use by all Departments and agencies of the Department of Defense.

The complete requirements for procuring the indicator light described herein shall consist of this document and the latest issue of MIL-L-3661.

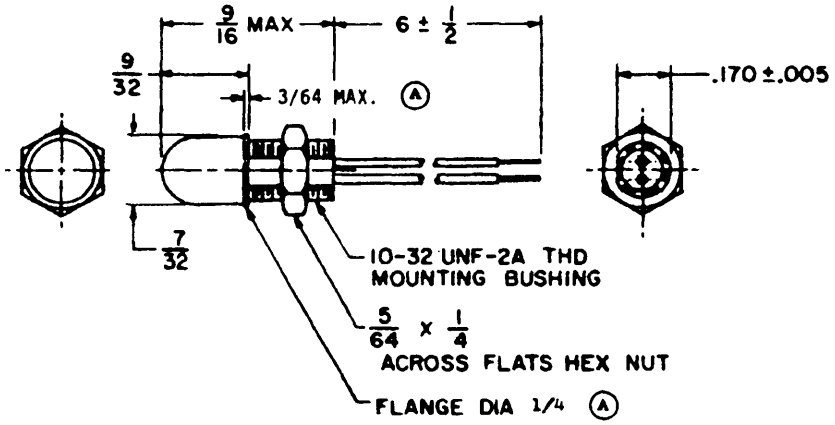


RECOMMENDED MOUNTING HOLE

EC 144

| inches | mm | inches | mm |
|---|---|---|---|
| | | .193 | 4.90 |
| .003 | .08 | 7/32 | 5.56 |
| .005 | .13 | 1/4 | 6.35 |
| .015 | .38 | 9/32 | 7.14 |
| 3/64 | 1.19 | 1/2 | 12.70 |
| 5/64 | 1.98 | 9/16 | 14.29 |
| .08 | 2.03 | 6 | 152.40 |
| .170 | 4.32 | | |

Ⓐ denotes changes



FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

* equivalents (to the nearest .01 mm) are given for general information only

NOTES:
1. ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±.005 INCH FOR DECIMALS.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.

REQUIREMENTS:

1. Design and construction: See figure.
2. Dielectric withstanding voltage: Sea level: 500 volts r.m.s. at 60 Hz.
3. Bushing torque: 8 pound-inches.
4. (A) Lamp (non-replaceable): MS24367-683 (5 volts).
5. Shock: Method II.
6. Wire leads shall be in accordance with MS21985-26.
7. Threaded stud case shall be fabricated from a corrosion-resistant material, finish optional.
8. Weight: 0.005 pound maximum.
9. Marking: Type designation to be stamped on the wire or insulating sleeve.

QUALIFICATION INSPECTION:

Group submission:

TABLE I

| Type designation | Tests MIL-L-3661 | Extent of approval |
|---|---|---|
| LHC82/1YT2<br>LHC82/2YT2 | (12 sample units)<br>All tests of table V | All |
| LHC82/1WT2<br>LHC82/1RT2<br>LHC82/1GT2<br>LHC82/1BT2<br>(A) LHC82/1GN2<br>LHC82/2WT2<br>LHC82/2RT2<br>LHC82/2GT2<br>LHC82/2BT2<br>(A) LHC82/2GN2 | (2 sample units each)<br>Group I of table V<br>(Visual and mechanical examination only) | |

Source: https://assist.dla.mil -- Downloaded: 20260-16T21:02Z
Check the source to verify that this is the current version before use.

TABLE II

| Type designation | Lens material | Electromagnetic interference | Transmittance | Lens color |
|---|---|---|---|---|
| LHC82/1WT2 | Plastic | 1/ | Translucent | White |
| LHC82/1RT2 | Plastic | 1/ | Translucent | Red |
| LHC82/1GT2 | Plastic | 1/ | Translucent | Green |
| LHC82/1BT2 | Plastic | 1/ | Translucent | Blue |
| LHC82/1YT2 | Plastic | 1/ | Translucent | Yellow |
| (A) LHC82/1CN2 | Plastic | 1/ | Nondiffusing | Colorless |
| LHC82/2WT2 | Plastic | 2/ | Translucent | White |
| LHC82/2RT2 | Plastic | 2/ | Translucent | Red |
| LHC82/2GT2 | Plastic | 2/ | Translucent | Green |
| LHC82/2BT2 | Plastic | 2/ | Translucent | Blue |
| LHC82/2YT2 | Plastic | 2/ | Translucent | Yellow |
| (A) LHC82/2CN2 | Plastic | 2/ | Nondiffusing | Colorless |

1/Not electromagnetic interference shielded.
2/Electromagnetic interference shielded. Case must be grounded.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL,
Navy -
Air Force -82 , 85

User activities:
Army -
Navy - MC, SH, AS

Preparing activity:
Navy - EC
(Project 6210 -0306)



Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.