INCH-POUND


MIL-DTL-3661/40B
09 October 2008
SUPERSEDING
MIL-L-3661/40A
14 July 1969

MILITARY SPECIFICATION SHEET

LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES INDICATOR-LIGHT (NON-REMOVABLE), STYLE LHC82 (ELECTROMAGNETIC INTERFERENCE AND NON-ELECTROMAGNETIC TYPES)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-3661.

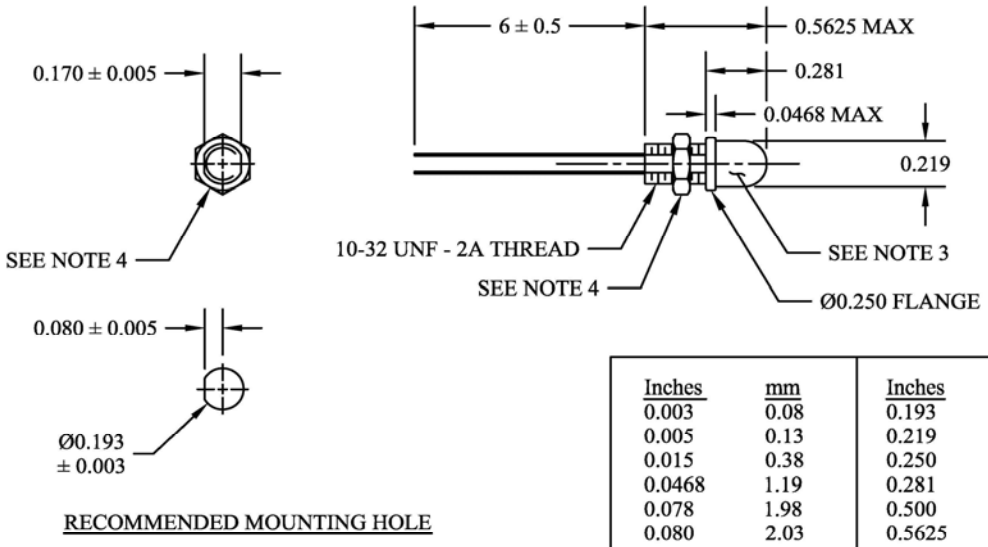

Inches	mm	Inches	mm
0.003	0.08	0.193	4.90
0.005	0.13	0.219	5.56
0.015	0.38	0.250	6.35
0.0468	1.19	0.281	7.14
0.078	1.98	0.500	12.70
0.080	2.03	0.5625	14.29
0.170	4.32	6.000	152.40

NOTES:
1. All dimensions are in inches. Unless otherwise specified tolerances are ± 0.015.
2. Metric equivalents (to the nearest 0.01 mm) are given for general information only and are based on 1 inch = 25.4 mm.
3. Lense shall be as specified in table II.
4. Hex nut shall be 0.25 inch across the flats, 0.078 thick and have 10-32 UNF - 2B threads.

FIGURE 1. Design and Construction

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction. See figure one.

2. Dielectric withstanding voltage: Sea level 500 Volts r.m.s. at 60Hz.

3. Bushing torque: 8 pound-inches.

4. Lamp (non-replaceable): MIL-DTL-6363/5 “Part number M6363/5-1AS15”

5. Shock: Method II

6. Wire leads shall be in accordance with SAE-AS22759/11.

7. Threaded stud case shall be fabricated from a corrosion-resistant steel. The finish is optional.

8. Weight: 0.005 pound maximum.

9. Marking: Type designation to be stamped on the wire or insulating sleeve.

10. If Electromagnetic Interference (EMI) shielded; case must be grounded.

TABLE I. Conformance Inspection.

Type Designation	Tests MIL-DTL-3661	Extent of Approval
LHC82 / 1YT2 LHC82 / 2YT2	(12 Sample units) All test of Table IV	ALL
LHC82 / 1WT2 LHC82 / 1RT2 LHC82 / 1GT2 LHC82 / 1BT2 LHC82 / 1CN2 LHC82 / 2WT2 LHC82 / 2RT2 LHC82 / 2GT2 LHC82 / 2BT2 LHC82 / 2CN2	(2 Sample units each) Group I of Table IV (visual and mechanical examination only)	

TABLE II. Type Designation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

Type Designation	Lens Material	Electromagnetic Interference(EMI)	Transmittance	Lens Color
LHC82 / 1WT2	Plastic	Not EMI*	Translucent	White
LHC82 / 1RT2	Plastic	Not EMI*	Translucent	Red
LHC82 / 1GT2	Plastic	Not EMI*	Translucent	Green
LHC82 / 1BT2	Plastic	Not EMI*	Translucent	Blue
LHC82 / 1YT2	Plastic	Not EMI*	Translucent	Yellow
LHC82 / 1CN2	Plastic	Not EMI*	Nondiffusing	Colorless
LHC82 / 2WT2	Plastic	EMI**	Translucent	White
LHC82 / 2RT2	Plastic	EMI**	Translucent	Red
LHC82 / 2GT2	Plastic	EMI**	Translucent	Green
LHC82 / 2BT2	Plastic	EMI**	Translucent	Blue
LHC82 / 2YT2	Plastic	EMI**	Translucent	Yellow
LHC82 / 2CN2	Plastic	EMI**	Nondiffusing	Colorless

* Not Electromagnetic Interference shielded.
** Electromagnetic Interference shielded. Case **must be grounded**.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - CR
Navy - AS
Air Force - 99

Review Activities:
Army – CR4, MI
Navy - MC
Air Force - 71

Preparing Activity:
DLA – GS-2

(Project 6210-2008-008)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at http://assist.daps.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.