MIL-L-3661/41B
14 July 1969
SUPERSEDING
MIL-L-3661/41A
3 September 1968


MILITARY SPECIFICATION SHEET


LAMPHOLDERS, INDICATOR LIGHTS, INDICATOR-LIGHT HOUSINGS AND INDICATOR-LIGHT LENSES INDICATOR-LIGHT (NON-REMOVABLE), STYLE LHC83 (ELECTROMAGNETIC INTERFERENCE AND NON-ELECTROMAGNETIC TYPES)

Ⓑ

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the indicator lights described herein shall consist of this document and the latest issue of MIL-L-3661.

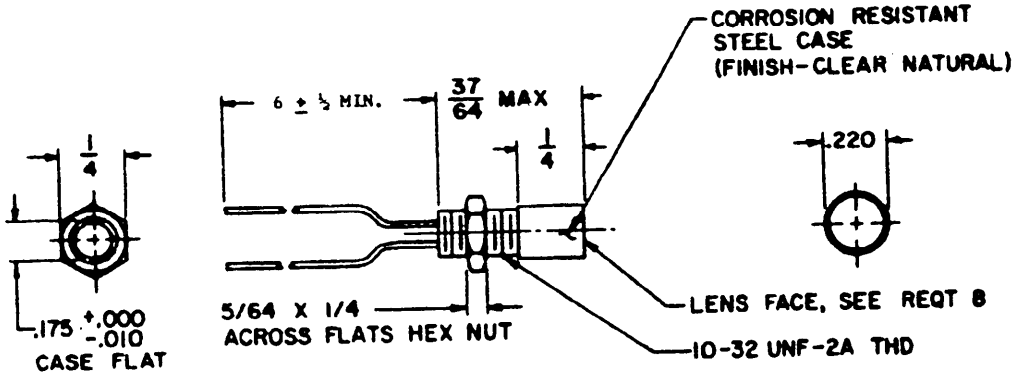



RECOMMENDED MOUNTING HOLE

EC 148

inches	mm
.003	.08
.010	.25
5/64	1.98
.175	4.45
.179	4.55
.193	4.90
.220	5.59
1/4	6.35
37/64	14.68
6	152.40

NOTES:
1. ALL DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/64 INCH FOR FRACTIONS AND ±.005 INCH FOR DECIMALS.
2. METRIC EQUIVALENTS (TO THE NEAREST .01 MM) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 MM.

Ⓑ denotes changes

FSC 6210

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Design and construction: See figure.
2. Dielectric withstanding voltage:
   Sea level: 500 volts r.m.s. at 60 Hz.
3. Bushing torque: 8 pound-inches.
4. (B) Lamp (non-replaceable): MS24367 - 683 (5 volts).
5. Shock: Method II.
6. Wire leads shall be in accordance with MS21985-26.
7. Threaded stud case shall be fabricated from a corrosion-resistant material, finish optional.
8. (B) Effective lens face: 0.200 dia. ± .010
   - .025
9. Weight: 0.005 pound maximum.
10. Marking: Type designation to be stamped on the wire or insulating sleeve.

QUALIFICATION INSPECTION:

Group submission:

TABLE I

Type designation	Tests MIL-L-3661	Extent of approval
LHC83/1WT2	(12 sample units) All tests of table V	All
LHC83/1RT2 LHC83/1GT2 LHC83/1BT2 LCH83/1YT2 LHC83/2WT2 LHC83/2RT2 LHC83/2GT2 LHC83/2BT2 LHC83/2YT2	(2 sample units each) Group I of table V (Visual and mechanical examination only)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.

TABLE II

Type designation	Lens material	Electromagnetic interference	Transmittance	Lens color
LHC83/1WT2	Plastic	1/	Translucent	White
LHC83/1RT2	Plastic	1/	Translucent	Red
LHC83/1GT2	Plastic	1/	Translucent	Green
LHC83/1BT2	Plastic	1/	Translucent	Blue
LHC83/1YT2	Plastic	1/	Translucent	Yellow
LHC83/2WT2	Plastic	2/	Translucent	White
LHC83/2RT2	Plastic	2/	Translucent	Red
LHC83/2GT2	Plastic	2/	Translucent	Green
LHC83/2BT2	Plastic	2/	Translucent	Blue
LHC83/2YT2	Plastic	2/	Translucent	Yellow

1/Not electromagnetic interference shielded.
2/Electromagnetic interference shielded. Case must be grounded.

Custodians:
Army - EL
Navy - EC
Air Force - 82

Review activities:
Army - EL
Navy -
Air Force - 82, 85

User activities:
Army -
Navy - MC, AS, SH

Preparing activity:
Navy - EC
(Project 6210-0307)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T21:02Z
Check the source to verify that this is the current version before use.