[METRIC]
A-A-3070
January 13, 1997
SUPERSEDES
GGG-S-001333A
October 16, 1975

# COMMERCIAL ITEM DESCRIPTION

## SCRAPERS, ICE AND SNOW, VEHICLE WINDOW

The General Services Administration has authorized the use of this commercial item description by all Federal agencies.

1. SCOPE. This description covers three types of scrapers for use on vehicle windows: a scraper-squeegee with a long wooden handle, a heavy duty hand-held ice scraper, and a light duty scraper with a brush.

2. CLASSIFICATION. The scrapers shall be of the following types:

Type I - Scraper-squeegee.
Type II - Ice scraper.
Type III - Scraper-brush

3. SALIENT CHARACTERISTICS

3.1 Type I. The type I scraper-squeegee shall consist of a frame head containing a plastic scraper with teeth and a rubber squeegee. The frame shall be firmly and permanently attached to a wooden handle. The entire assembly shall be configured as shown by figure 1.

3.1.1 Handle. The handle shall be wood, uniformly cylindrical in shape not less than 1.9 cm in diameter and not less than 58 cm in length, with the handle end rounded. The handle shall be free of warp greater than 0.31 cm when rolled on a flat surface. The wood for handles shall be thoroughly seasoned, close-grained and straight-grained wood. There shall be no evidence of decay, knots, splits, checks, or slivers.

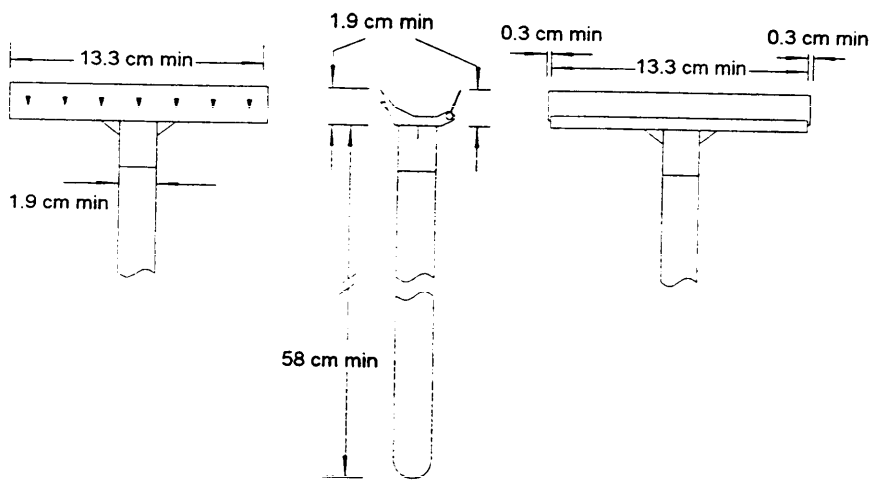



Figure 1
(Type I)

Beneficial comments, recommendations, additions, deletions, clarifications, etc. and any data which may improve this document should be sent to: General Services Administration, Engineering Group (7FXEE), 819 Taylor Street, Fort Worth, TX 76102

FSC 7920

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

3.1.2 Rubber squeegee blade. The squeegee blade shall be natural or synthetic rubber. The blade shall extend beyond the aluminum or plastic frame a minimum of 0.3 cm on each end. The blade shall have a molded bead along one edge which fits tightly into the channel provided for it on the frame. The blade shall contain no coloring agent which will bleed or run when the blade is immersed in 75°C water for 15 minutes. The blade shall be able to with stand an accelerated aging test, either ASTM D 572 (at 20°C for 94 hours) or ASTM D 573. The aged blades shall show no signs of cracking or breaking and shall return to within 1.2 cm of the original position when bent 90° in both directions, 25 times, over a rod 1.3 cm in diameter. There shall be no evidence of surface water or streaks remaining after wiping a wet pane of glass clean with it.

3.1.3 Scraper. The scraper edge shall be plastic; shall have a beveled edge; and shall be suitable for scraping snow, frost, and thin ice from a vehicle window. The scraper shall have the dimensions shown on figure 1. The scraper shall have a minimum of 6 teeth that are 0.23 cm minimum in height.

3.1.4 Frame. The frame shall be plastic, aluminum, or a combination not less than 13.3 cm wide. All frames shall have a channel which securely holds the rubber blade specified by 3.1.2.

3.2 Type II.

3.2.1 Design. The ice scraper shall be an all plastic, two piece (handle and blade), one-hand use heavy duty ice scraper with a single scraper blade. The scraper shall be configured similar to figure 2, and shall have the dimensions shown by figure 2. The attachment method of the two pieces shall not allow separation under use. The entire scraper assembly shall be curved or bent so that when the scraper is placed on a flat surface, both the sharp portion of the blade edge and the handle end shall rest on the surface and show a 1.5 cm minimum clearance between the scraper body and the surface (see figure 2). The entire assembly shall not anywhere be less than 0.5 cm thick.

3.2.2 Blade. The blade portion shall be manufactured from polystyrene, acrylic plastic, or nylon. The blade shall be flat and show no gap when placed on a flat surface. The blade shall have incorporated into its design a minimum of 4 teeth on its back for use in breaking up thick ice, these teeth shall be pointing in a upward direction when the blade is placed on a flat surface as shown by figure 2.

3.2.3 Handle. The handle portion shall be composed of, or covered with, a softer plastic or rubber material for a minimum of 11 cm of its length to provide a comfortable gripping surface. The handle shall have a hanging hole or slot in the handle end.

3.3 Type III.

3.3.1 Design. The scraper-brush shall be configured similar to figure 3 and shall conform to the dimensions shown by figure 3. The brush shall be composed entirely of synthetic components. The brush filler material shall not be brittle, shall be firmly set into the handle, and shall be effective in sweeping snow and lightweight debris. The scraper blade shall be effective as a light duty ice scraper and shall have between 7 and 9 teeth extending a minimum of 4.8 mm from the blade.

3.4 Workmanship. The items shall be of good quality workmanship and shall be free of all defects which affect appearance, durability, or serviceability. There shall be no splinters, knots, rough edges, sharp edges (except for the scraper edges), or flashing.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

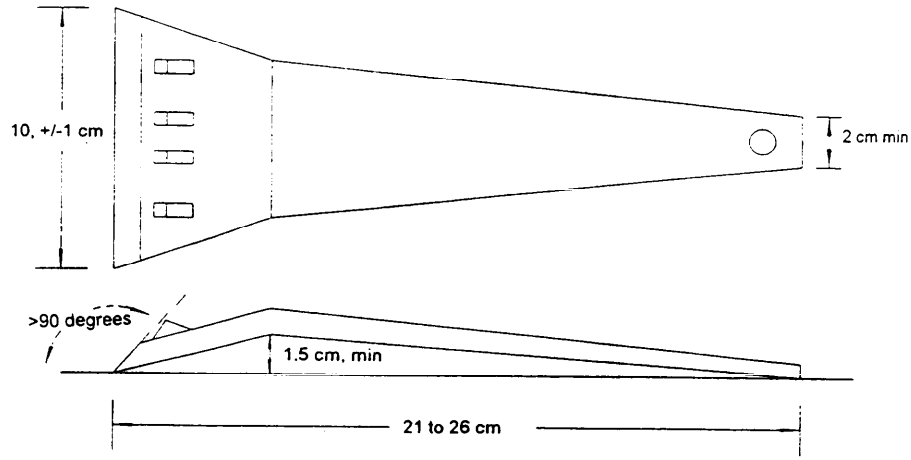



Figure 2
(Type II)

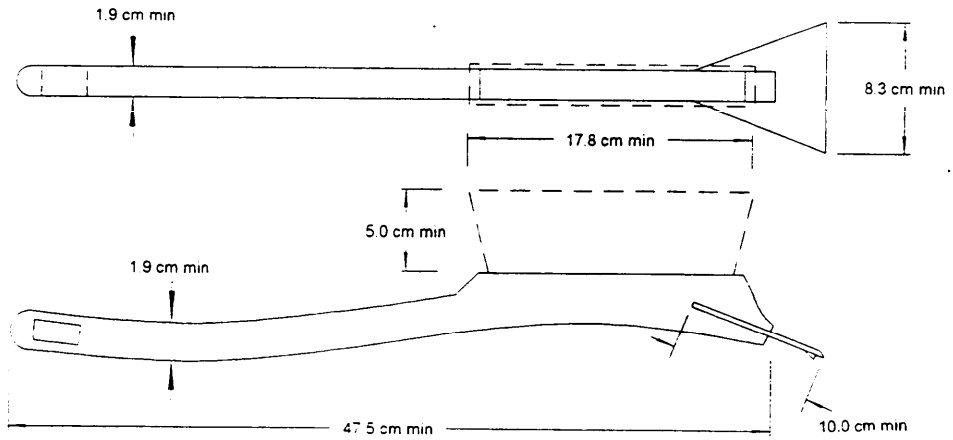



Figure 3
(Type III)

3.5 Inch/pound products. Products manufactured to inch/pound dimensions will be considered on an equal basis with those manufactured using metric units, provided they fall within the tolerances specified and all other requirements of this description are met.

3.6 Figures. Figures 1, 2 and 3 are intended to show configuration and relationships and are not intended to specify a specific item or brand.

4. REGULATORY REQUIREMENTS.

4.1 Regulatory requirements. The offeror/contractor is encouraged to use recovered materials to the maximum extent practicable, in accordance with paragraph 23.403 of the Federal Acquisition Regulation (FAR).

5. QUALITY ASSURANCE PROVISIONS

5.1 Product conformance. The products provided shall meet the salient characteristics of this CID, shall conform to the producer's own drawings, specifications, standards, and quality assurance practices, and shall be the same product offered for sale in the commercial market. The government reserves the right to require proof of such conformance.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.

6. PREPARATION FOR DELIVERY

6.1 Packaging, packing, and marking. The packaging, packing, and marking shall be as specified in the contract or purchase order.

7. NOTES

7.1 Intended use. The type I scraper-squeegee is intended to be used to remove snow, thin ice, and water from a vehicle window. The type II ice scraper is intended to remove heavy accumulations of ice and snow from a vehicle window. The type III scraper-brush is intended to remove snow and thin ice from a vehicle window.

7.2 Ordering data. The purchaser should include the following on procurement documents:

(a) Title, number, and date of this specification.
(b) Type desired.
(c) Packaging, packing, and marking required.

7.3 Part Identification Number (PIN). This part numbering system is intended for identification and cross-indexing of the item by the government only and does not constitute a requirement for the contractor.

Example: AA3070 / A
|_____ Type I = A
Type II = B
Type III = C

7.4 National Stock Number (NSN). The following NSN's are known to reference this document.

| NSN | Type | PN |
|---|---|---|
| 7920-00-045-2556 | I | AA3070/A |
| 7920-01-323-0793 | II | AA3070/B |
| 7920-01-383-8023 | III | AA3070/C |

Preparing Activity
GSA-FSS



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:29Z
Check the source to verify that this is the current version before use.