NOT MEASUREMENT SENSITIVE

MIL-B-3476H
10 May 1991
SUPERSEDING
MIL-B-3476G
30 March 1973

MILITARY SPECIFICATION

BRASSARD, GENERAL SPECIFICATION FOR

This specification is approved for use by all Departments and agencies of the Department of Defense

1. SCOPE

1.1 Scope. This specification covers the general requirements for brassards used by the Department of Defense.

1.2 Classification. Brassards covered herein shall be as specified herein and the applicable military specification sheet (see 2.1, 3.1, 6.2 and supplement 1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. The following specifications, standards and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

C-F-206 - Felt Sheet, Cloth, Felt, Wool, Pressed
V-T-276 - Thread, Cotton
FF-P-416 - Pins, Safety
JJ-W-155 - Webbing, Textile (Cotton Elastic)
NN-P-71 - Pallet, Material Handling, Wood Stringer Construction, 2 way and 4 way (Partial)
TT-I-542 - Ink, Marking, Laundry, Black
CCC-C-447 - Cloth, Percale, Cotton
CCC-C-461 - Cloth, Twill, Uniform, Cotton
PPP-B-601 - Boxes, Wood, Cleated-Plywood
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-C-823 - Cloth, Serge, Wool, Wool and Nylon, Polyester and wool
MIL-C-7219 - Cloth, Duck, Nylon
MIL-F-10884 - Fasteners, Snap
MIL-I-14652 - Insignia, Embroidered, Organizational, Insignia and Badges, General Specification For
MIL-P-15011 - Pallet, Material Handling, Wood Post Construction, 4 Way Entry
MIL-C-16290 - Cloth, Melton, Wool (Moth Proofed)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in preparing this document should be address to: Director, The Institute of Heraldry, U.S. Army, Cameron Station, Alexandria, VA 22304-5050, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document.

AMSC N/A FSC 8455
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

MIL-F-21840 - Fastener Tapes, Hook and Loop, Synthetic
MIL-T-43566 - Tape, Textile, Cotton or Polyester General Purpose, Natural or in Colors
MIL-C-82252 - Cloth, Broadcloth, Wool and Wool-Synthetic (Moth-Proofed)

(See supplement 1 for list of associated specification sheets)

STANDARDS

FEDERAL

FED-STD-191 - Textile, Test Methods
FED-STD-751 - Stitches, Seams and Stitching

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from: Standardization Document Order Desk, Building 4D, Section D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

THE INSTITUTE OF HERALDRY

B-8-42 - Brassard, Location of Dot Fasteners
B-8-42A - Brassard, Location of Dot Fasteners
B-8-61 - Brassard, Location of Hook and Loop Fasteners

(Copies of specifications, standards, drawings and specification sheets required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

(Figures 1, 2 and 3 are miniature reproductions of the referenced drawings and are for information only.)

2.2 Non-Government publications. The following documents form a part of this document to the extend specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

AMERICAN SOCIETY FOR TESTING AND MATERIALS

ASTM-D-3951 - Standard Practice for Commercial Packaging

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.

THE COLOR ASSOCIATION OF THE UNITED STATES

The Standard Color Reference of America, Tenth Edition.

United States Army Color Card, The Official Colors for Branches, Agencies, etc.

DOD Standard Shades for Heraldic Yarns for Embroidery and Ribbons, 1974.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

(Application for copies of the color cards should be addressed to the Color Association of the United States., 343 Lexington Avenue, New York, NY 10016.)

(Nongovernment standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other information services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for related associated detail specifications, specification sheets, or MS standards), the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Specification sheets. The individual item requirements shall be as specified herein and in accordance with the applicable MS sheet. In the event of any conflict between the requirements of this specification and the MS sheet, the latter shall govern.

3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection.

3.3 Standard sample. Unless otherwise specified (see 6.2), the contracting officer shall furnish a standard sample or approved guide sample which shall be used for matching color and colorfastness. In the event there is a variation from this specification and the standard or guide sample, the specification shall govern.

3.4 Material. The material shall be as specified herein. Recovered material shall be used to the maximum extent possible.

3.4.1 Percale. The percale shall conform to CCC-C-447 except the colorfastness shall conform to the requirements of 3.7.2.

3.4.2 Wool broadcloth or facing cloth. The wool broadcloth or facing cloth shall conform to type I, class 3 or type II, class 3 of MIL-C-82252, except the color shall conform to the cable number specified on the applicable specification sheet and the colorfastness shall conform to the requirements of 3.7.2.

3.4.3 Wool felt. The pressed wool felt shall conform to type III, classification 6A1 of C-F-206, except the colorfastness shall conform to the requirements of 3.7.2.

3.4.4 Cloth, cotton, uniform twill. The cotton uniform twill cloth shall conform to any type of CCC-C-461.

3.4.5 Cloth, wool serge. The wool serge base cloth shall conform to type I, class 1 of MIL-C-823, except the colorfastness shall conform to the requirements of 3.7.2.

3.4.6 Cloth, wool melton. The wool melton cloth shall conform to type I or type II of MIL-C-16290, except the color shall conform to the shade or cable number specified on the applicable specification sheet.

3.4.7 Cloth, duck, nylon. The nylon duck base cloth shall conform to Type III, Class 3, MIL-C-7219.

3.4.8 Buckram. The buckram shall be a light, open-weave, single ply fabric weighing 2.5 ounces (minimum) per square yard having a minimum thread count of 40 ends in the warp and 20 ends in the filling. The buckram shall have a minimum breaking strength of 30 pounds in the warp direction and 20 pounds in the filling direction. Testing shall be in accordance with 4.5.1.1.

3.4.9 Tape. The tape shall conform to type I, class 3, 1/2 inch (1.27 cm) in width of MIL-T-43566, except the fastness to accelerated weathering and bleaching shall not apply and the tape shall be black in color.

3.4.10 Elastic webbing. The elastic webbing shall conform to type I, class 8 of JJ-W-155. The webbing shall be 1-1/4 inches (3.18 cm) in width and shall be dark blue in color.

Source: https://assist.dla.mil -- Downloaded: 202640-16T17:48Z
Check the source to verify that this is the current version before use.

3.4.11 Ink. The ink for marking and stenciling shall show good fastness to laundering and dry cleaning as specified in TT-I-542.

3.4.12 Snap fasteners. Snap fasteners shall conform to style 3, size 17 ligne, finish 2 or 3 of MIL-F-10884. Finish 2 shall be used on dark background brassards. Finish 3 shall be used on white background only.

3.4.13 Safety pins. Safety pins shall conform to size No. 1 without guard of FF-P-416.

3.4.14 Thread. The cotton thread shall conform to V-T-276. The size and color shall be as specified on the applicable specification sheet.

3.4.15 Embroidery yarn. The embroidery yarn shall be a semidull continuous filament, regenerated cellulose type rayon, two-ply schiffli type yarn. The yarn shall be 150, 100 or 75 denier as specified on the applicable cartoon or drawing. Unless otherwise specified, the use of polyester is authorized in lieu of rayon. When polyester yarn is used, 135 denier will be substituted for 150 denier, 90 denier will be substituted for 100 denier, and 70 denier will be substituted for 75 denier rayon.

3.4.15.1 Color. The color of the embroidery yarn shall be as specified on the applicable drawing or cartoon. When overedge stitching is required, the color shall be the same as the embroidered border. The use of sulphur dyes is prohibited (see 3.4.17.1).

3.4.15.2 Matching. The color shall match the standard sample when viewed under filtered tungsten lamps which approximate artificial daylight having a correlated color temperature of 7000 plus or minus 500 K, with illumination of 100 plus or minus 20 foot candles, and shall be a good match to the sample under incandescent lamplight at 2300 plus or minus 100 K. The degree of luster shall be equal to the standards established in the DOD Standard Color Card of Official Standardized Shades for Heraldic Yarns for Embroidery and Ribbons, 1974.

3.4.16 Bobbin yarn. Unless otherwise specified on the applicable specification sheet, the bobbin yarn used in the Schiffli embroidery shall be a continuous multi-filament nylon or two-ply cotton yarn.

3.4.17 Overedge stitching yarn and thread. The yarn and thread used for overedge stitching shall be 600 or 1200 denier multi-filament bright rayon for cover thread (see 3.6.1) and type I, ticket No. 00, 3 ply of V-T-276 for needle and looper threads.

3.4.17.1 Color. The color of the yarn and thread used for overedge stitching shall be as specified for the embroidered edge on the applicable drawing or cartoon. The use of sulphur dyes is prohibited (see 3.4.15.1).

3.4.18 Fastener tape. The fastener tape shall be a nylon hook and pile tape conforming to type I or II of MIL-F-21840. The tape shall be the color specified in the applicable specification sheet and shall be stitched to the base in the location shown on drawing B-8-61, (Figure 3) using the thread specified on the specification sheet for appliqueing and stitch type 301 with 10 to 12 stitches per inch.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:48Z
Check the source to verify that this is the current version before use.

3.5 Design. Design details shall be as specified in the applicable specification sheet. Unless an exception is specified on the applicable specification sheet, the attaching devices shall be as shown on figure 1 for 20 inch brassards as shown on figure 2 for 18 inch brassards. Except where elastic webbing is specified, all Navy, Marine Corps and Coast Guard brassards shall be supplied with two safety pins specified in 3.4.12. The safety pins shall be provided at the top and bottom of each brassard. When embroidery is required on the brassard, the embroidery shall be in accordance with an enlargement or cartoon which, unless otherwise specified (see 6.2), will be furnished by the Government. The finished embroidery shall contain not less than the minimum number of stitches specified.

3.6 Construction. Brassards shall be constructed in accordance with the applicable specification sheets and the requirements specified herein.

3.6.1 Embroidery. Unless otherwise specified on the applicable specification sheet, embroidery shall conform to the requirements for embroidery of shoulder sleeve insignia in MIL-I-14652.

3.6.2 Stitches, seams and stitches. Stitches, seams and stitching shall be in accordance with FED-STD-751. All ends of stitching not caught in seams or other stitching shall be backstitched not less than 1 inch (2.54 cm). Thread breaks shall be backstitched not less than 1/2 inch (1.27 cm) at each break. Thread tension shall be maintained so there will be no loose stitching and so there shall be equal tension on the top and bottom thread. All thread ends shall be trimmed. The number of stitches per inch, the stitch type and when applicable, the stitching type shall be as specified on the applicable specification sheet. When letters are appliqued, the stitching shall be located 1/8 inch plus or minus 1/16 inch (0.32 cm plus or minus 0.16 cm) from the edge of the letters. The hems shall have a 1/8 inch (0.32 cm) stitching margin.

3.6.3 Tolerances. Except when otherwise specified on the applicable specification sheet, the following tolerances shall apply for all brassards:

Length	Plus or minus 1/2 inch (1.27 cm)
Width	Plus 1/4 inch (0.64 cm), minus 0
Hem	Plus or minus 1/16 inch (0.16 cm)
Positioning of snap fasteners 1/	Plus or minus 1/16 inch (0.16 cm)
Position of fastener tape	Plus or minus 1/4 inch (0.64 cm)
Insignia centered:	
Between top and bottom up to	1/8 inch (0.32 cm)
Between ends up to	1/2 inch (1.27 cm)
Letters centered:	
Between top and bottom to 2/	1/8 inch (0.32 cm)
Between ends up to	1/2 inch (1.27 cm)
Appliqued overall size	Plus or minus 1/8 inch (0.32 cm)
Appliqued width	Plus or minus 1/16 inch (0.16 cm)
Stitches per inch	Plus or minus 2 stitches

1/ Providing there is no excessive bulging when snap fasteners are engaged.
2/ Providing all letters in horizontal rows are visually even.

3.7 Color. The colors of the brassard and threads shall be specified on the applicable specification sheets and shall match the shade indicated by the reference specification or as shown in the 10th edition, Standard Color Card of America, the U.S. Army Standard Color Card, The Official Colors for Branches, Agencies, etc., and the DOD Standard Color Shades for Heraldic Yarns for Embroidery and Ribbons, 1974 (see 2.2). When shade standards are specified, the shade samples shall be available from the contracting officer.

3.7.1 Matching. The color shall match the approved standard shade under natural (north sky) daylight or artificial daylight having a color temperature of 7500 degrees Kelvin and shall be a good approximation to the standard shade under incandescent lamplight at 2800 degrees Kelvin.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

3.7.2 Colorfastness. The dyed fabric and embroidery yarn shall show fastness to wet-dry cleaning, crocking and light properties equal to or better than the standard sample. When no standard samples are established, the dyed or printed fabric and embroidery yarn shall show good fastness to wet-dry cleaning, crocking and good fastness to light for 40 hours, except the black dyed percale shall show fair fastness to crocking.

3.8 Workmanship. The finished brassards shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in 4.5.

4.4 First article inspection. Inspection and testing of the first article shall be made on a completely fabricated brassard for all provisions of this specification applicable to the end product examination and tests (see 6.4).

4.5 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated.

4.5.1 Inspection of components.

4.5.1.1 Testing of components. In addition to the quality assurance provisions of the subsidiary specifications and drawings, testing shall be performed on components and materials listed in table I for test characteristics shown. The inspection level shall be S-1 and the acceptable quality level (AQL) shall be 6.5 defects per hundred units. Testing shall be in accordance with FED-STD-191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

TABLE I Component Testing

Component	Characteristic	Reqm't Para	Test method	Lot size expressed	Sample unit for testing
Rayon yarn	Material identification	3.4.15 or applicable specification sheet	1500, 1510 or 1520	1 cone, spool or tube	1 cone, spool or tube
	Denier		4021		
	Twist per inch: single yarn ply yarn		4052 4054		
	Colorfastness to: wet-dry cleaning crocking light	3.7.2	4622 4650 4660		
Fabric (other than buckram)	Colorfastness to: wet-dry cleaning crocking light 1/		5622 5651 5660	1 yard	3 yards full width
	Laundering for percale only		5610		
Buckram	Breaking strength Yard per inch Weave	3.4.8	5100 5050 Visual		1 yard full width

1/ In the event of a dispute resulting from the test with Method 5660, or as a result of suspected anomalous behavior of certain dye types or formulations, the contracting officer may authorize the exposure to natural light in accordance with Method 5662.

4.5.1.2 Certification of compliance. Components and materials listed below may be accepted on the basis of a contractor's certification of compliance for requirements specified in the applicable paragraph of this specification.

Component	Characteristic	Rqm't para
Bobbin thread for embroidering	Two ply undyed cotton thread or continuous filament nylon	3.4.16

4.5.2 Inspection of the end item.

4.5.2.1 Visual inspection of insignia. Examination shall be made at a distance of approximately 16 to 22 inches. The defects found during the examination shall be classified in accordance with 4.5.2.1.1 and 4.5.2.1.2. The lots shall be inspected in accordance with 4.5.2.1.3. The sample unit for these examinations shall be one completely fabricated brassard.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

4.5.2.1.1 Examination of brassards for visual characteristics. Defects designated by an asterisk (*) shall be classified as major when seriously affecting serviceability or appearance and minor when affecting serviceability or appearance but not seriously.

Examine	Defect	Classification	
		Major	(*) Minor
Quality of cloth (Background, letters and tape)	Any component not fabricated of specified material	x	
Color	Color other than specified	x	
	Off shade		x
Material	Hole, cut, tear, smash or weak place	x	
	Spots, stains, streaks or shade bars		*
	Two or more continuous broken or missing ends or picks		*
	Double pick, coarse pick or mispick clearly noticeable		x
	Slub, slough-off, float or skip		*
	Wrong number of plies	x	
	Objectionable odor		*
	Not clean		*
Stencilling, Printing or inking (when applicable)	Design or any part of design omitted	x	
	Accomplished with wrong material	x	
	Poor registration, over printed or feathering		*
	Wrong color	x	
	Marking material used in stencilling or printing adversely affects hand of fabric		*
	Shade variation or uneven penetration of marking material affecting appearance		*
	Marking material mottled affecting appearance at 6 feet		x
Embroidery (when applicable)	Broken stitches or skipped stitches		*
	Not applied as specified	x	
	Design reversed or inverted	x	
	Design misplaced or in wrong location		*
	Any detail not conforming to applicable cartoon or specification sheet	x	
	Stitching missing		*
	Wrong color or wrong color arrangement	x	
	Wrong shade		x
	Stitches out of alignment or not in accord with applicable cartoon or enlargement		*
	Closeness and density of stitches not equal to standard sample		*
	Float, bunched or tangled yarn		*
	Loose tension, resulting in slack, open or loopy appearance		*
	Tension too tight affecting appearance		*
Applique (Letters, bars, chevrons, cross)	Not applied as specified	x	
	Design reversed or inverted	x	
	Design misplaced or in wrong location		*
	Lettering does not read from left to right	x	
	Letter or insignia not neatly trimmed		*
	Misshaped, distorted, crooked or puckered		*
	Any letter or insignia part missing	x	

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	(*)	Minor
CONSTRUCTION AND WORKMANSHIP				
General	Operation omitted	x		
	Operation not accomplished as specified		*	
	Brassard pieced	x		
	Component is not fabricated as specified or is not of material specified	x		
Hem	Not hemmed all around	x		
	Wrong type of hem	x		
	Hem uneven		*	
Seams, stitches and stitching	Wrong type of seam, stitches or stitching		*	
	Wrong color thread			x
	Row of stitches partially or completely missing	x		
	Wrong stitching gage or margin			x
	Backstitching omitted	x		
	Ends of stitching not backstitched one inch (when not caught in other seams or stitching)		*	
	Thread ends not trimmed on face of brassard		*	
	Thread ends not trimmed on back of brassard			x
	Needle chews		*	
	Loose stitch tension resulting in a loosely secured hem or insignia	x		
	More than one skipped stitch		*	
	Stitches per inch exceed tolerance specified			x
	One stitch less than minimum specified			x
	Two or more stitches less than minimum specified	x		
	Overedge stitching not as specified	x		
Open seams	More than 1/4 inch, but not more than 1/2 inch			x
	More than 1/2 inch	x		
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or run-offs occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.			
Run-off	See classification of open seam.			
Application of buckram (when applicable)	Missing	x		
	Edge of buckram not even with edge of insignia		*	
	Does not reinforce entire design			x
Application of tape loop (When applicable)	Missing	x		
	Not attached as specified	x		
	Attachment of loop is not accomplished with box stitching or bartacking			x
	Misplaced		*	
	Loop twisted			x

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification	
		Major	(*) Minor
Safety pins (when applicable)	Any missing	x	
	Not specified size		x
	Malformed, misshapen, damaged or otherwise impaired	*	
	Not constructed as specified	x	
	Finish shows evidence of corrosion		x
Snap fastener (when applicable)	Male or female portion missing or broken	x	
	Male or female portion split	*	
	Malformed, misshapen, damaged or otherwise impaired	*	
	Out of alignment or not in location specified	*	
	Finish does not completely cover fastener	*	
	Not type finish specified	x	
	Burr or sharp edge which may cause injury	x	
	Not securely attached	x	
	Will not function as intended	x	
Fastener tap (when applicable)	Missing one or more strips	x	
	Not securely stitched to the base	x	
	Incorrect color	x	
	Wrong location	*	
	Malformed, damaged or otherwise impaired	*	

NOTE: Variation in the number of stitches per inch caused by the operator speeding up the machine or pulling fabric such as sewing over heavy places, or in turning corners shall be classified as follows:

Major to minors, minors to no defects.

4.5.2.1.2 Examination of brassards for dimensions. Any dimension which is not within the specified tolerances shall be classified as a defect.

4.5.2.1.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

	Inspection level	AQL Major	AQL Total
For examinations applicable to 4.5.2.1.1	II	1.5	6.5
For examinations applicable to 4.5.2.1.2	S-3	One class	10.0

4.5.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects for closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:48Z
Check the source to verify that this is the current version before use.

EXAMINE	DEFECT
Markings, exterior and interior	Missing, incorrect, illegible or improper size, location sequence or method of application.
Materials	Component missing, damaged or otherwise defective affecting serviceability.
	Intermediate boxes missing or not specified type.
	Box not sealed with gummed paper tape.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, inadequate strapping.
	Bulging or distortion of containers.
Content	Number of brassards per bundle is more or less than required. 1/
	Number of bundles per container is more or less than required.
Weight	Net weight exceeds the requirements.

1/ For this defect one bundle shall be examined from each shipping container in the sample.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Unit packaging. Ten brassards of one type only shall be neatly and evenly stacked in a bundle and securely tied at each end with cotton tape or twine.

5.1.1.2 Intermediate packaging. Twelve bundles shall be placed in a snug-fitting fiberboard box conforming to style RSC, type CF or SF, class domestic, grade 200 of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. Before closure, not less than three ounces of naphthalene flakes shall be uniformly distributed throughout the contents of each box containing brassards made of wool or part wool fabrics (see 6.6).

5.1.2 Commercial. Brassards shall be preserved and packaged in accordance with the applicable requirements of ASTM-D-3951.

5.2 PACKING. Packing shall be level A, B or commercial, as specified (see 6.2).

5.2.1 Level A. Four hundred and eighty brassards (4 intermediate boxes) packaged as specified in 5.1.1 shall be packed in shipping containers conforming to overseas type, style A, B, I or J of PPP-B-601 or class 2 of PPP-B-621. Closure shall be in accordance with the applicable container specification.

5.2.2 Level B. Four hundred and eighty brassards (4 intermediate boxes) packaged as specified in 5.1.1 shall be packed in a snug fitting shipping container conforming to type CF or SF, class domestic, grade 275 of PPP-B-636. Closure shall be in accordance with the container specification.

5.2.3 Commercial. Brassards of one type only, packaged as specified in 5.1 shall be packed in accordance with the applicable requirements of ASTM-D-3951.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

5.3 Palletization. Unitized loads, commensurate with the level of packing specified in the contract or order, shall be palletized on a 4-way entry pallet in accordance with load type 1A of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means C, K and L or O or P. Pallet pattern shall be in accordance with the appendix of MIL-STD-147. The pallet shall be 4-way, type I, Class 1, Style 1, Size A, Wood Group I, II, III or IV of MIL-P-15011, or, 4-way, Type IV, V or VIII, Class 1, Style A, Size 2, Wood Group I, II, III or IV, Grade A of NN-P-71. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the patterns specified in MIL-STD-147, the pallet pattern used shall be approved by the contracting officer.

5.4 Marking. In addition to any special markings required by the contract or purchase order, unit packages, intermediate boxes, shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Brassards covered by this specification are intended to be worn on the arm of certain DOD personnel to readily identify that the wearer has a particular job or a temporary duty assignment.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number and date of this specification and the applicable specification sheet.

b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (See 2.1.1 and 2.2).

c. When a first article is required (see 3.2).

d. When standard samples will not be furnished (see 3.3 and 6.3).

e. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

f. When a cartoon is required (see 3.5).

6.3 Samples. For access to guide samples, address the contracting activity issuing the invitation for bids.

6.4 First article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item should be a preproduction sample, a first production sample or a standard production item from the contractor's current inventory as specified in 4.4. The first article should consist of one completely fabricated brassard. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. The invitations for bids should provide that the Government reserves the right to waive the requirement for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or tests, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Armed services medical stock list. This specification includes the requirements for the following items appearing in the Armed Services Medical Stock List:

8455-265-4799 - Brassard, Green Cross
8455-772-5845 - Brassard, Red Cross

6.6 Naphthalene flakes requirement. The naphthalene flakes requirement is not applicable when Government furnished wool or part wool fabric has been moth proof treated.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

6.7 Subject term (key word) listing.

Arm band

Custodians:
Army - IH
Air Force - 11
Navy - NU

Review activities:
Navy - CG
Air Force - 82
DLA - CT

Preparing activity:
Army - IH

(Project No. 8455-0118)

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:48Z
Check the source to verify that this is the current version before use.

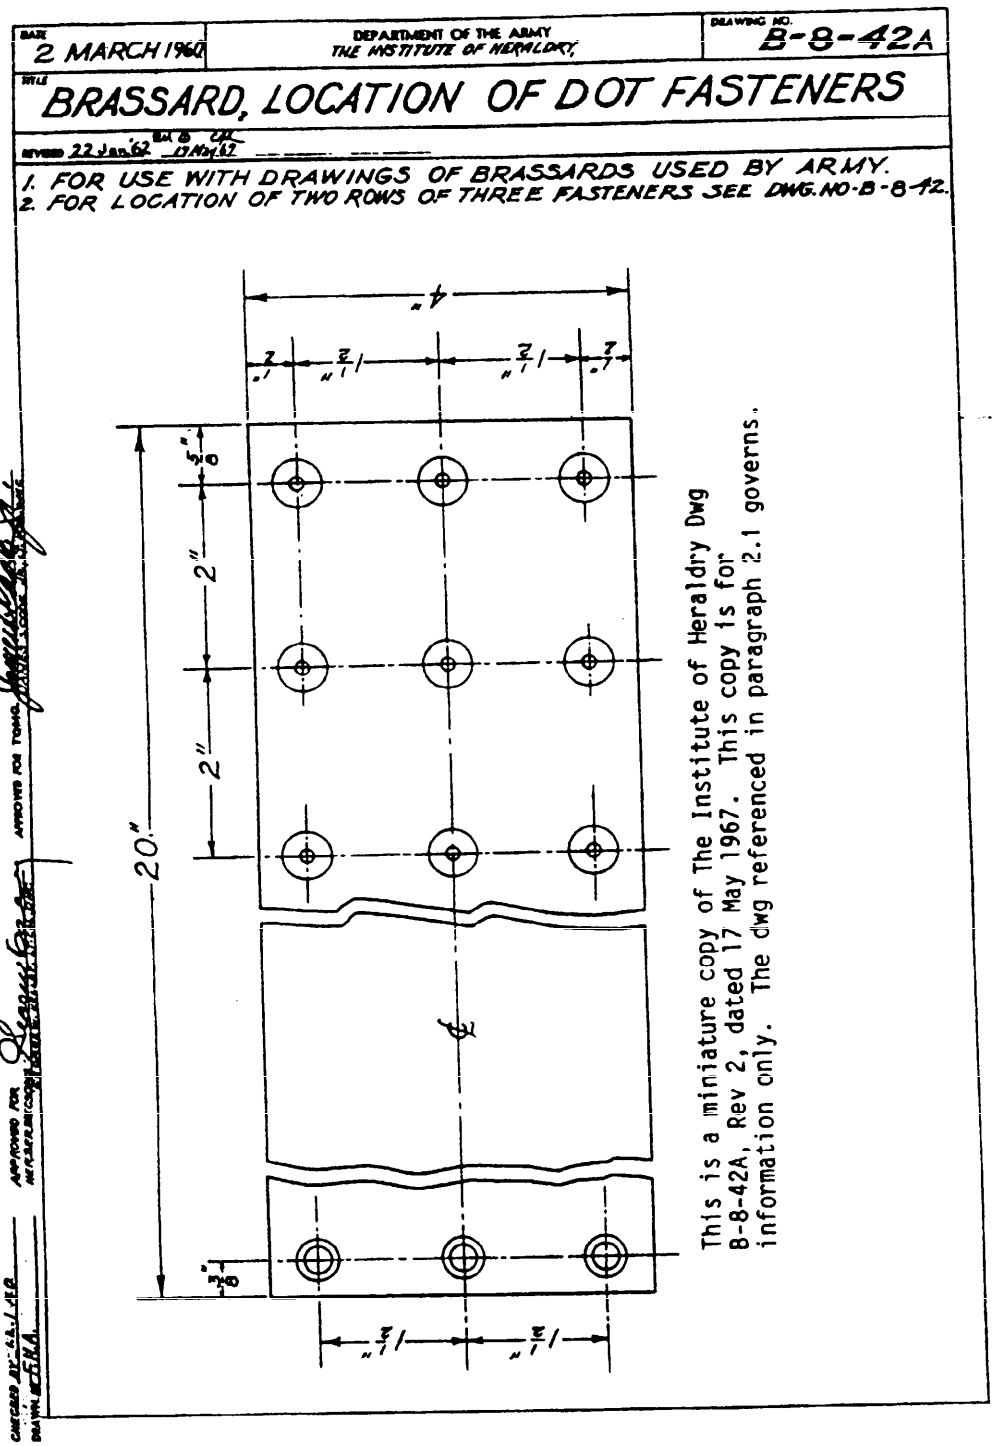


FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:48Z
Check the source to verify that this is the current version before use.

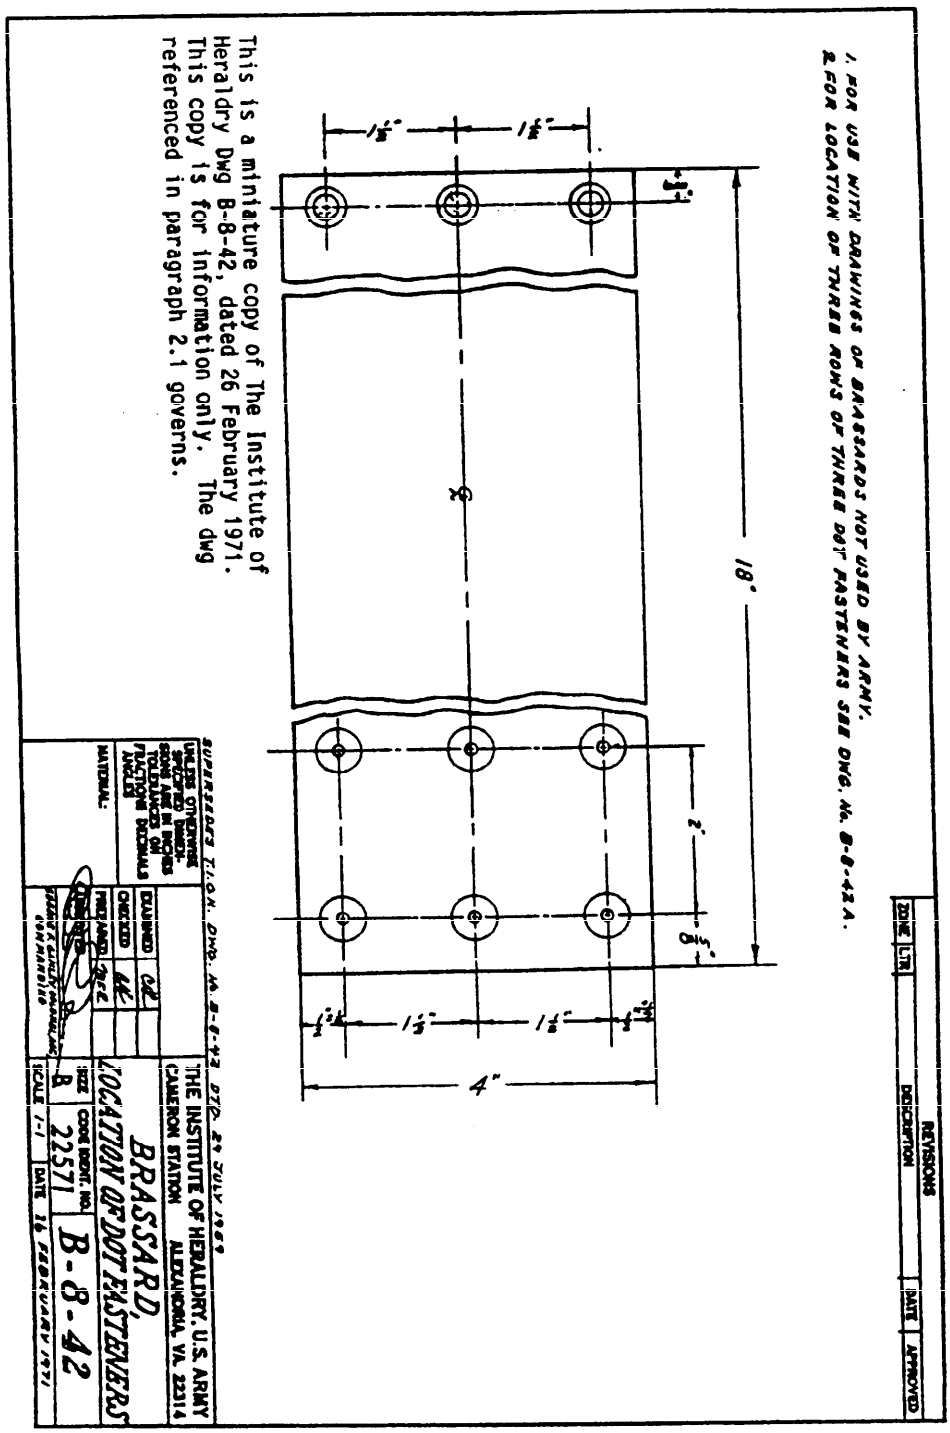


FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:48Z
Check the source to verify that this is the current version before use.

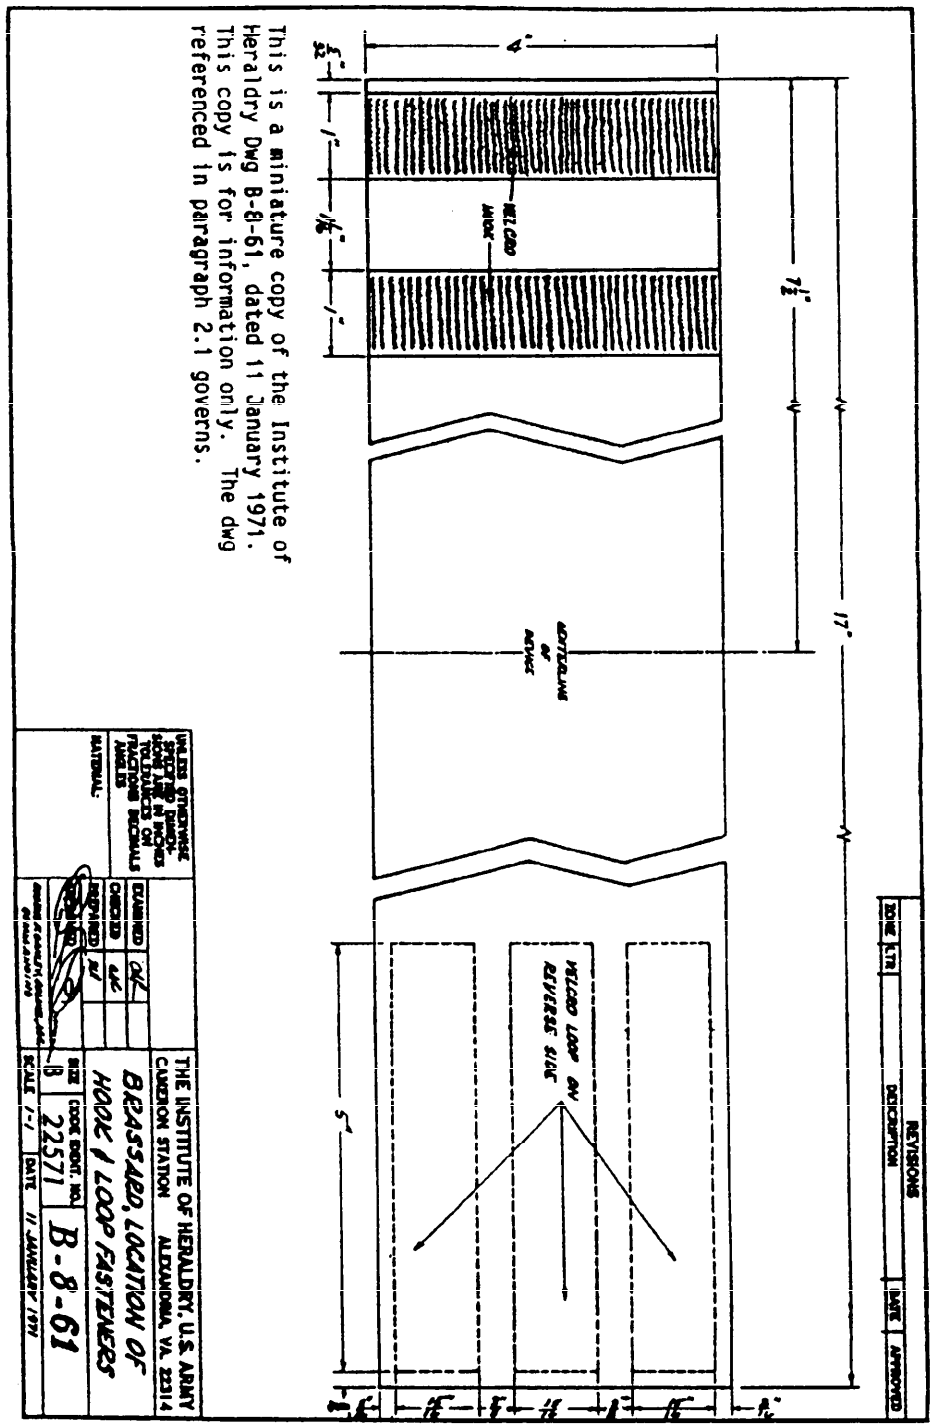


FIGURE 3

Source: https://assist.dla.mil -- Downloaded: 20260-16T17:48Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-B-3476H	910510

3. DOCUMENT TITLE
BRASSARD, GENERAL SPECIFICATION FOR

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

NAME	b. TELEPHONE (Include Area Code) (1) Commercial	(2) AUTOVON
The Institute of Heraldry	(703) 274-6636	284-6636
c. ADDRESS (Include Zip Code) Bldg 15, Technical & Production Division Cameron Station Alexandria, VA 22304-5050	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

Source: https://assist.dla.mil -- Downloaded: 2024-04-19 17:48Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 202640-16T17:48Z
Check the source to verify that this is the current version before use.