MIL-P-3447D

18 June 1971

SUPERSEDING
MIL-P-3447C
25 September 1967

MILITARY SPECIFICATION

PAPER, MAP (EXCEPT DIAZO-SENSITIZED),

PACKAGING AND PACKING OF

This specification is mandatory for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the packaging, packing, and marking of map paper, except diazo-sensitized, for shipment and storage.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	-	Plastic Film (Polyethylene Thin Gage).
FF-N-105	-	Nails, Wire, Brads, and Staples.
QQ-S-781	-	Steel, Strapping, Flat.
UU-P-268	-	Paper, Kraft, Untreated, Wrapping.
MMM-A-188	-	Adhesive; Urea-Resin-Type (Liquid and Powder).
MMM-A-250	-	Adhesive, Water-Resistant, (For Sealing Fiberboard Boxes).

FSC 9310

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

PPP-B-601 - Boxes, Wood, Cleated Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade, and Cut Shapes).
PPP-T-45 - Tape, Gummed, Paper, Reinforced and Plain, for Sealing and Securing.
PPP-T-60 - Tape: Pressure-Sensitive Adhesive, Waterproof, for Packaging.
PPP-T-76 - Tape Pressure-Sensitive Adhesive Paper, Water Resistant for Carton Sealing.

MILITARY

MIL-B-13239 - Barrier Material, Waterproofed, Flexible all Temperature.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-731 - Quality of Wood Members for Containers and Pallets.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications.- The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC.

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Association, ATTN: Tariff Order Section, 1616 P Street, N. W., Washington, D. C. 20036.)

UNIFORM CLASSIFICATION COMMITTEE

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, Illinois 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

TECHNICAL ASSOCIATION OF THE PULP AND PAPER INDUSTRY (TAPPI) PUBLICATION

T-634, Drop Melting Point Of Petroleum Wax, Including Petroleum

(Copies may be obtained from the Technical Association of the Pulp and Paper Industry, 360 Lexington Ave., New York, N. Y. 10017.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal Agencies.)

3. REQUIREMENTS

3.1 Materials.- Materials shall be as specified herein and in the applicable specifications. Materials not definitely specified shall be of the quality normally used for the intended purpose in the suppliers standard commercial practice.

3.2 Packaging.- Packaging shall be level A or C as specified (see 6.2).

3.2.1 Level A.-

* 3.2.1.1 For sheets packed in boxes.- Unless otherwise specified (see 3.2.1.2) map paper sheets, 20 by 22-1/2 inches and smaller, shall be uniformly stacked in quantities of one ream (500 sheets). Map paper sheets larger than 20 by 22-1/2 inches shall be uniformly stacked in the quantities of one ream (500 sheets) on a fiberboard pad, the same size as the map paper sheets, conforming to type CF, class domestic, variety DW, grade 600 of PPP-F-320. Each ream of map paper shall then be completely wrapped with 40-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. The wrap shall be sealed with adhesive or 2-inch minimum width tape conforming to type III of PPP-T-45. Adhesive, when used, shall not come in contact with the map paper. Each wrapped ream of map paper shall be completely bagged or wrapped with polyethylene. The polyethylene flexible film shall be nominal 0.002 inch thick conforming to type I, grade A, B, or C, finish 1 of L-P-378. All seams other than the closure shall be heat sealed. Closure of the bag or wrap shall be accomplished by double-folding the plastic material at the mouth and taping it to the bag body with one-inch minimum width tape conforming to PPP-T-60, or by heat sealing. All seams and closure effected by heat sealing shall conform to the heat seal strength requirements of L-P-378. Alternatively each ream of map paper shall be wrapped in 2 sheets of minimum 30 pound basis weight commercial kraft paper laminated together with minimum 15 pounds per ream microcrystalene wax. The melting point of the microcrystalene wax used for lamination shall be not less than 140°F. when tested as specified in 4.4.1. The wrap shall be closed by tape or adhesive specified herein. Prior to the closure operation, excessive air within the bag or wrap shall be expelled.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* 3.2.1.2 For skid pack.- When specified (see 6.2), map paper sheets shall be uniformly stacked in quantities of one ream (500 sheets) and ream marked.

* 3.2.2 Level C.- The map paper sheets and rolls when specified (see 6.2), shall be packaged to afford adequate protection against damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

3.3 Packing.- Packing shall be level A, B, or C as specified (see 6.2).

3.3.1 Level A.-

3.3.1.1 Sheets packed in boxes.- Unless otherwise specified (see 3.3.1.2) sheets of map paper packaged as specified in 3.2.1.1 shall be packed as specified in 3.3.1.1.1, 3.3.1.1.2, and 3.3.1.1.3.

3.3.1.1.1 Sheets 20 by 22-1/2 inches and smaller.- Three reams of map paper of like size and description, shall be packed flat in a snug-fitting shipping container conforming to style FTC-L, V3s or V2s of PPP-B-636, or overseas type, style A or B of PPP-B-601. Each fiberboard shipping container shall be provided with a class domestic, minimum grade 600, double-wall corrugated fiberboard liner fabricated and taped in accordance with PPP-B-636. In addition, a top and bottom pad shall be provided, made of the same material as the liner and having dimensions equal to the length and width inside the liner, less one eighth of an inch. Each fiberboard shipping container shall be closed with tape in accordance with the appendix of PPP-B-636. Alternatively, each fiberboard shipping container may be closed by gluing the contacting surfaces of the top and bottom portions of the closed shipping container with a continuously secured and bonded band of waterproof adhesive conforming to type I of MMM-A-250. Each cleated plywood container shall be closed and strapped in accordance with PPP-B-601. Each fiberboard shipping container shall be reinforced in accordance with the appendix of PPP-B-636.

3.3.1.1.2 Sheets 22 by 29 inches, up to and including 22 by 30 inches.- Four reams of map paper of like size and description shall be packed flat in a snug-fitting shipping container as specified in 3.3.1.1.1.

* 3.3.1.1.3 Sheets 30 by 45 inches and larger.- Five reams of map paper of like size and description shall be packed in a snug-fitting shipping container conforming to class 2, style 2, 2-1/2 or 3 of PPP-B-621, or overseas type, style A or B of PPP-B-601. Each box shall be provided with skids in accordance with the requirements of the applicable box specification. Each nailed wood box shall be lined with a full height fiberboard liner, and top and bottom pads fabricated from material conforming to type CF, class weather-resistant, variety SW, grade W6c of PPP-F-320. The top and bottom pads shall have dimensions equal to 1/8 inch less than the length and width inside the liner. Closure and strapping shall be in accordance with the applicable box specification, except the steel straps shall conform to type I or IV, class B of QQ-S-781 and shall be applied adjacent to the skids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* 3.3.1.2 Skid packing.- When specified (see 6.2), map paper of like size and description, ream-marked as specified in 3.2.1.2, shall be skid-packed as specified in 3.3.1.2.1 through 3.3.1.2.5. The total height of the completed skid pack shall be not over 51 inches except that air force shipments of paper over 30 inches wide shall not exceed 48 inches high.

3.3.1.2.1 Skid pack base.-

3.3.1.2.1.1 Skid pack base design.- All bases shall be of the 2-skid runner design with fully sheathed deck. The deckboards shall be attached to the nominal 3-inch dimension of the runners. The runners shall always be parallel to the long dimension of the paper being packed (see figure 1). The outer edge of the skid runner shall be flush with outer edge of the skid base deck. The length of the skid runner shall be equal to the long dimension of the skid, except when two tiers of paper are being packed on a skid base then the length of the skid runner shall be equal to the width of the skid base. The clearance between skid runners shall be not less than 28 inches, except they may be less when skid packing single tiers of paper having dimensions of 30 by 42, 30 by 44-1/2, 30 by 44-3/4, 32 by 42 and 32 by 45. The overall dimensions of the skid base shall be 1/2 $\pm$ 1/8 inch greater in length and in width than the dimensions of the paper being skid-packed, except for single tiers of paper having widths less than 33 inches and not provided for herein. Unless otherwise specified (see 6.2), the width dimensions of these skid bases shall be such as to provide a minimum clearance of 28 inches between skid runners.

* 3.3.1.2.1.2 Skid base construction.- Deckboards and runners shall be made from wood conforming to class 2, group III or IV of MIL-STD-731. Deckboards shall be not less than 1-1/2 inches thick and may be of random width with no width of any board less than 5-1/2 inches. Skid runners shall be not less than 2-1/2 inches thick by not less than 8-1/2 inches high and shall be notched on the upper face across the 2-1/2 inch dimension for application of strapping (see figure 1). The notches shall be 1-1/4 minus 1/4 inches in width and 3/4 minus 1/4 inches in depth. The ends of the skid runners shall not be beveled. Deckboard shall be of uniform thickness butt-joined and nailed to the nominal 3-inch dimension of the skid runner to form an even flat deck surface. Pallet nails not less than 3-1/4 inches long, conforming to type II, style 18 of FF-N-105 shall be used to secure the deckboards to the skid runners. Each deckboard 5-1/2 to 7-1/2, 7-1/2 to 9-1/2, and over 9-1/2 inches wide shall be secured to each skid runner with not less than 3, 4 and 5 nails respectively. All nails shall be staggered to prevent splitting. Splits caused by nailing will not be acceptable. Deckboards shall be pre-drilled as required to prevent splits caused by nailing. The heads of all nails shall be driven below the surface of the deckboards. The edge nails shall be driven not less than one inch from the side edges of the deckboard with the remaining nails evenly spaced between them.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

Nails shall not be driven through the strap slot of the skid runners. Deckboards shall be placed over the strap slots so that at least one nail shall be driven adjacent to each side of the strap slot. All nails bent in driving shall be removed and replaced.

* 3.3.1.2.2 Skid pack cap.- The skid pack cap shall be made of deckboards and crossmembers made from wood conforming to group I or II of MIL-STD-731 and have a length and width dimension the same as the skid base (see figures 1 and 2). The deckboards shall run parallel to the skid base runners, and shall be a minimum of 13/16 inch thick and of random width, with no width dimension less than 5-1/2 inches . Three crossmembers or cleats shall reinforce the top cap and have dimensions of nominal 2 by 4 inches and length equal to the width of the top deck. The crossmembers shall be placed flat, one flush with each end across the deckboards and the third parallel and equidistant between the end crossmembers. The crossmembers shall be secured to the deckboards with cement coated nails conforming to type II, style 7 or 8, minimum 8d of NN-F-105. Each nail shall be driven through the deckboards and the reinforcing crossmembers and clinched a minimum of 1/8 of an inch. The nails shall be staggered in two parallel rows with rows spaced not less than 1-5/8 inch apart, not less than 5/8 inch from each edge of the crossmember, and the nailing pattern beginning and ending approximately 1 inch from each end of the crossmember. The spacing of nails along the crossmembers shall not exceed 3 inches and be not more than 6 inches apart in each row. The inside surface of the skid pack cap shall be even, smooth and free of splinters. All nails bent in driving shall be removed and replaced.

* 3.3.1.2.3 Assembly of skid pack.- The skid base deck shall be covered with a sheet of barrier material conforming to type B-1, B-2 grade A or CW-1 of MIL-B-13239, and shall extend not less than 8 inches beyond all edges of the skid deck. Other commercial barrier materials may be used, provided they meet the waterproofness, temperature and strength requirement of the type B-1 of MIL-B-13239 and do not use asphalt in their construction. A pad of clean paperboard having a combined thickness of not less than 0.120 inch and having the same dimensions as the paper shall be placed over the barrier material. A polyethylene sheeting bag or envelope of nominal 0.002 inch thickness, conforming to type I, grade A, B or C, finish 1 of L-P-378, with seams heat sealed or sealed with tape conforming to PPP-T-60 or PPP-T-76, and of a size to provide a loose fit, shall be placed over the pad of paperboard. The map paper shall then be uniformly stacked within the polyethylene bag or envelope on the skid deck base with one side of the long dimension of the paper even with one edge of the skid deck and parallel to a skid base runner. The polyethylene bag or envelope shall be brought up and over the stacked paper and closed by either heat sealing or sealing with tape as specified herein. A paperboard pad as specified for the bottom, shall be placed over the top of the closed polyethylene bag or envelope. The map paper stack shall then be wrapped and completely covered on all sides and top with one

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

thickness of commercial mill wrapper or minimum 40-pound basis weight (24 by 36-500) kraft paper. The extended barrier material on the deck shall be folded upward around the wrapped paper stack and the stack overwrapped on the four sides and top with barrier material specified herein. All seams of the barrier material wrap shall be completely closed with tape specified herein, waterproof glue, or heat sealed as applicable. The skid pack cap with reinforcing members up, shall then be placed over the stacked paper with the edge of one side of the cap flush with the edge of the stacked paper that is flush with the base. Prior to wrapping stacked paper designated for direct shipment to user (Army Map Service, Naval Oceanographic or Air Force ACIC) (see 3.3.2.2.2 and 6.2), a corner protector made of solid fiberboard not less than 0.060-inch thick and 12 inches wide by a length equal to the height of the stacked paper, scored along the middle of the length dimension shall be placed on each corner, after the kraft wrap or mill wrapper is applied.

* 3.3.1.2.4 Strapping.- Each skid of paper shall be strapped with minimum 3/4 by 0.023-inch flat steel strapping conforming to type I or IV, class B of QQ-S-781. Not less than three straps shall be used in each direction. The cross straps shall be placed on top of each reinforcing member of the cap, down the sides of the pack, through runner slots and across the bottom of the skid base. The outer longitudinal straps shall be placed between 3-5/8 inches and five inches from the edges of the stacked paper with the third strap centered between the outer straps. Prior to strapping, the paper shall be compressed to keep the stack flush on all four sides. The cap and base shall be not more than 1/2 inch out of parallel in any direction. The straps shall be tensioned so as to bite into the wood members of the cap, and secured with seals. Skid packs of paper having a void of 3 inches and over, between the edge of the paper and the outer edge of the skid base or cap shall have the skid deck and cap deck pre-drilled not less than 1/4 inch from the wrapped paper to accommodate the center strapping. When skid deck is pre-drilled the center skid runner strap slots may be omitted on that side of the skid base.

* 3.3.1.2.5 Corner protection.- After strapping is applied, corner protector boards of group I, II, III or IV wood conforming to MIL-STD-731 shall be applied at each corner of skid load. A nominal 2 by 4-inch board shall be applied at each corner of the skid end, outside edge flush with skid side, extending from the bottom edge of the runner to the top surface of the cap reinforcing member and nailed to the end of the runner and top reinforcing member with three nails into the skid and two nails into the cap cross member. A nominal 1 by 4-inch board shall be applied at each corner of the skid side, overlapping the 2-inch dimension of the end board, extending from the bottom edge of skid runner to the top surface of the cap reinforcing member and nailed with a minimum of four nails into the runner, and five nails, equally spaced, into the end upright member, and two nails into the cap crossmember. Skid loads having a void area between the paper and the side of the skid base and cap shall have an additional nominal 2 by 4-inch piece of lumber placed at each end of the skid void side with the nominal 2-inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

dimension against the wrapped paper and the nominal 4-inch dimension flush with the end upright member and nailed with a minimum of five nails spaced an equal distant apart. The inner surface of the reinforcing members in contact with the wrapped paper shall be smooth and free of splinters. The heads of nails shall be driven below the surface of the boards. Splits caused by nailing will not be acceptable. Nails shall be cement-coated. Nails to secure the 2 by 4-inch member to the skid runner shall be as specified in 3.3.1.2.1.2, and to the cap crossmember shall be as specified in 3.3.1.2.2 except size shall be 10d. All other nails used shall be as specified in 3.3.1.2.2.

3.3.1.3 Roll packing.- Rolls put up as specified in the procurement document shall be wrapped overall with waterproof barrier material conforming to type B-1 or B-2, grade A or B stretchable, CW-1 or CW-2, class 1 or 2 of MIL-B-13239, or other barrier material free of asphalt provided they meet the physical requirements of B-1 or B-2 above. The wrapper shall be closed at the ends by means of inside and outside headers of the same material as the wrapper. The seams of the wrapper and headers shall be heat sealed or sealed with a continuous strip of adhesive conforming to MMM-A-250 or MMM-A-188, or a continuous strip of hot melt adhesive, or other equivalent adhesive or a continuous strip of miminum 3 inch width tape conforming to PPP-T-60 or class 1 of PPP-T-76. The adhesive shall be applied so that there is no contact between the adhesive and the paper being packed.

3.3.2 Level B.-

* 3.3.2.1 Unless otherwise specified (see 3.3.2.2), sheets of map paper packaged as specified in 3.2.1.1, shall be packed as specified in 3.3.2.1.1 and 3.3.2.1.2.

* 3.3.2.1.1 Sheets 22 by 30 inches and smaller.- Map paper of like size and description, shall be packed in quantities not to exceed 260 pounds in a snug-fitting fiberboard shipping container conforming to style FTC-L, type CF, variety SW, class domestic, grade 350 of PPP-B-636. Each shipping container shall be lined, and provided with top and bottom pads, as specified in 3.3.1.1. Closure and strapping shall be in accordance with method II of PPP-B-636. When specified (see 6.2), the shipping container shall be made of V3c, V3s, or V4s fiberboard of PPP-B-636.

3.3.2.1.2 Sheets 30 by 45 inches and larger.- Five reams of map paper of like size and description, shall be packed in a snugfitting shipping container conforming to domestic type, style A or B of PPP-B-601, or class 1, style 2, 2-1/2, or 3 of PPP-B-621. Each box shall be provided with skids in accordance with the requirements of the box specification. Each nailed wood box shall be provided with a box liner, and top and bottom pads as specified in 3.3.1.1.3, except the fiberboard shall conform to class domestic, grade 200.

3.3.2.2 Skid packing.- When specified (see 6.2) the map paper shall be skid packed as specified in 3.3.2.2.1 or 3.3.2.2.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* 3.3.2.2.1 Skid packing for storage.- Unless otherwise specified (see 3.3.2.2.2), skid packing shall be as specified in 3.3.1.2 through 3.3.1.2.5, except that class 2, groups II, III or IV woods of MIL-STD-731 may be used for deckboards; deckboards may be random width with no board less than 5-1/4 inches wide and not less than 1-3/8 inches thick and barrier material may be type B-2, grade A stretchable of MIL-B-13239. Corner protectors shall be applied. When specified (see 6.2), one corner section of each skid including the runner of single tiered paper shall be cut off three inches from the corner along each edge of the skid base and skids which hold two tiers of paper shall have two corners cut off on the same end of the skid base (see figure 2). When corner of base is cut off, the 1 by 4 reinforcing members specified in 3.3.1.2.5 shall be replaced by nominal 1 by 6 inch boards and 2 nails used to secure the 1 by 6 upright to the skid runner (see 3.3.1.2.5).

* 3.3.2.2.2 Skid packing for direct shipment to user.- When specified (see 6.2), the map paper shall be skid-packed for direct shipment to the user as specified in 3.3.1.2 through 3.3.1.2.4, except that class 2, groups II, III, or IV woods of MIL-STD-731 may be used for deckboards; deckboards may be random width with no board less than 5-1/4 inches wide and not less than 1-3/8 inches thick; strapping may be type I or IV of QQ-S-781, and barrier material may be type B-2, grade A stretchable of MIL-B-13239. Corner protectors shall not be required. When specified (see 6.2), the corner(s) of the skid base shall be cut as specified in 3.3.2.2.1

* 3.3.2.3 Roll packing.- Each roll of map paper shall be wrapped overall with a minimum 80 pound basis weight kraft paper conforming to UU-P-268. The wrapper shall be closed at the ends of the roll by means of inside and outside headers of the same material as the wrapper. The seams of the wrapper and the headers shall be securely sealed with an adhesive commercially used for this purpose.

3.3.3 Level C.- Map paper, packaged as specified in 3.2, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or Motor Freight Classification as applicable.

3.4 Marking.- In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

3.4.1 Skid pack marking.- Skid packs shall be marked as specified in 3.4 with the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

a. Federal stock number
b. Nomenclature (including rag content, if any)
c. Size of sheet and color
d. Number of sheets in skids
e. Contract or order number and contractor name
f. Manufacturers name (if other than)
g. Month and year packed
h. Net weight and gross weight and cube of skid
i. Skid number (in sequence throughout the order)

* 3.5 Workmanship.- Skid pack shall be square, even and tightly packed. Rolls shall be tightly wrapped and adhesive shall not contact the paper being packed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection.- Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, in the contract or order the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection.- Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Component and material inspection.- In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of 3.2.1.1 and of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4.3 Inspection of the end item.-

* 4.3.1 Examination of the end item for packaging, packing and marking.- Examination of the end item shall be in accordance with the defects set forth in tables I and II. The sample unit shall be one package or shipping container as applicable and the lot shall be expressed in packages or shipping containers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* 4.3.1.1 Inspection levels and acceptable quality levels for examination .- The inspection levels for determining the sample size and the acceptable quality levels (AQL's) expressed in defects per 100 units, (DHU) shall be as follows:

Table Number	Inspection Levels	AQL's
Table I	S-2	4.0
Table II	S-2	4.0

4.3.1.2 Examination of shipping containers.- When shipping containers are required to be in accordance with PPP-B-601, PPP-B-621 or PPP-B-636 examination for closure and strapping shall be in accordance with the applicable specification.

TABLE I.- Examination of packaging

Examine	Defect
Map paper	Less than 500 sheets per package (when applicable). Fiberboard pad missing when specified. Fiberboard pad not material specified. Size of pad 1/16 inch more or less than size of map paper. Not completely wrapped as specified.
Wrapper	Not sealed as specified. Adhesive when used is contacting paper.
Overwrap	All seams not heat sealed. Bag closure not double folded and taped when specified. Excess air in wrap or bag.

* TABLE II.- Examination of packing

Examine	Defect
Map paper box packing	
Sheets smaller than 20 by 22-1/2	More or less than three reams per box. More than 260 pounds (level B only).
Sheets from 22 by 29 to 22 by 30	More or less than four reams per box.
Sheets from 30 by 45 and larger	More or less than five reams per box.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* TABLE II.- Examination of packing (cont'd)

Examine	Defect
Map paper box packing (cont'd)	
Reams	Not like size or description. Not stacked flat. Stack not uniform.
Shipping container	Not style specified. Not snug fitting.
Liner and pads	Not material specified. Missing. Dimensions not as specified.
Closure	Alternative method when used not as specified.
Reinforcement	Not material specified. Straps not applied as specified. One or more straps missing.
Skids (box)	Missing. Total height exceeds 51 inches. Not applied as specified.
Skid pack	Not stacked parallel and adjacent to one edge of skid. Ream mark missing. Polyethylene bags not as specified. Barrier material missing from base. Paperboard missing from base or top. Paperbaord less than 0.120 inch combined thickness. Paperboard not same size as map paper package ± 1/16 inch. Stack not compressed as required.
Wrap	Kraft wrapper or mill wrapper missing. Less than 40 pound basis weight kraft paper or mill wrapper. Paperboard corner protectors not as specified. One or more protectors missing (when specified). Barrier material omitted from base. Barrier material not formed, or wrapped and sealed as specified. Wooden corner protectors not applied as specified. Additional corner members missing when specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* TABLE II.- Examination of packing (cont'd)

Examine	Defect
Wap paper box packing (cont'd)	
Wood members	Not species specified. Size not as specified. Cap and base deck board not uniform thickness. Boards split.
Nails and nailing	Not type and size specified. Number less than specified. Not staggered. Heads not driven below surface of wood member. Driven through strap slot. Less than 1 nail adjacent to each side of strap slot. Spacing less than specified.
Dimensions	Overall dimensions exceed those specified.
Skid base	Not constructed as specified.
Deck boards or skids	Less than minimum dimensions specified. Skid runners not notched as specified. Not pre-drilled as specified.
Cap	Not constructed as specified. Not pre-drilled as specified. Not parallel to base as specified. Less than minimum dimensions specified.
Strapping	Not applied as specified. Not type or class specified. Less than three straps in each direction. Not 3-5/8 to 5 inches from edge of stack. Size less than specified.
Roll packing	Wrapper not as specified. Wrapper not sealed as specified. Headers missing or not sealed as specified. Headers not same material as wrappers.

Source: https://assist.dla.mil -- Downloaded: 202610-16T17:42Z
Check the source to verify that this is the current version before use.

* TABLE II.- Examination of packing (cont'd)

Examine	Defect
Map paper box packing (cont'd)	
Workmanship	Skid packs not square, even or tightly packed. Rolls not tightly wrapped, and adhesive contacts paper being packed.
Marking	Omitted, incomplete, incorrect, illegible, or improper size, location, sequence or method of application.

* 4.4 Test.-

* 4.4.1 Melting point of wax.- The test for this characteristic shall be Method T-634 of TAPPI Test Methods. Samples required for the test shall be selected at random. Failure of the item to meet the requirements of 3.2.1.1 shall be cause for rejection of the material.

5. PREPARATION FOR DELIVERY.- Not applicable.

6. NOTES

* 6.1 Intended use.- For packaging, packing and marking shipments of map paper, except diazo-sensitized.

* 6.2 Ordering data.- Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Selection of the applicable levels of packaging and packing (see 3.2 and 3.3).
(c) When skid packing is required (see 3.2.1.2, 3.3.1.2, 3.3.2.2 and 3.3.2.2.2).
(d) When less clearance is required between skid runners (22 inches for Navy and 25 inches for Air Force) (see 3.3.1.2.1.1).
(e) When V3c, V3s or V4s fiberboard is required for level B shipments (see 3.3.2.1.1).
(f) When corner section of skids must be cut (see 3.3.1.2.3, 3.3.2.2.1 and 3.3.2.2.2).
(g) When rolls are specified (see 3.2.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

* 6.3 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 84

Review activity:

Army - ME

User activity:


Navy - MC

Preparing activity:

Army - GL


Project No. 9310-0088

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

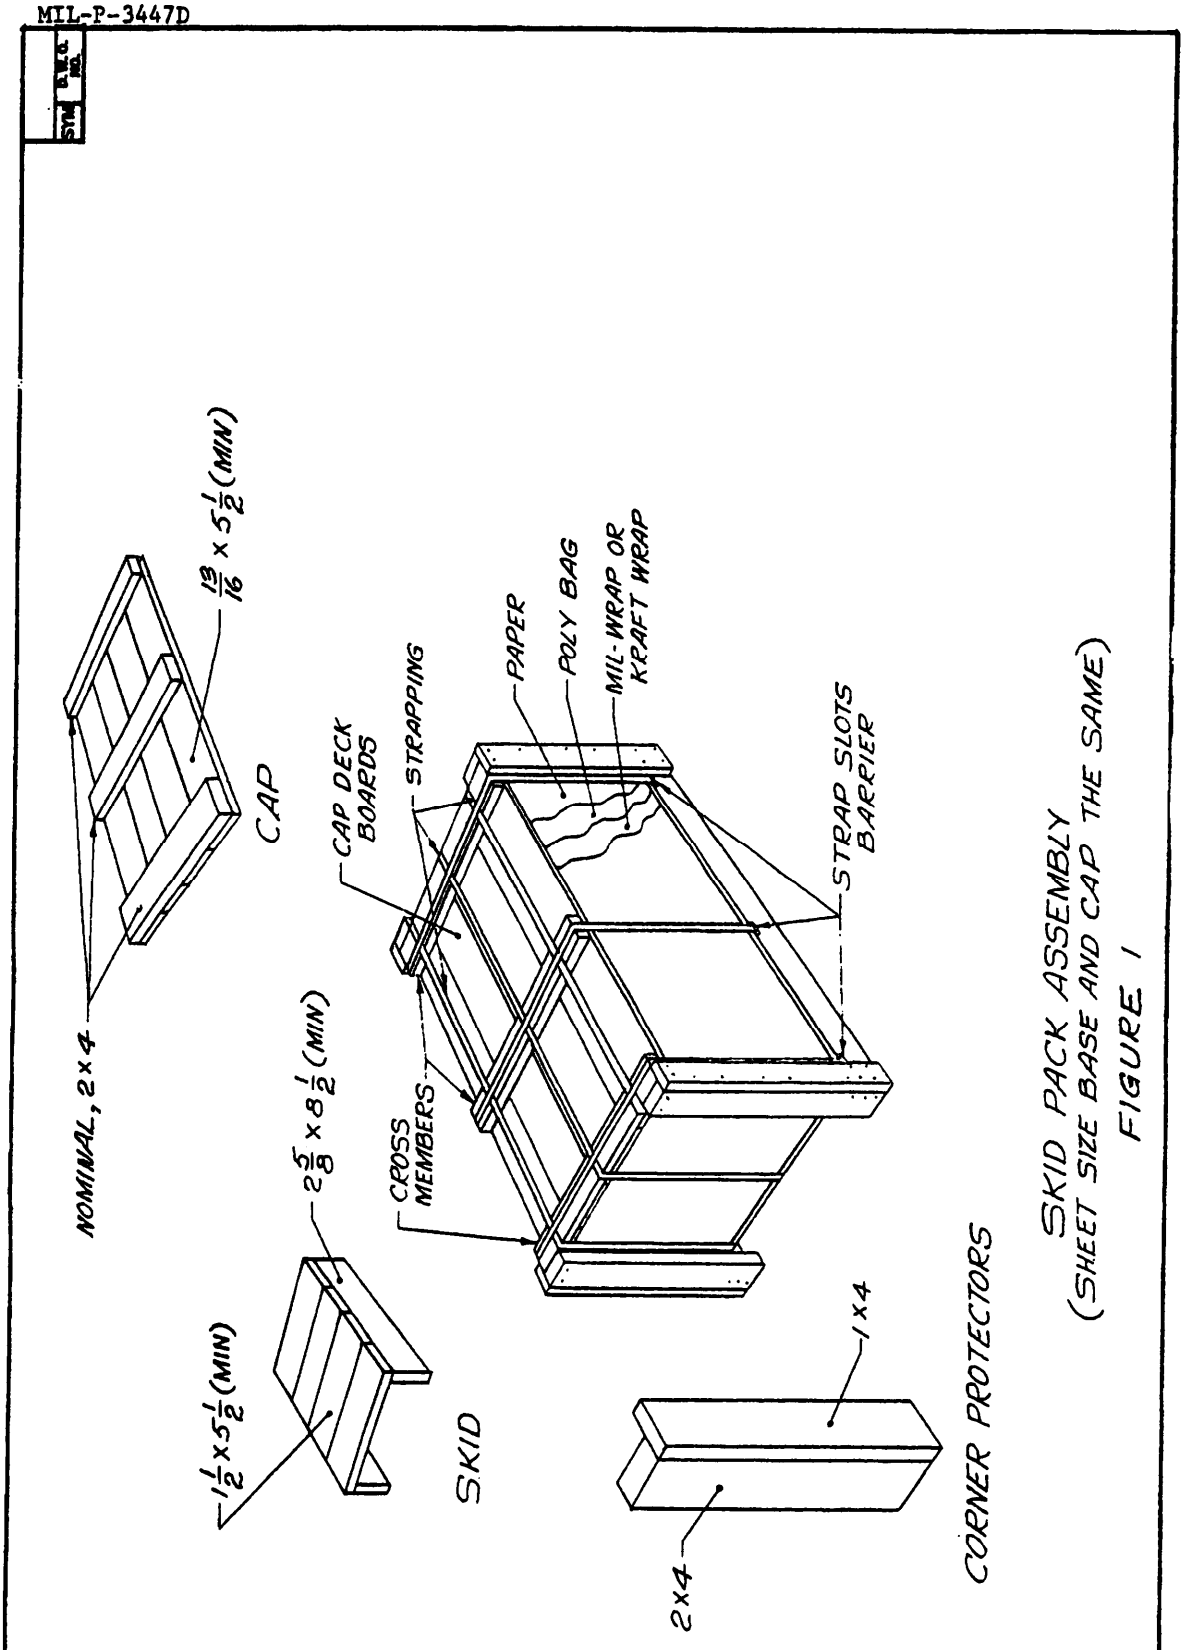

SKID PACK ASSEMBLY
(SHEET SIZE BASE AND CAP THE SAME)
FIGURE 1

Source: https://assist.dla.mil -- Downloaded: 20260-16T17:42Z
Check the source to verify that this is the current version before use.

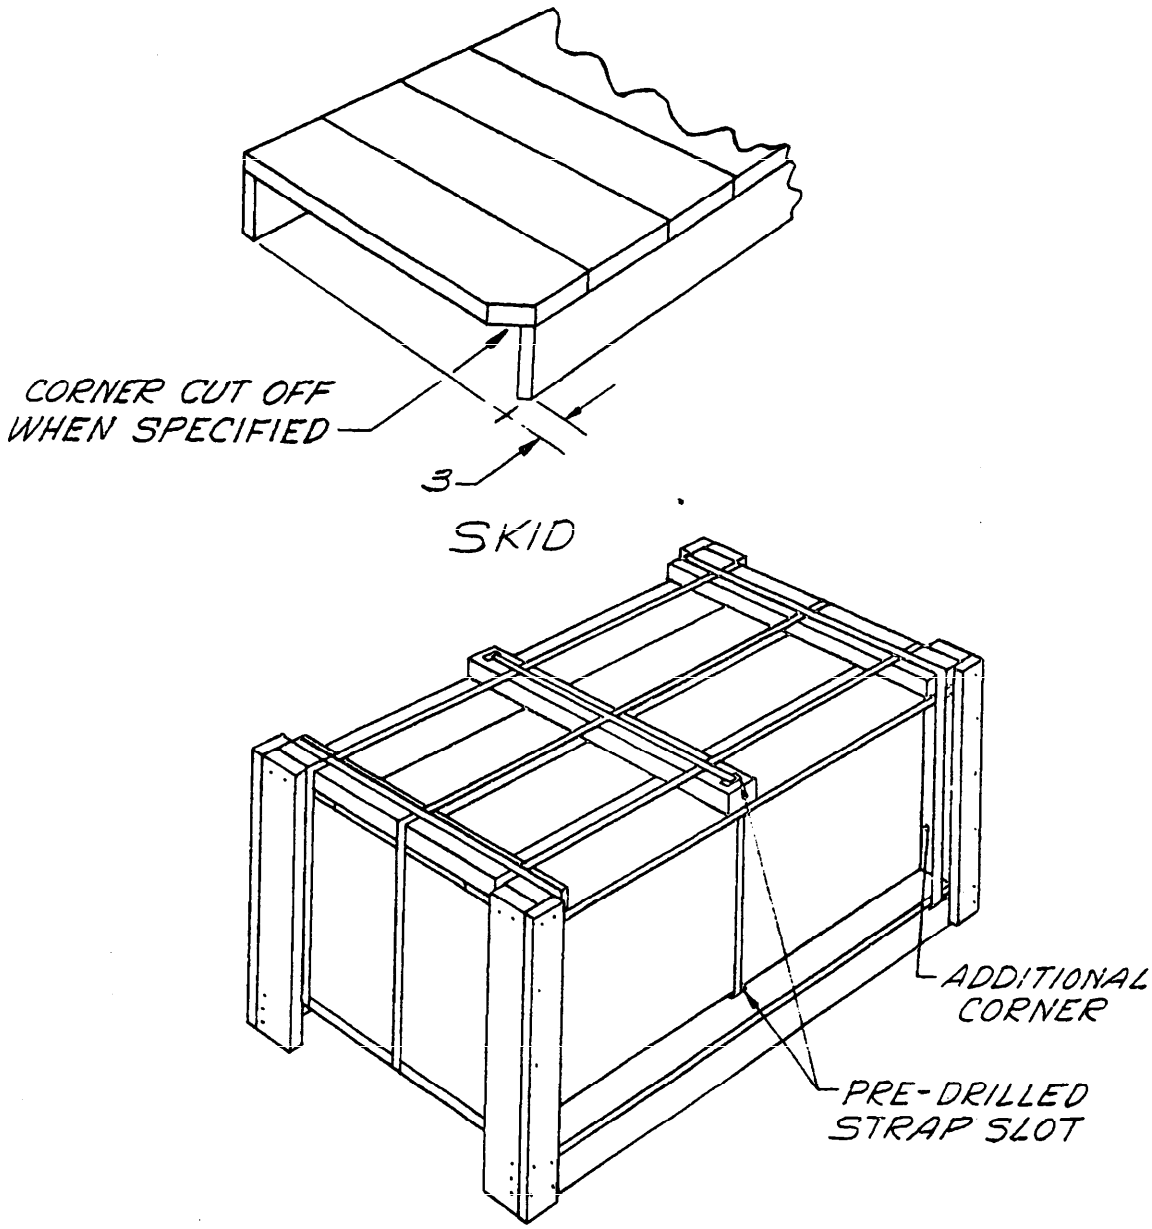

SKID PACK ASSEMBLY
(SHEET SIZE LESS THAN BASE AND CAP)

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

Paper, Map (Except Diazo-Sensitized), Packaging And Packing Of MIL-P-3447D

ORGANIZATION

CITY AND STATE	CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*	DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
U. S. Army Natick Laboratories
Natick, Massachusetts 01760

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS

Commanding General
U. S. Army Natick Laboratories
ATTN: AMXRES-EQS
Natick, Massachusetts 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-16T17:42Z
Check the source to verify that this is the current version before use.