
MILITARY SPECIFICATION SHEET

# FILTERS, RADIO FREQUENCY INTERFERENCE


## STYLE FL87

This specification sheet is approved for use by Aeronautical Systems Division, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for procuring the filters described herein shall consist of this document and the latest issue of Specification MIL-F-15733.

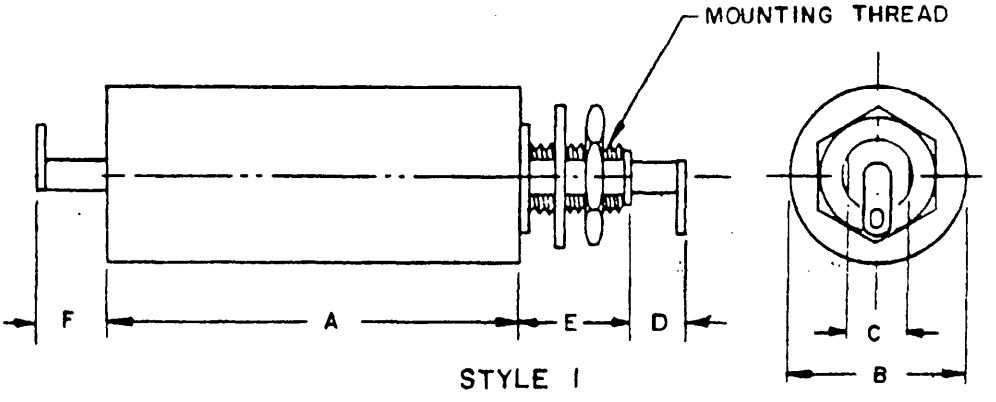


STYLE 1

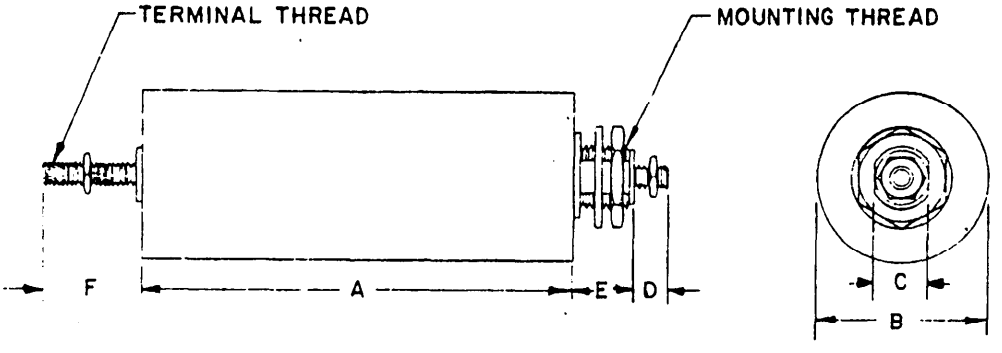


STYLE 2



TYPICAL CIRCUIT DIAGRAM

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
4. Circuit diagram is for information only.
5. Mounting hardware shall be supplied with filter.

FIGURE 1. Case and circuit configuration.

FSC 5915



Source: https://assist.dla.mil - Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

TABLE I. Physical characteristics.

| Style no. | Dash no. | Type designation | Dimensions | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | A | | B | C | D | E | | F | Terminal thread | Mounting thread |
| | | | Min | Max | Max | Max | Max | Min | Max | Max | | |
| 1 | 0001 | FL87CB1ED3 | 2.94 (74.7) | 3.06 (77.7) | 1.02 (25.9) | .380 (9.65) | .25 (6.4) | .420 (10.67) | .440 (11.18) | .25 (6.4) | N/A | .438-20UNF-2A |
| 1 | 0002 | FL87DB1ED3 | 3.81 (96.8) | 3.93 (99.8) | 1.15 (29.2) | .380 (9.65) | .25 (6.4) | .420 (10.67) | .440 (11.18) | .25 (6.4) | N/A | .438-20UNF-2A |
| 2 | 0003 | FL87EB3JD3 | 3.69 (93.7) | 3.81 (96.8) | 1.52 (38.6) | .666 (16.92) | .69 (17.5) | .480 (12.19) | .520 (13.21) | .69 (17.5) | .164-32UNC-2A | .750-20UNEF-2A |
| 2 | 0004 | FL87FB3JD3 | 4.32 (109.7) | 4.44 (112.8) | 1.52 (38.6) | .666 (16.92) | .69 (17.5) | .480 (12.19) | .520 (13.21) | .69 (17.5) | .164-32UNC-2A | .750-20UNEF-2A |
| 2 | 0005 | FL87GB3JD3 | 4.94 (125.5) | 5.06 (128.5) | 1.77 (45.0) | .666 (16.92) | .69 (17.5) | .480 (12.19) | .520 (13.21) | .69 (17.5) | .164-32UNC-2A | .750-20UNEF-2A |
| 2 | 0006 | FL87JB3JD3 | 4.94 (125.5) | 5.06 (128.5) | 1.77 (45.0) | .666 (16.92) | .69 (17.5) | .480 (12.19) | .520 (13.21) | .69 (17.5) | .164-32UNC-2A | .750-20UNEF-2A |
| 2 | 0007 | FL87LB3KD3 | 5.44 (138.2) | 5.56 (141.2) | 2.27 (57.7) | 1.075 (27.30) | .81 (20.6) | .540 (13.72) | .580 (14.73) | .81 (20.6) | .190-32UNF-2A | 1.125-18UNEF-2A |
| 2 | 0008 | FL87WB3WD3 | 6.44 (163.6) | 6.56 (166.6) | 2.27 (57.7) | 1.075 (27.30) | .88 (22.4) | .540 (13.72) | .580 (14.73) | .88 (22.4) | .250-20UNC-2A | 1.125-18UNEF-2A |



Source: https://assist.dla.mil -- 2 -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

TABLE II. Electrical characteristics.

| Dash no. | Rated current (amps) | Minimum insertion loss (dB) in accordance with MIL-STD-220 at 25°C 1/ | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | | 150 kHz | 300 kHz | 600 kHz | 1 MHz | 10 MHz | 100 MHz | 1 GHz |
| 0001 | .5 | 40 | 50 | 60 | 60 | 60 | 60 | 60 |
| 0002 | 1 | 40 | 50 | 60 | 60 | 60 | 60 | 60 |
| 0003 | 3 | 40 | 50 | 60 | 60 | 60 | 60 | 60 |
| 0004 | 5 | 40 | 50 | 60 | 60 | 60 | 60 | 60 |
| 0005 | 10 | 40 | 50 | 60 | 60 | 60 | 60 | 60 |
| 0006 | 20 | 37 | 46 | 54 | 58 | 60 | 60 | 60 |
| 0007 | 30 | 37 | 46 | 54 | 58 | 60 | 60 | 60 |
| 0008 | 50 | 37 | 46 | 54 | 58 | 60 | 60 | 60 |

1/ No load insertion loss measurements shall be performed at 100 MHz and 1 GHz. Full load insertion loss measurements shall be performed from 150 kHz to 10 MHz.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Configuration and dimensions: See figure 1 and table I.

Rated voltage: 400 Vdc, 115 Vac.

Rated current: See table II.

Insertion loss characteristic: See table II.

Operating temperature range: -55° to +125°C.

Insulation resistance: 1,000 megohms minimum where measured at +25°C between both terminals connected together and the case.

Terminal strength: Method 211 of MIL-STD-202.
Pull test: Test condition A - - - 9 pounds.
Bend test: Test condition B - - - 5 bends.
Torque test: Test condition E (threaded stud terminals only).

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202 (solder lug terminals only).

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion cycling:
Thermal shock: Method 107, test condition A, MIL-STD-202, except temperature at step 3 shall be +125°C.
Immersion cycling: Method 104, test condition A, MIL-STD-202.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Vibration, high frequency: Method 204, test condition B, MIL-STD-202.

Moisture resistance:
Thermal shock: Method 107, test condition A, MIL-STD-202, except temperature at step 3 shall be +125°C.
Moisture resistance: Method 106 of MIL-STD-202.

Life: Method 108, test condition B (250 hours), MIL-STD-202.
Test voltage: 1.2 times rated ac voltage.

Part number: M15733/65- (dash number from table).

Revision letters are not used to denote changes due to the extensiveness of the changes.

Preparing activity:
Air Force - 11

Agent:
DLA - ES

(Project 5915-F192-2)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:29Z
Check the source to verify that this is the current version before use.