NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

INCH-POUND


MIL-PRF-15733/56C(USAF)
31 August 1992
SUPERSEDING
MIL-F-15733/56B(USAF)
8 June 1979

PERFORMANCE SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE SUPPRESSION, HERMETICALLY SEALED, STYLE FL61

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

The requirement for the acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation: MIL-F-15733.

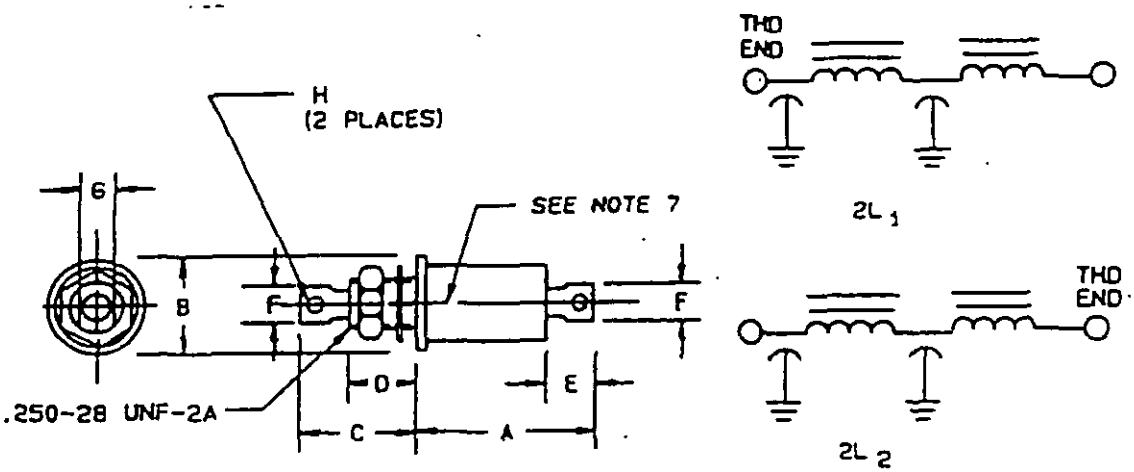

CIRCUIT CONFIGURATION (2L)

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware consisting of a phosphor bronze internal tooth lockwasher, and a brass hexagonal nut, both shall be silver plated.
5. Use of style FL61 with or without shoulder is optional.
6. Terminal identification (nonsymmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "C" or "L" as follows:

Circuit	Symbol
$2L_1$	C
$2L_2$	L

FIGURE 1. Case and circuit configuration

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:25Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Case: Silver-plated metal.

Weight: 8.5 grams, maximum (0001 and 0002).
9 grams, maximum (0003).

Terminals: Solderable.

Seal: Glass to metal.

Operating temperature range: -55°C to +125°C.

Rated voltage: 50 V dc.

Rated current: See table II.

Insertion loss: See table II.

Seal: Method 112, test condition A, MIL-STD-202.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

Test temperature: 25°C.

Test voltage: 100 V dc applied between each terminal and ground, for a period of 1 to 5 seconds.

Maximum charging current: 50 milliamperes.

Barometric pressure (reduced): Method 105, test condition B (50,000 feet), MIL-STD-202.

Dielectric withstanding voltage: 125 percent of the rated dc voltage.

Maximum charging current: 50 milliamperes.

Insulation resistance: Method 302, test condition A, MIL-STD-202.

Test temperature: 25°C.

Test potential: 200 percent of rated dc voltage.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 1,000 megohms.

Voltage drop: See table II.

Insertion loss: In accordance with MIL-STD-220 and table II.

Insertion loss (check test): In accordance with MIL-F-15733.

Terminal strength: Method 211, test condition A (pull), MIL-STD-202.

Force: 5 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:25Z
Check the source to verify that this is the current version before use.

TABLE I. Dimensions.

Dash number	A	B	C	D		E	F		G		H
	Max	Max	Max	Min	Max	Max	Min	Max	Min	Max	Slot or hole ±.010
0001	1.050 (26.67)	.410 (10.41)	.352 (8.94)	.177 (4.50)	.197 (5.00)	.190 (4.83)	.085 (2.16)	.105 (2.67)	.196 (4.98)	.206 (5.23)	.050 x .070 or .050 dia
0002	1.050 (26.67)	.410 (10.41)	.352 (8.94)	.177 (4.50)	.197 (5.00)	.190 (4.83)	.085 (2.16)	.105 (2.67)	.196 (4.98)	.206 (5.23)	.050 x .070 or .050 dia
0003	1.09 (27.7)	.416 (10.57)	.352 (8.94)	.180 (4.57)	.200 (5.08)	.190 (4.83)	.085 (2.16) REF	.105 (2.67) REF	.196 (4.98)	.206 (5.23)	.050 x .070 or .050 dia

TABLE II. Electrical characteristics.

Dash number	Circuit configuration	DC resistance (ohms)	Maximum rated current (amperes)	Maximum voltage drop (volts)	Minimum full-load insertion loss (dB) in accordance with MIL-STD-220 at 25°C
					Above 1 MHz
0001	$2L_1$	.1	2.0	.2	80
0002	$2L_1$	1.5	.3	.45	80
0003	$2L_2$	5	.1	.5	55 dB at 50 kHz, 90 dB from 120 kHz to 1 GHz

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:25Z
Check the source to verify that this is the current version before use.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycling:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirements.

Insertion loss (check test): Shall be measured and shall meet the initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of the rated dc voltage shall be applied between the terminals and case.

Vibration, high frequency: Method 204, test condition B (20 g's), MIL-STD-202.

Electrical load: Rated dc voltage and current as specified in table II, and shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open- or short-circuiting.

After vibration test: Filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Moisture resistance: Method 107, test condition A, MIL-STD-202, except the temperature at step 3 shall be +125°C. No measurement shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 28 V dc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 50 megohms.

Insertion loss (check test): Shall be measured and shall meet the initial requirements.

Life: Method 108, test condition D (1,000 hours), MIL-STD-202 for qualification inspection. Test condition B (250 hours) for group C inspection.

Test temperature: +125°C.

Test voltage: 1.4 times rated dc voltage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:25Z
Check the source to verify that this is the current version before use.

Measurements after test:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirements.

Insertion loss (check test): Shall be measured and shall meet the initial requirements.

Part or Identifying Number (PIN): M15733/56- (dash number from table I).

Revision letters are not used to denote changes due to the extensiveness of the changes.

CONCLUDING MATERIAL

Preparing activity:
Air Force - 85

Agent:
DLA - ES

(Project 5915-F229)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:25Z
Check the source to verify that this is the current version before use.