NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.

MIL-PRF-15733/57B(USAF)
16 December 1981
SUPERSEDING
MIL-F-15733/57A(USAF)
14 August 1980

PERFORMANCE SPECIFICATION SHEET

FILTER, RADIO FREQUENCY INTERFERENCE, HERMETICALLY SEALED, STYLE FL62

This specification is approved for use by the Aeronautical Systems Division, Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filter described herein shall consist of this specification and the latest issue of MIL-F-15733.

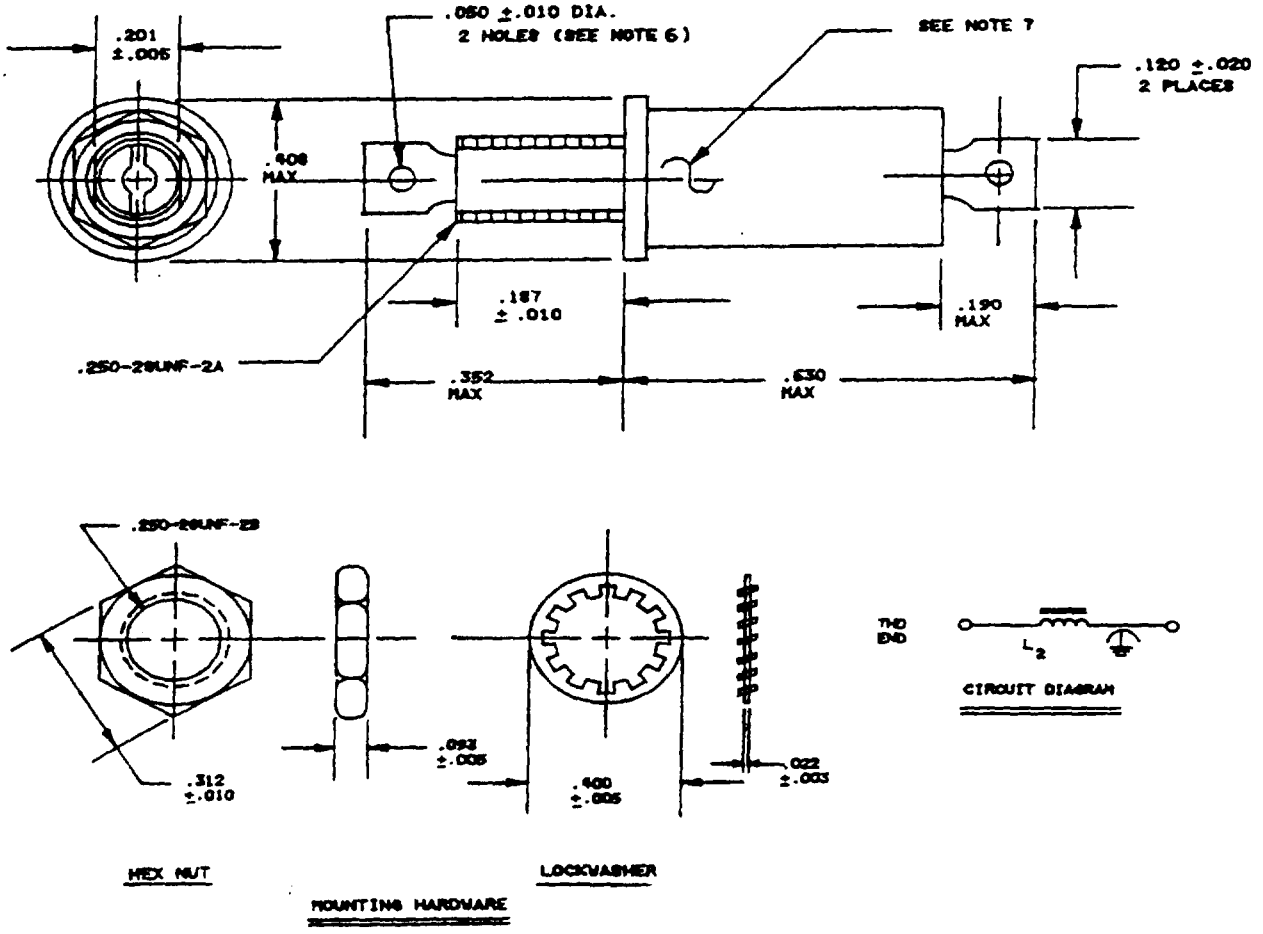


FIGURE 1. Case dimensions and circuit diagram

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:26Z
Check the source to verify that this is the current version before use.

INCHES	MM
.003	.08
.005	.13
.010	.25
.020	.51
.022	.56
.050	1.27
.070	1.78
.093	2.36
.120	3.05
.187	4.75
.190	4.83
.201	5.11
.250	6.35
.312	7.92
.352	8.94
.400	10.16
.408	10.36
.630	16.00

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. All filters shall be supplied with mounting hardware.
5. Use of style FL62 with or without shoulder is optional.
6. Optional terminal hole .070 ±.010 inches or terminal slot .050 ±.010 X .070 ±.010 inches may be supplied.
7. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter with the symbol "L".

FIGURE 1. Case dimensions and circuit diagram - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:26Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1.

Case: Metal.

Terminals: Solder lug.

Operating temperature range: -55° to +125°C.

Rated voltage: 150 Vdc at 125°C; 125 Vac, 400 hertz at 125°C.

Rated current: See table I.

TABLE I. Electrical characteristics.

Dash number	Maximum rated current (ampere)	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/													
		At +25°C							At -55°C and +125°C						
		100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz	100 kHz	150 kHz	300 kHz	1 MHz	10 MHz	100 MHz	1 GHz
0001	0.5	18	24	28	58	60	60	60	16	22	26	56	60	60	60

1/ Insertion loss measurements shall be made under full load over the frequency range of 100 kHz to 10 MHz. Insertion loss measurements above this frequency range shall be under no-load.

Creepage and clearance: Not applicable.

Seal: Method 112, test condition A, MIL-STD-202.

Capacitance to ground: Not applicable.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202.

Test temperature: 25°C.

Test voltage: 2.0 times the rated dc voltage applied between each terminal and ground, for a period of 1 to 5 seconds.

Maximum charging current: 50 milliamperes.

Barometric pressure (reduced): Method 105, test condition C (70,000 ft), MIL-STD-202.

Dielectric withstanding voltage: 125 percent of the rated dc voltage for 60 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Method 302, MIL-STD-202.

Test temperature: 25°C.

Test potential: Rated dc voltage.

Maximum charging current: 150 milliamperes for 2 minutes.

Insulation resistance: Shall be not less than 1,000 megohms.

Voltage drop: .18 volt, maximum.

Insertion loss: In accordance with MIL-STD-220 and table I.

Insertion loss (check test): In accordance with MIL-F-15733.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:26Z
Check the source to verify that this is the current version before use.

Overload: Filters shall be suspended by their terminals in free air at an ambient temperature of 25° ±5°C. A test current of 140 percent of rated current at maximum rated frequency shall be applied for 15 minutes. After the filter has returned to room temperature, the insulation resistance and voltage drop measurements shall meet initial requirements.

Terminal strength: Method 211, test condition A (pull), MIL-STD-202.

Force: 5 pounds.

Solderability: Method 208, MIL-STD-202. All terminals shall be immersed to within 0.05 inch of the body.

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202.

Salt spray (corrosion): Method 101, test condition A, MIL-STD-202.

Thermal shock and immersion:

Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature at step 3 shall be at +125°C.

Immersion: Method 104, test condition A, MIL-STD-202.

Measurements after final cycling:

Dielectric withstanding voltage: 30 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.

Electrical load: 100 percent of the rated dc voltage shall be applied between the terminals and case.

Vibration, high frequency: Method 204, test condition B (15 g), MIL-STD-202.

Electrical load: Rated dc voltage and current shall be applied continuously during test.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent open- or short-circuiting.

After vibration test: Filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Moisture resistance: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125°C. No measurement shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurement: Not applicable.

Polarization voltage: 100 Vdc.

Measurements after 24-hour drying period:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:26Z
Check the source to verify that this is the current version before use.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

Life: Method 108, test condition B (250 hours), MIL-STD-202.

Test temperature: +125°C.

Test voltage: 1.2 times rated ac (rms) voltage.

Measurements after test:

Dielectric withstanding voltage: 90 percent of the initial voltage shall be applied for 5 ±1 seconds.

Maximum charging current: 50 milliamperes.

Insulation resistance: Shall be not less than 30 percent of the initial requirement.

Insertion loss (check test): Shall meet the initial requirements.

Part number: M15733/57-0001.

NOTE: Revision letters are not used to denote changes due to the extensiveness of the changes.

Custodian:
Air Force - 11

Review activity:
DLA - ES

Agent:
DLA - ES

Preparing activity:
Air Force - 11

(Project 5915-F196-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:26Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:26Z
Check the source to verify that this is the current version before use.