
MILITARY SPECIFICATION SHEET

FILTERS, RADIO FREQUENCY INTERFERENCE, STYLES FL30, FL32, FL34, AND FL43

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.

PART NUMBERS M15733/61-0001, 0004, 0005, AND 0010 ARE INACTIVE FOR NEW DESIGN AFTER 4 DECEMBER 1979. FOR NEW DESIGN USE M15733/61-0002, 0003, 0006, AND 0011, RESPECTIVELY.

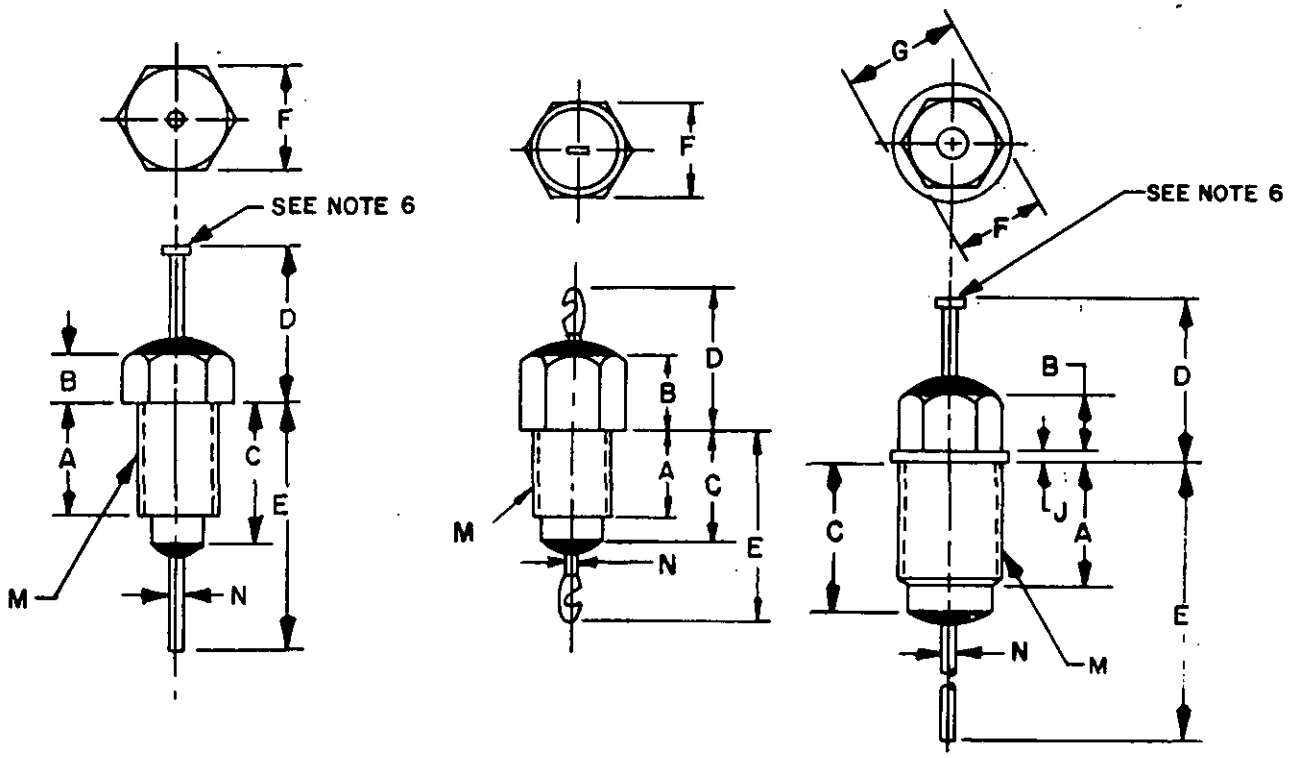


Dash Nos. 0001, 0002, 0008, 0013 and 0014

Dash Nos. 0003 and 0004


Dash Nos. 0005, 0006, 0007, 0010 and 0011

FIGURE 1. Filter and hardware dimensions and circuit configurations.

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:27Z
Check the source to verify that this is the current version before use.

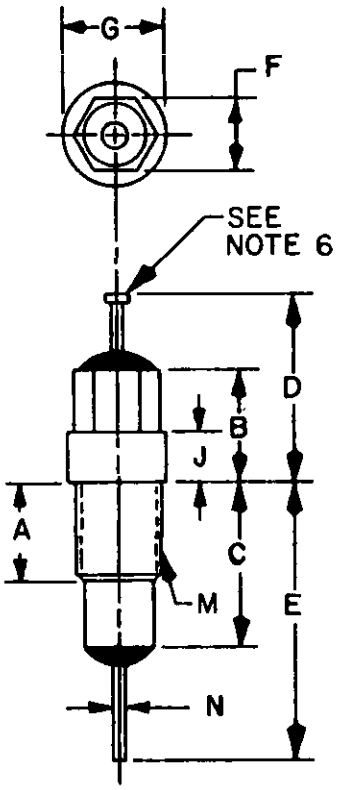


Dash No. 0009

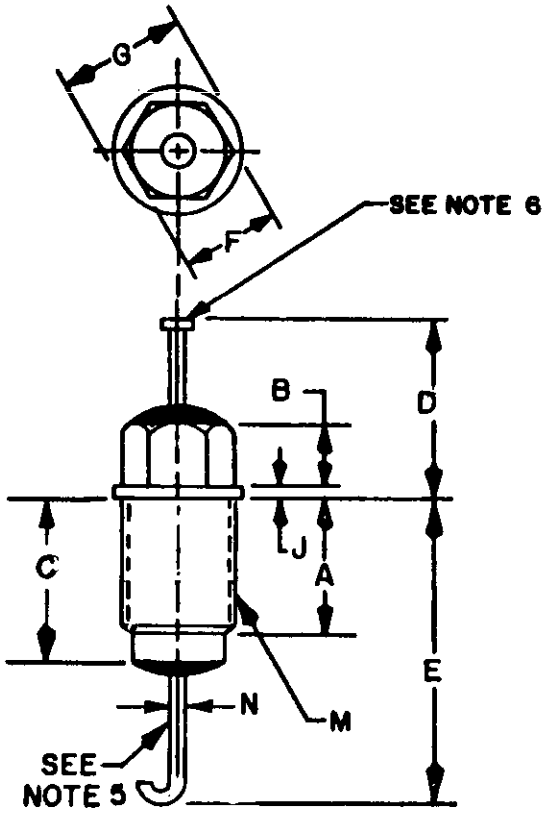

Dash No. 0012

FIGURE 1. Filter and hardware dimensions and circuit configurations - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

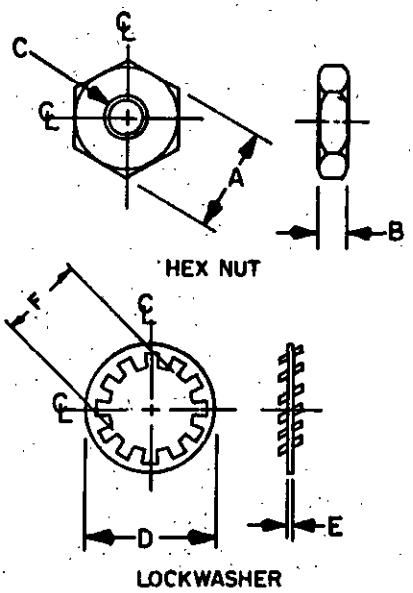



TYPICAL CIRCUIT
DIAGRAMS

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Circuit diagram is for information only.
4. Case is ground terminal.
5. Hook bend radius: .046 (1.17 mm) (REF).
6. Turret headed terminal optional.
7. Mounting hardware (lock washer and hex nut) will be supplied with each filter.
8. Terminal identification (non-symmetrical filters): The case shall be marked at the threaded end of the filter, with the symbol "C" or "L", as follow.

Circuit	
L_1	C
L_2	L

9. Metric equivalents are in parentheses.

FIGURE 1. Filter and hardware dimensions and circuit configurations- Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

TABLE I. Filter dimensions.

Type 1/ Designation	Dash No.	A		B		C		D		E		F	
		Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
FL30	0001	.203 (5.16)	.233 (5.92)	.172 (4.37)	.202 (5.13)	---	.291 (7.39)	.328 (8.33)	.390 (9.91)	.391 (9.93)	.515 (13.08)	.235 (5.97)	.265 (6.73)
FL30	0002	.203 (5.16)	.233 (5.92)	.172 (4.37)	.202 (5.13)	---	.291 (7.39)	.328 (8.33)	.390 (9.91)	.391 (9.93)	.515 (13.08)	.235 (5.97)	.265 (6.73)
FL34	0003	.203 (5.16)	.235 (5.97)	.235 (5.97)	.265 (6.73)	.390 (9.91)	.482 (12.24)	.531 (13.49)	.593 (15.06)	.719 (18.26)	.781 (19.84)	.360 (9.14)	.390 (9.91)
FL35	0004	.203 (5.16)	.235 (5.97)	.235 (5.97)	.265 (6.73)	.390 (9.91)	.482 (12.24)	.531 (13.49)	.593 (15.06)	.719 (18.26)	.781 (19.84)	.360 (9.14)	.390 (9.91)
FL32	0005	.235 (5.97)	.265 (6.73)	.110 (2.79)	.140 (3.56)	.296 (7.52)	.326 (8.28)	.312 (7.92)	.374 (9.50)	.890 (22.61)	.952 (24.18)	.177 (4.50)	.197 (5.00)
FL32	0006	.235 (5.97)	.265 (6.73)	.110 (2.79)	.140 (3.56)	.296 (7.52)	.326 (8.28)	.312 (7.92)	.374 (9.50)	.890 (22.61)	.952 (24.18)	.177 (4.50)	.197 (5.00)
FL32	0007	.240 (6.10)	.260 (6.60)	.115 (2.92)	.135 (3.43)	.296 (7.52)	.326 (8.28)	.312 (7.92)	.374 (9.50)	.890 (22.61)	.952 (24.18)	.177 (4.50)	.197 (5.00)
FL32	0008	.206 (5.23)	.226 (5.74)	.083 (2.11)	.103 (2.62)	---	.276 (7.01)	.281 (7.14)	.343 (8.71)	.363 (9.22)	.549 (13.94)	.177 (4.50)	.197 (5.00)
FL32	0009	.240 (6.10)	.260 (6.60)	.271 (6.88)	.291 (7.39)	.396 (10.06)	.416 (10.57)	.44 (11.2)	.50 (12.7)	.65 (16.5)	.71 (18.0)	.177 (4.50)	.197 (5.00)
FL43	0010	.235 (5.97)	.265 (6.73)	.110 (2.79)	.140 (3.56)	.296 (7.52)	.326 (8.28)	.312 (7.92)	.374 (9.50)	.890 (22.61)	.952 (24.18)	.172 (4.37)	.202 (5.13)
FL43	0011	.235 (5.97)	.265 (6.73)	.110 (2.79)	.140 (3.56)	.296 (7.52)	.326 (8.28)	.312 (7.92)	.374 (9.50)	.890 (22.61)	.952 (24.18)	.172 (4.37)	.202 (5.13)
FL43	0012	.235 (5.97)	.265 (6.73)	.110 (2.79)	.140 (3.56)	.296 (7.52)	.326 (8.28)	.312 (7.92)	.374 (9.50)	.890 (22.61)	.952 (24.18)	.172 (4.37)	.202 (5.13)
FL43	0013	.201 (5.11)	.231 (5.87)	.078 (1.98)	.108 (2.74)	---	.276 (7.01)	---	.312 (7.92)	.859 (21.82)	.921 (23.39)	.171 (4.34)	.202 (5.13)
FL43	0014	.206 (5.23)	.226 (5.74)	.13 (3.3)	.17 (4.3)	---	.315 (8.00)	.31 (7.9)	---	.49 (12.4)	---	.177 (4.50)	.197 (5.00)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

TABLE I. Filter dimensions - Continued.

Dash No.	G		J		M	N 2/	Weight (grams)
	Min	Max	Min	Max	Thread		
0001	---	---	---	---	.216-28 UNEF-2A	AWG20 (.032)	2.6 max
0002	---	---	---	---	.216-32 UNEF-2A	AWG20 (.032)	2.2 max
0003	---	---	---	---	.3125-24 UNF-2A	AWG15 (.057)	7.1 max
0004	---	---	---	---	.3125-32 UNEF-2A	AWG15 (.057)	7.1 max
0005	.235 (5.97)	.265 (6.73)	.017 (.43)	.047 (1.19)	.216-32 UNEF-2A	AWG20 (.032)	2.0 max
0006	.220 (5.59)	.250 (6.35)	.017 (.43)	.047 (1.19)	.216-32 UNEF-2A	AWG20 (.032)	2.0 max
0007	.235 (5.97)	.265 (6.73)	---	.032 (.81)	.216-32 UNEF-2A	AWG20 (.032)	2.0 max
0008	---	---	---	---	.164-32 UNC-2A	AWG20 (.032)	2.0 max
0009	.240 (6.10)	.260 (6.60)	.115 (2.92)	.135 (3.43)	.216-32 UNEF-2A	AWG20 (.032)	3.2 max
0010	.235 (5.97)	.265 (6.73)	---	.032 (.81)	.216-32 UNEF-2A	AWG20 (.032)	2.4 max
0011	.220 (5.59)	.250 (6.35)	---	.032 (.81)	.216-32 UNEF-2A	AWG20 (.032)	2.0 max
0012	---	.235 (5.97)	---	.032 (.81)	.216-32 UNEF-2A	AWG20 (.032)	2.8 max
0013	---	---	---	---	.164-32 UNC-2A	AWG20 (.032)	2.2 max
0014	---	---	---	---	.164-32 UNC-2A	AWG20 (.032)	1.4 max

1/ The type designation does not describe a discrete item. For complete identification, the part number and type designation should be referenced.
2/ The equivalent diameter in inches is shown in the parentheses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

TABLE II. Hardware dimensions.

Dash No.	Hex nut					Lockwasher					
	A		B		C	D		E		F	
	Min	Max	Min	Max	Thread	Min	Max	Min	Max	Min	Max
0001	.235 (5.97)	.265 (6.73)	.070 (1.78)	.080 (2.03)	.216-28 UNEF-2B	.372 (9.45)	.380 (9.65)	.020 (.51)	.024 (.61)	.215 (5.46)	.225 (5.72)
0002,0005 0006,0007 0009 thru 0012	.235 (5.97)	.265 (6.73)	.070 (1.78)	.080 (2.03)	.216-32 UNEF-2B	.372 (9.45)	.380 (9.65)	.020 (.51)	.024 (.61)	.215 (5.46)	.225 (5.72)
0003	.365 (9.27)	.385 (9.78)	.085 (2.16)	.100 (2.54)	.3125-24 UNEF-2B	.425 (10.80)	.435 (11.05)	.012 (.30)	.032 (.81)	.313 (7.95)	.332 (8.43)
0004	.365 (9.27)	.385 (9.78)	.085 (2.16)	.100 (2.54)	.3125-32 UNEF-2B	.425 (10.80)	.435 (11.05)	.012 (.030)	.032 (.81)	.313 (7.95)	.332 (8.43)
0008,0013 0014	.235 (5.97)	.265 (6.73)	.073 (1.85)	.078 (1.98)	.164-32 UNC-2B	.324 (8.23)	.336 (8.53)	.015 (.38)	.025 (.64)	.162 (4.11)	.172 (4.37)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1, and tables I and II.

Weight: See figure 1.

Case: Silver plated.

Terminals: Solderable. Leads shall be tin-lead coated copper wire.

Mounting torque (by dash number):

0001, 0002, 0005, 0006, 0007, 0009 through 0012	- 6 inch pounds, maximum.
0003, 0004	- 8 inch pounds, maximum.
0008, 0013, 0014	- 3 inch pounds, maximum.

Operating temperature range (by dash number):

0001 through 0011, 0013, 0014	- -55°C to +125°C.
0012	- -65°C to +85°C.

Rated voltage: See table III.

Rated current: See table III.

Voltage conditioning (quality conformance inspection only) (applicable to dash numbers 0002, 0003, 0006 through 0014). The test shall be performed as follows:

Test temperature (by dash number):

0002, 0003, 0006 through 0011 0013, 0014	- 125°C +4°C, -0°C.
0012	- 85°C +4°C, -0°C.

Test voltage: 1.4 times rated dc voltage.

Test duration: 168 ± 4 hours.

Capacitance to ground: See table III.

Temperature rise: 25°C, maximum.

Dielectric withstanding voltage: MIL-STD-202, method 301. A test voltage equal to 2.5 times the rated dc voltage shall be applied between either terminal and ground (case) for 1 to 5 seconds. Maximum charging current shall not exceed 50 milliamperes.

Barometric pressure (reduced):

MIL-STD-202, method 105, test condition C (70,000 ft).

Dielectric withstanding voltage: 1.5 times the rated dc voltage applied between either terminal and ground (case) for 1 to 5 seconds. Maximum charging current shall not exceed 50 milliamperes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

TABLE III. Electrical characteristics.

Dash number	Circuit	Rated voltage		Rated current (amps)	Capacitance (min)	Voltage drop	Minimum insertion loss (dB) in accordance with MIL-STD-220 1/																					
							+25°C										-55°C and +125°C 2/											
		V dc	3/ Vrms		pF	volts	1 MHz	5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz	10 GHz	1 MHz	5 MHz	10 MHz	20 MHz	50 MHz	100 MHz	200 MHz	500 MHz	1 GHz	10 GHz
0001 4/	π	200	140	10	1,500	.1	--	--	--	--	32	45	58	70	70	70	--	--	--	--	15	28	46	70	70	70
0002	"	200	140	10	1,500	.1	--	--	--	--	32	45	58	"	"	"	--	--	--	--	15	28	46	"	"	"
0003	"	500	350	25	2,000	.5	--	--	--	--	40	55	65	"	"	"	--	--	--	--	25	40	59	"	"	"
0004 4/	"	500	350	25	2,000	.5	--	--	--	--	40	55	65	"	"	"	--	--	--	--	25	40	59	"	"	"
0005 4/	"	200	140	10	1,500	.1	--	--	--	--	32	45	58	"	"	"	--	--	--	--	16	30	48	"	"	"
0006	"	200	140	"	1,500	"	--	--	--	--	32	45	58	"	"	"	--	--	--	--	"	"	"	"	"	"
0007	"	100	70	"	5,000	"	--	--	--	--	50	65	70	"	"	"	--	--	--	--	"	"	"	"	"	"
0008	"	100	70	"	1,000	"	--	--	--	--	50	"	70	"	"	"	--	--	--	--	20	35	55	"	"	"
0009	"	70	--	"	12,000	"	--	25	--	48	--	"	--	--	65	65	--	8	--	30	--	63	--	--	65	65
0010 4/	"	100	70	"	5,000	.5	--	--	--	--	50	"	--	65	70	70	--	--	--	--	16	30	--	65	70	70
0011	"	"	70	"	5,000	.5	--	--	--	--	50	"	--	"	70	70	--	--	--	--	16	30	--	"	70	70
0012	"	"	--	"	25,000	.1	--	15	--	60	60	"	--	"	65	65	--	13	--	27	58	70	--	"	65	65
0013	L_2	"	--	"	22,000	.1	10	--	30	--	--	42	45	--	60	60	8	--	28	--	--	40	43	--	60	60
0014	π	50	--	25	10,000	.5	--	--	20	--	50	65	70	--	70	70	--	--	18	--	48	63	70	70	70	70

1/ Insertion loss measurements between 1 MHz and 20 MHz, inclusive, shall be performed at full load. Insertion loss measurements above 20 MHz shall be performed at no load.

2/ For dash number 0012 measurements shall be performed at -65°C and +85°C.

3/ Zero to 400 Hz over the rated temperature range of -55°C to +125°C.

4/ Inactive for new design.

Source: https://assist.dla.mil -- Downloaded: 202640-18T07:27Z
Check the source to verify that this is the current version before use.

Insulation resistance: MIL-STD-202, method 302. The following details and exceptions shall apply:

Ambient temperature: 25°C ±3°C.

Test potential: 100 V dc or rated dc voltage, whichever is less.

Points of measurement: Between either terminal and ground (case).

Minimum insulation resistance: 10,000 megohms.

Voltage drop: See table III.

Terminal strength: MIL-STD-202, method 211, test condition A.

Applied force: 5 pounds.

Flashpoint of impregnant or potting compound: Not applicable.

Overload: In accordance with MIL-F-15733.

Measurements at 25°C after test: Insulation resistance shall meet initial requirements.

Resistance to soldering heat: MIL-STD-202, method 210, test condition B.

Thermal shock and immersion:

Thermal shock: MIL-STD-202, method 107.

Test condition A, except temperature at step 3 shall be 125°C +3°C, -0°C for all dash numbers except 0012.

Test condition A, except temperature at step 1 shall be -65°C +0°C, -3°C for dash number 0012.

Immersion: MIL-STD-202, method 104, test condition A.

Measurements after final cycle:

Dielectric withstanding voltage with 90 percent of initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 30 percent of the initial requirement.

Insertion loss (check test) shall meet the initial requirements.

Shock (specified pulse): MIL-STD-202, method 213, test condition I.

Electrical load: 100 percent of the rated voltage between terminals and case.

Measurements after test: Insertion loss (check test) shall meet initial requirements.

Vibration, high frequency: MIL-STD-202, method 204, test condition D(20G).

Electrical load: Loading voltage shall be applied between terminals and case. The electrical load shall be 100 percent of rated voltage and rated current.

Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent-open or short-circuiting.

Following the test, filters shall be subjected to and meet the initial requirements of the insertion loss (check test).

Radiographic inspection (quality conformance only) (applicable to dash numbers 0010 through 0012 only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

Filters shall be x-rayed in one plane at 90 degrees rotation perpendicular to their longitudinal axis. Any evidence of poor capacitor mounting or uneven soldering of capacitor to case shall be cause for rejection; rejected units shall be dissected and examined for poor workmanship or uneven soldering. Any defects noted shall require corrective action prior to acceptance of future lots.

Magnification during visual inspection shall be 2 power, minimum. Unless otherwise specified, one radiograph shall be taken of each unit. Filters shall be positioned to yield a longitudinal image of the body.

Moisture resistance: MIL-STD-202, method 107.

Test condition A, except that the temperature at step 3 shall be 125°C +3°C, -0°C for all dash numbers except 0012.

Test condition A, except that the temperature at step 1 shall be -65°C +0°C, -3°C for dash number 0012.

No measurements shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.

Initial measurements: Not applicable.

Polarization voltage: 100 V dc or rated dc voltage, whichever is less.

Measurements after 24 hours drying period:

Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 30 percent of the initial requirement.

Insertion loss (check test) shall meet the initial requirements.

Solderability: MIL-STD-202, method 208.

Number of terminations of each filter to be tested: 2.

Evaluation of the dipped terminals: The dipped surface of the terminals shall be at least 95 percent covered with a new, smooth solder coating. The remaining 5 percent of the terminal surface shall show only small pin holes or rough spots. These shall not be concentrated in one area. Bare base metal and areas where the solder dip failed to cover the original coating are indications of poor solderability and shall be cause for failure.

Life: MIL-STD-202, method 108, test condition D (1,000 hours).

Test temperature (by dash number):

0001 through 0011, 0013, 0014	-	125°C +4°C, -0°C
0012	-	85°C +4°C, -0°C.

Test voltage: For filters with ac and dc ratings or ac ratings only, the test voltage shall be 1.2 times ratd ac voltage. Filters with only dc ratings shall be tested at 1.4 times rated dc voltage.

Test current: Rated current.

Measurements after test:

Dielectric withstanding voltaye with 90 percent of the initial voltage applied for 5 ±1 seconds.

Insulation resistance shall be not less than 30 percent of the initial requirement.

Insertion loss (check test) shall meet the initial requirements.

Source: https://assist.dla.mil -- Downloaded: 202640-18T07:27Z
Check the source to verify that this is the currentversion before use.

Marking: Each filter shall be marked with the military part number, as shown below. In addition, full marking in accordance with MIL-F-15733 shall be marked on the unit package.

Part number: M15733/61- (dash number from table I).

Supersession data: Filters in this specification supersedes filters in MIL-F-15733/35(USAF), MIL-F-15733/36(USAF), MIL-F-15733/52(USAF), MIL-F-15733/47(USAF), MIL-F-15733/28, and MIL-F-15733/43(USAF).

Part number M15733/61-	Superseded part number
	Cancelled part numbers
0001	M15733/35-0001
0002	M15733/35-0002
0003	M15733/36-0001
0004	M15733/36-0002
0005	M15733/52-0001
0006	M15733/52-0002
0007	M15733/52-0003
0008	M15733/52-0004
0009	M15733/52-0005
0010	M15733/47-0001
0011	M15733/47-0002
0012	M15733/47-0003
0013	M15733/47-0005
0014	M15733/47-0004
	Inactive part numbers
0002	M15733/61-0001
0003	M15733/61-0004
0006	M15733/61-0005
0011	M15733/61-0010
0002	M15733/43-0001
0008	M15733/43-0002
0008	M15733/28-0001
0008	M15733/28-0002
0013	M15733/28-0003
0014	M15733/28-0004

Source: https://assist.dla.mil -- Downloaded: 202610-18T07:27Z
Check the source to verify that this is the current version before use.

QUALITY ASSURANCE PROVISIONS:

Qualification inspection: In accordance with MIL-F-15733, except that solderability shall be performed as an additional test in group III, following the moisture resistance test.

Quality conformance inspection: In accordance with MIL-F-15733 except as follows:

Group A: In accordance with MIL-F-15733 for dash numbers 0001, 0004, and 0005. Group A inspection for all other dash numbers shall be in accordance with table IV. Lots having greater than 10 percent rejects shall be considered reject lots. Reject lots, at the option of the manufacturer, may be reworked and submitted to 100 percent, group A inspection of table IV.

TABLE IV. Group A inspection.

Test or inspection	AQL (percent defective or 100% inspection)	
Voltage conditioning	100%	
Capacitance to ground	100%	
Dielectric withstanding voltage	100%	
Insulation resistance	100%	
Voltage drop	100%	
Insertion loss (check test)	100%	
Radiographic inspection 1/	100%	
	Major	Minor
Visual and mechanical inspection	1.0	4.0

1/ Applicable to dash numbers 0010 through 0012 only.

Revision letters are not used to denote changes due to the extensivess of the changes.

Custodians:
Army - ER
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
Navy - SH, YD
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - ME, AT, AV
Navy - MC, AS, OS
Air Force - 19

Agent:
DLA - ES

Preparing activity:
Navy - EC

(Project 5915-0244-1)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-F-15733/61B

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

Naval Electronic Systems Command
Washington, D. C. 20363

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL

FIRST CLASS PERMIT NO. 12503 WASHINGTON D C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20363

ATTN: ELEX 8111

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:27Z
Check the source to verify that this is the current version before use.