NOTE: The document identifier and heading have been changed on this page to reflect that this is a performance specification. There are no other changes to this document. The document identifier on subsequent pages has not been changed, but will be changed the next time this document is revised.


MIL-PRF-15733/63
12 November 1976
SUPERSEDING
MIL-F-15733/32(USAF)
6 October 1972


PERFORMANCE SPECIFICATION SHEET


FILTERS, RADIO INTERFERENCE, STYLE FL37


This specification is approved for use by all Departments and Agencies of the Department of Defense.


The complete requirements for procuring the filters described herein shall consist of this specification and the latest issue of MIL-F-15733.







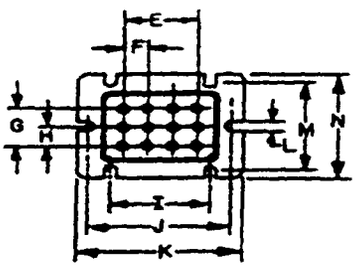



NOTES:
1. Dimensions are in inches.
2. Metric equivalents are in parentheses.
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
4. Item consists of twelve identical filter sections.
5. Circuit diagram is for information only.
6. Case is ground terminal.
7. Suggested mounting hole size and location for reference only.
8. Terminal identification shall be in accordance with figure above.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Supply Center, Columbus, 3990 East Broad Street, Columbus, OH 43216-5000, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 5915

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

TABLE I. Filter dimensions.

Type designation 1/2/	Dash no.	A		B		C		D	E	F	G	H	I	J	K	
		Min	Max	Min	Max	Min	Max	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Typ.	Min	Max
FL37GW1ED3	0001	.250 (6.35)	.312 (7.92)	1.093 (27.76)	1.157 (29.39)	.250 (6.35)	.312 (7.92)	.975 (24.77)	.656 (16.66)	.219 (5.56)	.418 (10.62)	.209 (5.31)	.875 (22.23)	1.250 (31.75)	1.422 (36.12)	1.452 (36.88)

See footnotes at end of table.

TABLE I. Filter dimensions - Continued.

L		M	N		P	Q	R	S		T	U	V	W		X	Y		Z
Min	Max	Typ.	Min	Max	Typ.	Typ.	Typ.	Min	Max	Typ.	Typ.	Typ.	Min	Max	Typ.	Min	Max	Typ.
.125 (3.18)	.135 (3.43)	1.00 (25.40)	1.172 (29.77)	1.202 (30.53)	.055 (1.40)	.100 (2.54)	.120 (3.05)	.562 (14.27)	.626 (15.90)	.710 (18.03)	1.010 (25.65)	1.265 (32.13)	.838 (21.29)	.848 (21.54)	.083 (2.11)	1.104 (28.04)	1.114 (28.30)	.078 (1.98)

1/ The letter "W" indicates the insertion loss versus frequency characteristics specified in table II.
2/ The letter "D" indicates the operating temperature range -55° C to +125° C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and table I.

Weight: .1092 pounds (49.5 grams).

Case: Metal.

Terminals: Solderable.

Operating temperature range: -55°C to +125°C; temperature characteristic D.

Rated voltage: 350 Vdc or 250 Vrms, to 400 Hz over the rated temperature range of -55°C to +125°C.

Rated current: 10 amperes, dc, or ac (rms).

Insertion loss characteristic: Symbol W (see table II).

Seal: Not applicable.

Capacitance to ground: Method 305, MIL-STD-202.
Test frequency: 1,000 Hz ±100 Hz.
Measured capacitance shall be at least 5,000 pF.

Temperature rise: 15°C, maximum.

Dielectric withstanding voltage: Method 301, MIL-STD-202.
Test voltage applied for 1 to 5 seconds: 1,050 Vdc.
Maximum charging current: 50 mA.

Barometric pressure (reduced): Method 105, test condition D, MIL-STD-202.
Dielectric withstanding voltage: In accordance with initial requirements, except the test voltage shall be 125 percent of the rated dc voltage.

Insulation resistance: Method 302, test condition A, MIL-STD-202.
Measured at 25°C between either terminal and the case shall be at least 10 G ohms.

Voltage drop: Not applicable.

Insertion loss: In accordance with MIL-F-15733.

Overload: In accordance with MIL-F-15733.
Measurements at +25°C after test:
Insulation resistance shall meet initial requirements.

Terminal strength: Method 211, test condition A, MIL-STD-202.
Applied force: 5 pounds.

Flashpoint of impregnant or potting compound: Not applicable.

Resistance to soldering heat: Method 210, test condition B, MIL-STD-202.

Salt spray (corrosion): Method 101, test condition B, MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

Thermal shock and immersion:
Thermal shock: Method 107, test condition A, MIL-STD-202, except that the temperature of step 3 shall be +125 C.
Immersion: Method 104, test condition A, MIL-STD-202.
Measurements after final cycle:
Dielectric withstanding voltage with 90 percent of initial voltage applied for 5 ±1 seconds.
Insulation resistance shall be not less than 1 G ohm.
Insertion loss (check test) shall meet the initial requirements.

Shock (specified pulse): Method 213, test condition I, MIL-STD-202.
Electrical load: 100 percent of rated voltage between terminals and case.
After completion of the shock test, filters shall be subjected to and shall meet the initial requirements of the insertion loss (check test).

Vibration, high frequency: Method 204, test condition D, MIL-STD-202.
Electrical load: Rated voltage, and rated current shall be applied continuously during test.
Test during vibration: During the last cycle in each direction, an electrical measurement shall be made to determine intermittent-open or short-circuiting.

Moisture resistance: Method 102, test condition D, MIL-STD-202, except that the temperature of step 3 shall be +125 C; no measurement shall be made before and after cycling. Filters shall then be tested in accordance with method 106, MIL-STD-202.
Initial measurements: Not applicable.
Polarization voltage: 100 Vdc.
Measurements after 24-hour drying period:
Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.
Insulation resistance shall be not less than 1 G ohm.
Insertion loss (check test) shall meet the initial requirements.

Life: Method 108, test condition D, MIL-STD-202.
Test temperature +125°C.
Test voltage: 1.2 times rated rms voltage.
Test current: 10 amperes.
Measurements after test:
Dielectric withstanding voltage with 90 percent of the initial voltage applied for 5 ±1 seconds.
Insulation resistance shall be not less than 1 G ohm.
Insertion loss (check test) shall meet the initial requirements.

TABLE II. Insertion loss versus frequency.

Dash number	Minimum insertion loss (dB) in accordance with MIL-STD-220, at +25°C				
	50 MHz	100 MHz	200 MHz	500 MHz	1-10 GHz
0001*	50	65	65	65	70

* Preferred for use in the design of equipment.

Part number: M15733/32-(dash number from table).

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - EL
Navy - EC
Air Force - 85

Review activities:
Army - EL, MU, MI, SG
Navy - SH
Air Force - 11, 17, 99
DSA - ES

User activities:
Army - ME, AT, AV, WC
Navy - CG, MC, AS, OS
Air Force - 19

Preparing activity:
Navy - EC

Agent:
DSA - ES

(Project 5915-0179)

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
NAVAL ELECTRONIC SYSTEMS COMMAND
WASHINGTON, D.C. 20360

POSTAGE AND FEES PAID
NAVY DEPARTMENT
DOD 316

OFFICAL BUSINESS

COMMANDER
NAVAL ELECTRONIC SYSTEMS COMMAND
DEFENSE STANDARDIZATION PROGRAM BRANCH
DEPARTMENT OF THE NAVY
WASHINGTON, D. C. 20360

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-18T07:28Z
Check the source to verify that this is the current version before use.